

| | | |
|--------------|--|---|
| PNT-1 | PAINT FINISH MANUFACTURER NUMBER COLOR TYPE FINISH LOCATION | - BENJAMIN MOORE - OC-65 - CHANTILLY LACE - INTERIOR ACRYLIC PAINT - EGGSHELL FINISH - WALLS AND EXPOSED STEEL, UNLESS OTHERWISE NOTED EXPOSED STEEL TO RECEIVE SATIN FINISH |
| PNT-2 | PAINT FINISH MANUFACTURER NUMBER COLOR TYPE FINISH LOCATION | - BENJAMIN MOORE - OC-117 - SIMPLY WHITE - INTERIOR ACRYLIC PAINT - MATTE FINISH - ALL EXPOSED GYPSUM BOARD CEILINGS, UNLESS OTHERWISE NOTED |
| PNT-3 | PAINT FINISH MANUFACTURER NUMBER COLOR TYPE FINISH LOCATION | - BENJAMIN MOORE - 2125-20 - DEEP SPACE - INTERIOR ACRYLIC PAINT - SATIN FINISH - HOLLOW METAL DOORS & FRAMES |
| PNT-4 | PAINT FINISH MANUFACTURER NUMBER COLOR TYPE FINISH LOCATION | - BENJAMIN MOORE - 2125-20 - DEEP SPACE - EXTERIOR/INTERIOR ACRYLIC PAINT - SATIN FINISH - ALL EXPOSED STEEL IN VEHICLE BAY CEILING (I.E. JOISTS AND DECK, CONDUITS, PIPES, ETC. REFER TO SPECIFICATIONS FOR COLOR FOR GAS AND SPRINKLER PIPES), SECTIONAL & FOUR FOLD DOOR JAMBS. |

| | | |
|-------------|--|------------------------|
| CT-1 | FLOOR TILE - DECO TILE - NUX SERIES - TAUPE 810 x 810 - GROUT MAPEI OR EQUIVALENT COLOUR TBD - BASE AT WALL: 100mm CT-1 BASE AT ALL WALL JOUNCTIONS - GROUT JOINTS: 1.5mm | SUBMITTAL REQ'D |
|-------------|--|------------------------|

| | | |
|-------------|---|------------------------|
| CT-2 | SHOWER FLOOR TILE - OLYMPIA TILE - OD QC.BLK 0202 FS - GROUT TO MATCH TILE COLOUR | SUBMITTAL REQ'D |
|-------------|---|------------------------|

| | | |
|--------------|--|------------------------|
| RSF-1 | RESILIENT SPORTS FLOOR - TUFLEX - SPARTUS 934 ROUGE - RUBBER BASE: JOHNSONITE MANDALAY-XX-H 4.5" 49 BEIGE | SUBMITTAL REQ'D |
|--------------|--|------------------------|

| | | |
|--------------|--|------------------------|
| C-SLD | SEALANT APPLIED TO CONCRETE BASE AND WALLS - UP TO 2200MM AFF - IN APPARATUS BAY AND HOSE TOWER | SUBMITTAL REQ'D |
|--------------|--|------------------------|

| | | |
|------------|------------------------------------|------------------------|
| CHC | SEALANT APPLIED TO CONCRETE | SUBMITTAL REQ'D |
|------------|------------------------------------|------------------------|

5 FLOOR FINISHES

1:25

| | | |
|------------------|---|------------------------|
| WT-1 10MM | WALL TILE DECO TILE - NUX SERIES 16X32 - TAUPE GROUT: MAPEI OR EQUIVALENT - COLOUR TBD | SUBMITTAL REQ'D |
|------------------|---|------------------------|

| | | |
|-----------------|--|------------------------|
| WT-5 6MM | CERAMIC TILE BACK SPLASH IN KITCHEN AND LAUNDRY. REFER TO ELEVATIONS CERAGRES - HEXA 4" - BRICK RED | SUBMITTAL REQ'D |
|-----------------|--|------------------------|

| | | |
|----------------|---|------------------------|
| HB 13MM | HIGH DENSITY POLYETHYLENE BOARD - FACE SCREW, MECHANICALLY FASTEN | SUBMITTAL REQ'D |
|----------------|---|------------------------|

6 WALL FINISHES

1:25



3 GROUND FLOOR FINISH PLAN
1:75

2 10-0050 - IS-INTERIOR SIGNS

WAYFINDING INTERIOR SIGNAGE

TYPE DANSIGN CURVE

FONT FUTURA MEDIUM & FUTURA HEAVY


COLOR

- INTERIOR SIGNS SHALL BE BLUE BACKGROUND WITH WHITE TEXT AND GRAPHICS.
- SURFACE TO HAVE MATTE NON-GLARE FINISH

BRAILLE AND TACTILE LETTERS

- BRAILLE SHALL BE OF "RASTER" METHOD E.G. HOLES DRILLED AND BALL BEARINGS INSERTED
- SUITABLY ROUNDED FOR EASY READING
- BRAILLE DOTS MUST HAVE A DOMED OR ROUNDED SHAPE
- BRAILING PROCESS USED AND APPLIED ON SIGNAGE SHALL NOT BE SUSCEPTIBLE TO VANDALISM
- BRAILLE SHALL BE INTEGRAL TO SIGN SURFACE/DESIGN
- TACTILE SIGNS SHALL HAVE LETTERING AND GRAPHICS THAT ARE RAISED 0.8MM TO 1.5MM ABOVE THE SURFACE OF THE SIGN
- BRAILLE IS REQUIRED TO BE LOWERCASE, EXCEPT FOR PROPER NOUNS, NAMES AND THE FIRST WORD OF SENTENCES OR INDIVIDUAL LETTERS OF THE ALPHABET
- THE BRAILLE TEXT/CHARACTERS SHALL ALWAYS BE PLACED IN THE SAME RELATIVE POSITION, MOUNTED NEAR THE BOTTOM EDGE OF SIGNAGE, BELOW OTHER TEXT, SYMBOLS OR TACTILE CHARACTERS. IF TEXT IS MULTILINE, BRAILLE SHALL BE PLACED BELOW ENTIRE TEXT
- ENSURE BRAILLE TEXT IS SEPARATED A MINIMUM OF 9.5MM FROM ANY OTHER TACTILE CHARACTERS
- WHERE TACTILE CHARACTERS ARE USED, ENSURE EDGES ARE BEVELED AND SMOOTH

NOTE: IT IS THE RESPONSIBILITY OF THE SIGN SUPPLIER TO VERIFY THAT A BRAILLE PROOFREADER HAS APPROVED FINAL ARTWORK. BRAILLE DOTS SHOWN IN THIS GUIDELINE ARE TO SHOW PLACEMENT ONLY

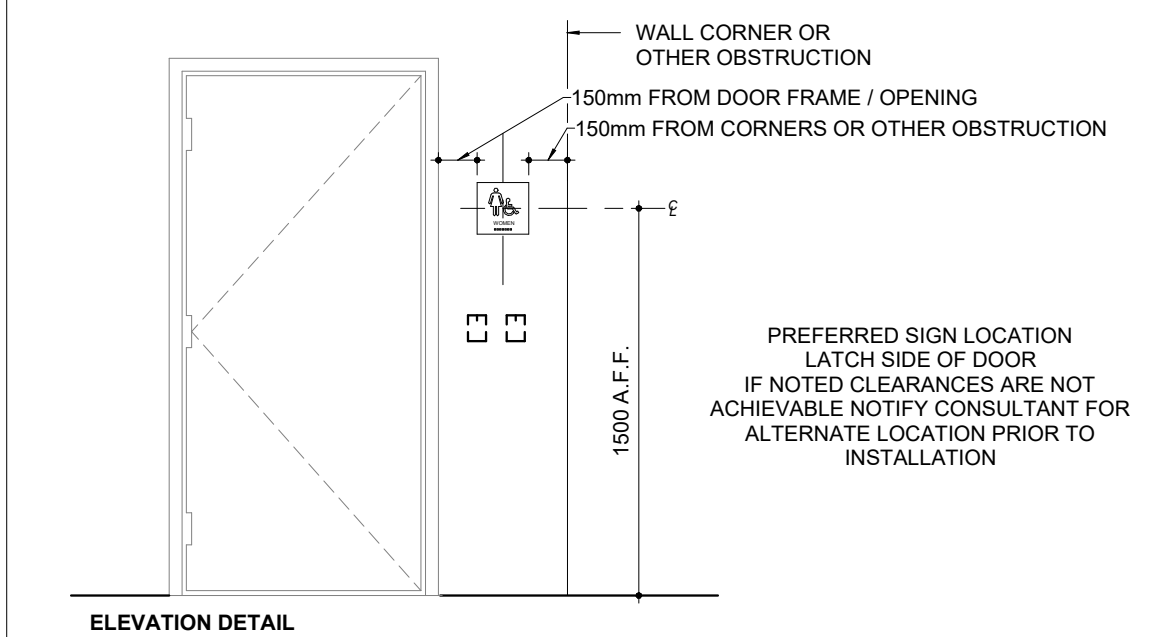

10-0050 - IS-INTERIOR SIGNS

OFFICE/ROOM SIGNS (CHANGEABLE MESSAGE)

TYPE DANSIGN PAPERFLEX CURVE SIGN WITH A MAGNETIC LOCKING SYSTEM AND TAMPER PROOF PAPER INSERT SYSTEM

MATERIAL LACQUERED ABS WITH EXTRUDED ALUMINUM BRACKETS

MESSAGE VINYL ROOM NUMBER ON HEADER PANEL AND PAPER INSERT WITH ROOM NAME OR OCCUPANT'S NAME

INSTALLATION MOUNTED AT 1500MM TO CENTRELIN ABOVE THE FINISHED FLOOR AND 150MM AWAY FROM THE DOOR FRAME - LATCH SIDE (SEE ELEVATION DETAIL)

ROOM SIGNS (PERMANENT MESSAGE)

MATERIAL LACQUERED ABS WITH EXTRUDED ALUMINUM BRACKETS

MESSAGE VINYL ROOM NUMBER ON HEADER PANEL AND VINYL ROOM NAME ON BODY PANEL

INSTALLATION MOUNTED AT 1500MM TO CENTRELIN ABOVE THE FINISHED FLOOR AND 150MM AWAY FROM THE DOOR FRAME - LATCH SIDE (SEE ELEVATION DETAIL)

WASHROOM SIGNS

MATERIAL LACQUERED ABS WITH EXTRUDED ALUMINUM BRACKETS

MESSAGE TACTILE TEXT AND PICTOGRAM AND BRAILLE

INSTALLATION MOUNTED AT 1500MM TO CENTRELIN ABOVE THE FINISHED FLOOR AND 150MM AWAY FROM THE DOOR FRAME - LATCH SIDE (SEE ELEVATION DETAIL)

- 1 GENERAL NOTES - FLOOR FINISHES**
- A700 GENERAL NOTES - FLOOR FINISHES
- ALL INTERIOR FINISHES SHALL COMPLY WITH THE REQUIREMENTS OF THE BUILDING CODE (LATEST REVISION) THE TERRAZZO, TILE & MARBLE ASSOCIATION OF CANADA (TTMAC) AND AUTHORITIES HAVING JURISDICTION.
 - REFER TO ROOM FINISH SCHEDULE FOR FLOOR AND BASE FINISHES.
 - ALL FLOOR FINISHES TO BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS INSTRUCTIONS AND PROJECT SPECIFICATION.
 - FLOOR TILES ARE TO BE INSTALLED IN PATTERNS AS INDICATED.
 - WHERE TILES ARE INDICATED TO BE INSTALLED IN A RUNNING BOND PATTERN, INSTALL IN A 1/5 RUNNING BOND PATTERN (20% OVERLAP) TO REDUCE LIPPAGE AS DEFINED BY TTMAC.
 - MOVEMENT JOINTS SHALL BE IN ACCORDANCE WITH TTMAC DOCUMENT 301MJ- (CURRENT REVISION).
 - UNLESS OTHERWISE NOTED, ALL FLOOR FINISHES TO BE INSTALLED PRIOR TO INSTALLATION OF MILLWORK.
 - NO SUBSTITUTIONS OF FLOOR FINISHES PERMITTED WITHOUT CONSULTANT WRITTEN APPROVAL.
 - CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION OF ALL FLOOR FINISHES FOR THE DURATION OF THE WORK.
 - CONTRACTOR TO PROVIDE PROTECTION OF ALL FINISHED CONCRETE FLOORS USING PREMANUFACTURED CARDBOARD TEMPORARY FLOOR PROTECTION (OR APPROVED EQUIVALENT) FOR THE DURATION OF THE WORK.
 - CONTRACTOR TO PROVIDE PROTECTION OF ALL FINISHED TILED FLOORS USING PREMANUFACTURED CARDBOARD TEMPORARY FLOOR PROTECTION (OR APPROVED EQUIVALENT) FOR THE DURATION OF THE WORK.
 - CHANGES IN FLOOR FINISH AT DOOR OPENINGS SHALL OCCUR UNDERNEATH THE DOOR (IN THE CLOSED POSITION) UNLESS OTHERWISE NOTED, WHERE THERE IS AN OPENING WITH NO DOOR, CHANGES IN FLOOR FINISH SHALL OCCUR AT THE MIDPOINT OF THE OPENING.
 - UNLESS NOTED OTHERWISE, TILE BASES SHALL BE 100MM HIGH MEASURED FROM THE ADJACENT FINISHED FLOOR.
 - WHERE A CHANGE OF FLOORING MATERIAL THICKNESS OCCURS, FEATHER FLOOR AS REQUIRED.

THE CONTENTS OF THIS DRAWING AND SPECIFICATIONS
REMAIN THE COPYRIGHT PROPERTY OF
THOMAS BROWN ARCHITECT INC.
AND MUST BE RETURNED UPON COMPLETION OF THE WORK.

| ISSUE OR REVISION | | |
|-------------------|--------------------|------------|
| NO. | ISSUED FOR | DATE |
| 12 | 2022 UPDATE | 2022-12-20 |
| 16 | DD CLIENT REVIEW | 2023-07-24 |
| 19 | ISSUED FOR RFPQ | 2023-10-19 |
| 24 | ISSUED FOR CLASS A | 2024-02-16 |
| 28 | T24-253 - IFT | 2024-04-15 |



FILE NO. SP.22.V.0191

CITY OF VAUGHAN
FIRE STATION 7-12

9511 WESTON ROAD, VAUGHAN

PROJECT :

CLIENT :



THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS PRIOR
TO COMMENCEMENT OF THE WORK. ANY DISCREPANCIES
ARE TO BE REPORTED TO THE CONSULTANT.


ARCHITECT
THOMASBROWNARCHITECTS
197 SPADINA AVENUE, SUITE 500 | TORONTO ONTARIO | M5T 2C8

PROFESSIONAL SEAL

DWG TITLE

FLOOR FINISH AND
FURNITURE PLAN

ORIENTATION

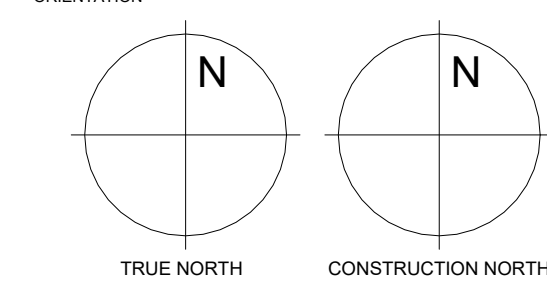

DATE 2021-11-24

SCALE As indicated DRAWN BY SRL

DWG STATUS :

TENDER

PROJECT NO.

2104

DRAWING NO.

A10.1

REVISION

26

2024-04-19 10:50:07 AM