

# DOOR HARDWARE

## 08 71 00

PROJECT:  **UHN** Toronto General  
Toronto Western  
Princess Margaret  
Toronto Rehab  
Michener Institute

Toronto Western Hospital – SEMC @ External Corridor  
399 Bathurst St. Toronto, Ontario

ARCHITECT: 

160 Pears Avenue, Suite 300  
Toronto, Ontario

Prepared By: Alex Bekmansourov

Date: October 2, 2024

Revised: October 10, 2024

Revised: October 22, 2024

Revised: October 23, 2024

Revised: October 29, 2024

Revised: October 31, 2024

Revised: November 15, 2024

## Architectural Hardware Finishes







	Steel	Stainless Steel	Brass/Bronze	Aluminum	Paint/Powder Coat	US/CAN
Clear Anodized				628	689	US28
Satin Nickel	646		619	670		US15
Polished Nickel	645		618	669		US14
Satin Stainless Steel		630				US32D
Polished Stainless Steel		629				US32
Satin Chrome	652		626	702		US26D
Polished Chrome	651		625	672		US26
Satin Brass	633		606	667	678	US4
Polished Brass	632		605	666	677	US5
Satin Bronze	639		612	668	680	US10
Oil Rubbed Bronze	640		613	703	695	US10B
Flat Black / Anodized Black	631		622	671	693	US19








# Door Handing's

## Abbreviations

RH = Right Hand	RHA = Right Hand Active	SS = Single Slider
LH = Left Hand	LHA = Left Hand Active	BP = Bi-Parting Slider
RHR = Right Hand Reverse	RHA/LHA = Right & Left Hands Active	BF = Bi-Folding Slider
LHR = Left Hand Reverse	RHRA/LHRA = Right & Left Hand Reverse Active	TS = Telescopic Slider
RHRA = Right Hand Reverse Active	DA = Double Acting	PKT = Pocket Slider
LHRA = Left Hand Reverse Active	DE = Double Egress	

**NOTE:** The handing of a swing door is determined by placing yourself on the secured or keyed side of the door.

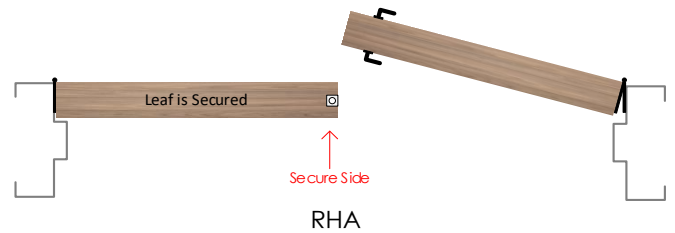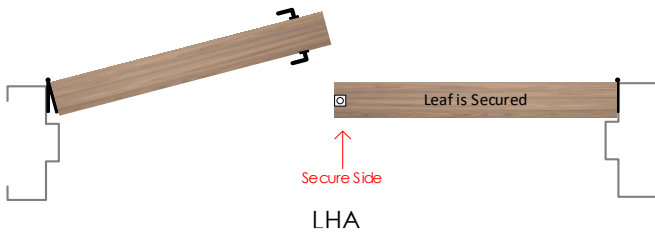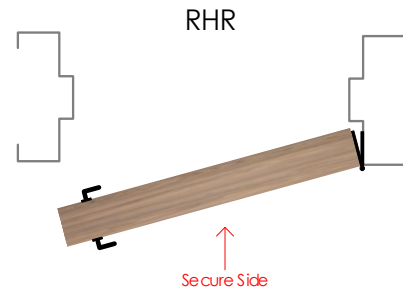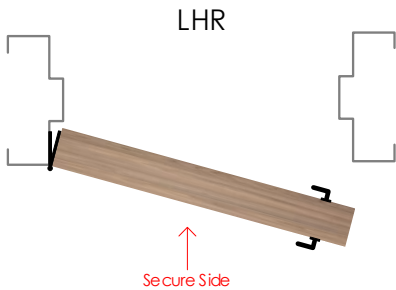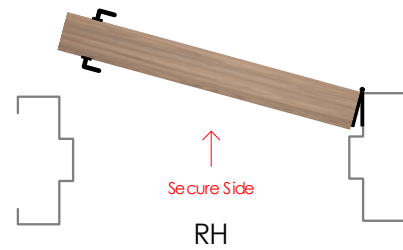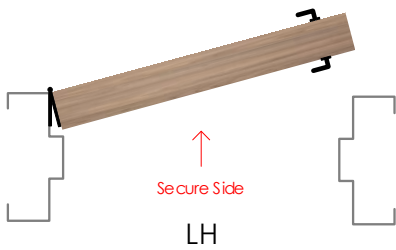

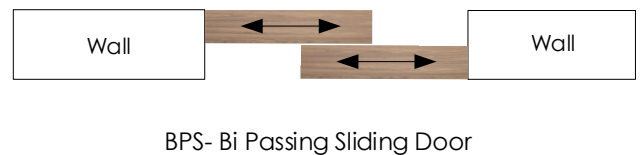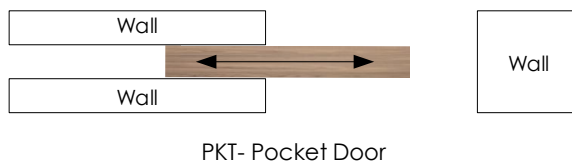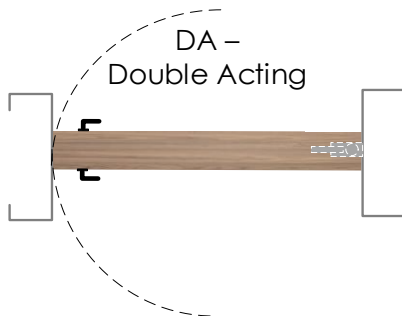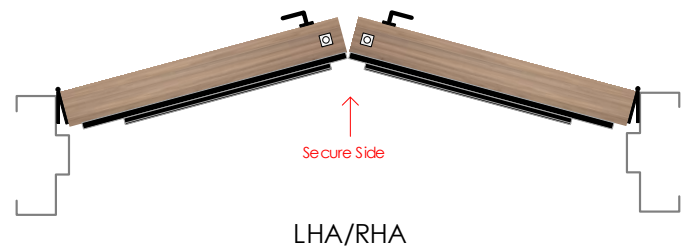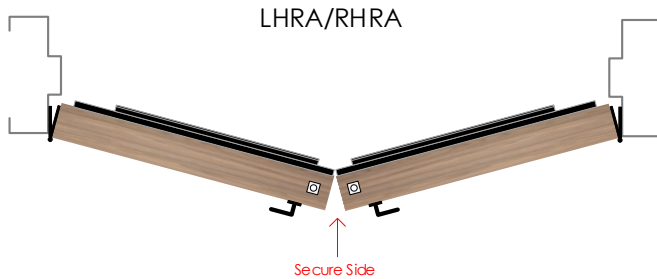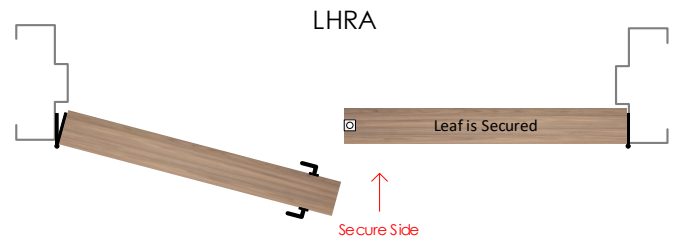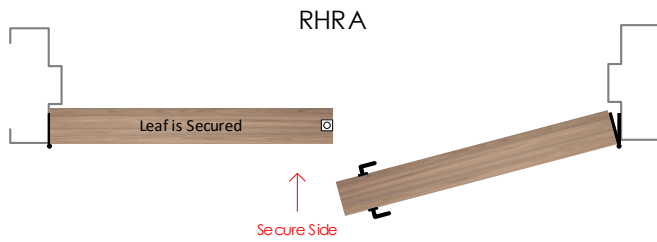



## Products & Alternatives

**NOTE:** Only those products / brands listed here are acceptable and should be used to form a bid price. No unsolicited products will be considered. If acceptable alternates are listed here those too can be used to form a bid price provided, they are exactly the same as the specified item. If using an alternate product to form a price it is the bidder's responsibility to ensure that product is identical in every way to the specified item. If no alternates are listed, no alternate products are acceptable.

Product Type	Product#	Manufacturer	Alternate Manufacturer 1	Alternate Manufacturer 2
Butt Hinge	TA314/386	McKinney	Stanley	Hager
Continuous hinge	C-FM_HD	Pemko	Select	Ives
Mortise Locks	8200 Series	Sargent	No Alternate	No Alternate
Exit Devices	8500 Series	Sargent	No Alternate	No Alternate
Exit Devices	35A Series (Only Where Specified)	Von Duprin	No Alternate	No Alternate
Closers	1431 Series	Sargent	No Alternate	No Alternate
Overhead Stop	6ADJ	Rixson	Glynn Johnson	ABH
Overhead Holder	1ADJ	Rixson	Glynn Johnson	ABH
Auto Operator	SW200i	Besam	No Alternate	No Alternate
Push to Lock Kit	CX-WC13XFM	Camden	No Alternate	No Alternate
Cylinders (Owner)	100200 W 26 N CTZ20	Medeco	No Alternate	No Alternate
Kickplates	K10A & K10F	Standard Metal	CBH	Gallery
Push Plates	K11	Standard Metal	CBH	Gallery
Door Pull	2012-3	Standard Metal	CBH	Gallery
Sound Seals	W-66	KN Crowder	NGP	Pemko
Auto Door bottoms	CT-51/CT-54	KN Crowder	NGP	Pemko

## Symbols



- Door has a fire rating and all associated hardware must have a fire label to suit. Must comply with local requirements.



- Door is automatic and is equipped with an auto operator. Door must meet local barrier free codes



- Door has an electrical requirement and requires power to be brought to the appropriate location above the door or to the latch, for either security or barrier free applications. Refer to security & electrical drawings for further information.



- Door requires security card access. Refer to security / electrical drawings for further information.

## Abbreviations

### Door:

HMD = Hollow Metal Door  
IHMD = Insulated Hollow Metal Door  
ALD = Aluminum Door  
IC-ALD = Insulated Clad Aluminum Door  
SCWD = Solid Core Wood Door  
HCWD = Hollow Core Wood Door  
FGD = Frameless Glass Door  
FRP = Fiberglass Reinforced Plastic Door  
OHD = Overhead Door

### Frame:

HMF = Hollow Metal Frame  
ALF = Aluminum Frame  
Cased Open HMF = Cased Open Hollow Metal Frame  
WDF = Wood Frame  
Cased Open WDF = Cased Open Wood Frame  
Cased Open Drywall = Cased Open Drywall

### Fire Ratings:

0 HR – Zero Hour Fire Rating / Smoke Barrier  
20 MIN – 20 Minute Fire Rating  
¾ HR – 45 Minute Fire rating  
1 ½ HR – 90 Minute Fire Rating  
2 HR – 120 Minute Fire Rating  
3 HR – 180 Minute Fire Rating

## Disclaimer

### Weblinks:

Weblinks do change from time to time as manufacturers move around their websites, please inform us if you have a none functioning weblink.



## HARDWARE SCHEDULE

Heading# 1

Opening Information					
Opening Type:	Existing	Opening Size:	Existing	STC Rating	None
Door Material:	Existing	Frame Material:	Existing	Fire Rating	None

4	Total Openings							
1	Door#	ST3-B	Location:	Exterior	From	Underground Parking	Handing:	RHR
1	Door#	1EW808	Location:	Corridor 1EW807A	to/from	Existing Corridor	Handing:	RH
1	Door#	1EW971	Location:	Stair #26 1EW971	From	Corridor 1EW807A	Handing:	LHR
1	Door#	1EW971A	Location:	Existing Area	From	Stair #26 1EW971	Handing:	LHR
1	Door#	1C02	Location:	Existing Area	From	Existing Area	Handing:	

\*EXISTING DOOR, FRAME AND HARDWARE TO REMAIN.





Heading#

2A

## Opening Information

<b>Opening Type:</b>	Pair	<b>Opening Size:</b>	2 x 1100 x 2135 x 45 (Double Egress)	<b>STC Rating</b>	None
<b>Door Material:</b>	ALD	<b>Frame Material:</b>	ALF	<b>Fire Rating</b>	1 1/2 HR

<b>1</b>	<b>Total Openings</b>						
1	<b>Door#</b>	1C01	<b>Location:</b>	Corridor 1EW807A	From	Existing Corridor	<b>Handing:</b> DE

Web Link

Site Verified

## By Fire Rated Aluminum Door &amp; Frame Provider.

1	Hardware Package	Pre-Tested Fire-Rated Double Egress Aluminum Door System complete with all required Hardware – Including: S/S Electrified Electric Latch Retraction Concealed Exit Devices with Remote Electric Dogging tied into Fire Alarm via ADO. Overhead Stops. (Less Bottom Latch for Exit Devices).	628 / US28 / Clear Anodized	TGP or Equal		<input type="checkbox"/>
---	------------------	---	-----------------------------	--------------	--	--------------------------

## By Automatics Supplier

1	Auto Operator (Pair) – Double Egress	2 x SW200i x Full Header – Double Egress Arms	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
1	Logic Relay	CX-33		Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard - BLK		BEA		<input type="checkbox"/>

## By Security Supplier

2	Card Reader	To Suit Building System	BLK			<input type="checkbox"/>
2	Door Contact	To Suit Building System				<input type="checkbox"/>
2	Rex Sensor	Included in Exit Device & ADO Push Column, Security to wire				<input type="checkbox"/>
1	Access Controller	To Suit Building System				<input type="checkbox"/>
1	Power Supply	Located in nearest IT Closet – By Security Provider				<input type="checkbox"/>
2	Mag Lock	To Suit Building System				<input type="checkbox"/>
1	FA Pull Station	To Suit Building System				<input type="checkbox"/>
1	FA Disconnect	To Suit Building System				<input type="checkbox"/>
1	Intercom/Buzzer System	To Suit Building System				<input type="checkbox"/>
2	Patient Release Reader	To Suit Building System				<input type="checkbox"/>

## By Owner

2	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	--------------------	---------------------	----------------------------	--------	--	--------------------------

Notes:

SPYDER SC





- 
- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
  - Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
  - Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

.....End of Heading.....



Heading#

2B

## Opening Information

Opening Type:	Pair	Opening Size:	1196 x 2752 x 45	STC Rating	None
Door Material:	ALD	Frame Material:	ALF	Fire Rating	None

1	Total Openings							
1	Door#	1C02	Location:	Exterior	From	Corridor	Handing:	RHR

Web Link

Site Verified

## By Hardware Supplier

4	Heavy Weight Hinge	TA386 x 112 x 114 NRP*	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Exit Device	35A-EO x 4'0	630 / US32D / Satin Stainless Steel	Von Duprin		<input type="checkbox"/>
1	Door Closer	351 x P10	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Drop Plate	351-A	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Drop Plate	351-B	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Overhead Stop	6ADJ-536	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Door Sweep	Provided by Aluminum Door Supplier	628 / US28 / Clear Anodized			<input type="checkbox"/>
1	Weatherstrip	Provided by Aluminum Door Supplier	628 / US28 / Clear Anodized			<input type="checkbox"/>
1	Threshold	Provided by Aluminum Door Supplier	628 / US28 / Clear Anodized			<input type="checkbox"/>

## By Security Supplier

1	Door Contact	To Suit Building System				<input type="checkbox"/>
1	Power Supply	Located in nearest IT Closet – By Security Provider				<input type="checkbox"/>
1	Mag Lock	To Suit Building System				<input type="checkbox"/>
1	FA Pull Station	To Suit Building System				<input type="checkbox"/>
1	FA Disconnect	To Suit Building System				<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.



- 
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider
  - **\*CONFIRM HINGE DESIGN\SIZE, DOOR PULLS & EXIT DEVICE MATCH FIRE-RATED ALUMINUM DOORS SPECIFIED ABOVE PRIOR TO ORDERING.**

**\*EXIT ONLY – NO OUTSIDE ACCESS**

---

End of Heading



Heading#

3

## Opening Information

Opening Type:	Pair	Opening Size:	2 x 977 x 2706 x 45	STC Rating	None
Door Material:	ALD	Frame Material:	ALF	Fire Rating	None

1	Total Openings							
1	Door#	1C03	Location:	SEMC Entrance Vestibule	From	Existing Area	Handing:	RHRA

Web Link

Site Verified

## By Hardware Supplier

8	Heavy Weight Hinge	TA386 x 112 x 114 NRP	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
2	Power Transfer	EPT-10	630 / US32D / Satin Stainless Steel	Von Duprin		<input type="checkbox"/>
1	Weatherized Elec. Exit Device	51xW x CBK x 630 x ER EX W x LD x 96 (TOP ROD ONLY)	630 / US32D / Satin Stainless Steel	Detex		<input type="checkbox"/>
1	Weatherized Elec. Exit Device	51xW x CBK x 630 x ER EX W x LD x 96 (TOP ROD ONLY)	630 / US32D / Satin Stainless Steel	Detex		<input type="checkbox"/>
2	Rim Cylinder	20-021 (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Schlage		<input type="checkbox"/>
2	Door Pull	GSH 165 x 1830 x #2 MTG	630 / US32D / Satin Stainless Steel	Gallery		<input type="checkbox"/>
2	Overhead Stop	104S x 630	689 / US28 / Painted Aluminum	Glynn Johnson		<input type="checkbox"/>
2	Door Sweep	Provided by Aluminum Door Supplier	628 / US28 / Clear Anodized			<input type="checkbox"/>
1	Weatherstrip	Provided by Aluminum Door Supplier	628 / US28 / Clear Anodized			<input type="checkbox"/>
2	Threshold	Provided by Aluminum Door Supplier	628 / US28 / Clear Anodized			<input type="checkbox"/>
2	Door Contact	DPS-M-GY	Grey	Securiton		<input type="checkbox"/>


## By Automatics Supplier

1	Auto Operator (Pair)	2 x SW200i x Full Header – Double Door	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
1	Logic Relay	CX-33		Camden		<input type="checkbox"/>
1	Bollard	CM-48-DSU-SS	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard - BLK		BEA		<input type="checkbox"/>

## By Security Supplier

SPYDER SC



1	Card Reader	To Suit Building System	BLK			<input type="checkbox"/>
2	Door Contact	Security to wire				<input type="checkbox"/>
2	Rex Sensor	Included in Exit Device & ADO Push Column, Security to wire				<input type="checkbox"/>
1	Access Controller	To Suit Building System				<input type="checkbox"/>
1	Power Supply	Located in nearest IT Closet – By Security Provider				<input type="checkbox"/>
By Owner						
2	Rim Cylinder	100400 W 26 N CTZ20 (*Consult Hardware Supplier prior to ordering)	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider
- **\*CONFIRM HINGE DESIGN \SIZE, DOOR PULLS & EXIT DEVICE MATCH FIRE-RATED ALUMINUM DOORS SPECIFIED ABOVE PRIOR TO ORDERING.**

-----End of Heading-----



Heading#

4

## Opening Information

Opening Type:	Pair	Opening Size:	2 x 1100 x 2135 x 45 (Double Egress)	STC Rating	None
Door Material:	ALD	Frame Material:	ALF	Fire Rating	1 1/2 HR

1	Total Openings							
1	Door#	1C04	Location:	SEMC Entrance Vestibule	From	External Corridor COR	Handing:	DE

Web Link

Site Verified

## By Fire Rated Aluminum Door &amp; Frame Provider.

1	Hardware Package	Pre-Tested Fire-Rated Double Egress Aluminum Door System complete with all required Hardware – Including: S/S Electrified Latch Retraction Concealed Exit Devices with Remote Electric Dogging tied into Fire Alarm via ADO. Overhead Stops. (Less Bottom Latch for Exit Devices).	628 / US28 / Clear Anodized	TGP or Equal		<input type="checkbox"/>
---	------------------	--	-----------------------------	--------------	--	--------------------------

## By Automatics Supplier

1	Auto Operator (Pair) – Double Egress	2 x SW200i x Full Header – Double Egress Arms	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
1	Logic Relay	CX-33		Camden		<input type="checkbox"/>
2	Bollard	CM-48-DSU-SS	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard - BLK		BEA		<input type="checkbox"/>

## By Owner

2	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	--------------------	---------------------	----------------------------	--------	--	--------------------------

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

-----End of Heading-----



Heading#

5

Opening Information					
Opening Type:	Pair	Opening Size:	2 x 965 x 2135 x 45	STC Rating	None
Door Material:	ALD	Frame Material:	ALF	Fire Rating	3/4 HR

1	Total Openings							
1	Door#	1C05	Location:	External Corridor COR	From	Corridor 1FP800	Handing:	LHR/RHR

Web Link

Site Verified

## By Fire Rated Aluminum Door &amp; Frame Provider.

1	Hardware Package	Pre-Tested Fire-Rated Aluminum Door System complete with all required Hardware – Including: S/S Electrified Latch Retraction Concealed Exit Devices with Remote Electric Dogging tied into Fire Alarm via ADO. Night Latch Cylinders on Both Doors. Overhead Stops. (Less Bottom Latch for Exit Devices).	628 / US28 / Clear Anodized	TGP or Equal		<input type="checkbox"/>
---	------------------	---	-----------------------------	--------------	--	--------------------------

## By Automatics Supplier

1	Auto Operator (Pair) – Double Egress	2 x SW200i x Full Header – Double Egress Arms	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
1	Logic Relay	CX-33		Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard - BLK		BEA		<input type="checkbox"/>

## By Security Supplier

1	Card Reader	To Suit Building System	BLK			<input type="checkbox"/>
2	Door Contact	To Suit Building System				<input type="checkbox"/>
2	Rex Sensor	Included in Exit Device & ADO Push Column, Security to wire				<input type="checkbox"/>
2	Access Controller	To Suit Building System				<input type="checkbox"/>
1	Power Supply	Located in nearest IT Closet – By Security Provider				<input type="checkbox"/>
2	Mag Lock	To Suit Building System				<input type="checkbox"/>
1	FA Pull Station	To Suit Building System				<input type="checkbox"/>
1	FA Disconnect	To Suit Building System				<input type="checkbox"/>
1	Intercom/Buzzer System	To Suit Building System				<input type="checkbox"/>
1	Patient Release Reader	To Suit Building System				<input type="checkbox"/>
1	Patient Transfer Reader	To Suit Building System				<input type="checkbox"/>

## By Owner

2	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	--------------------	---------------------	----------------------------	--------	--	--------------------------

SPYDER SC

26 Dale Crescent, Cookstown, Ontario, L0L 1L0

spydersc.com

416-910-8472

alex.b@spydersc.com

Page 15 of 66





## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

.....End of Heading.....

Heading# 6

\*HEADING RESERVED

.....End of Heading.....



Heading#

7

## Opening Information

Opening Type:	Pair	Opening Size:	2 x 965 x 2135 x 45	STC Rating	None
Door Material:	ALD	Frame Material:	ALF	Fire Rating	3/4 HR

1	Total Openings							
1	Door#	1C07	Location:	External Corridor COR	From	Corridor 1FP805	Handing:	LHR/RHR

Web Link

Site Verified

## By Fire Rated Aluminum Door &amp; Frame Provider.

1	Hardware Package	Pre-Tested Fire-Rated Aluminum Door System complete with all required Hardware – Including: S/S Electrified Latch Retraction Concealed Exit Devices with Remote Electric Dogging tied into Fire Alarm via ADO. Night Latch Cylinders on Both Doors. Overhead Stops. (Less Bottom Latch for Exit Devices).	628 / US28 / Clear Anodized	TGP or Equal		<input type="checkbox"/>
---	------------------	---	-----------------------------	--------------	--	--------------------------

## By Automatics Supplier

1	Auto Operator (Pair) – Double Egress	2 x SW200i x Full Header – Double Egress Arms	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
1	Logic Relay	CX-33		Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard - BLK		BEA		<input type="checkbox"/>

## By Security Supplier

1	Card Reader	To Suit Building System	BLK			<input type="checkbox"/>
2	Door Contact	To Suit Building System				<input type="checkbox"/>
2	Rex Sensor	Included in Exit Device & ADO Push Column, Security to wire				<input type="checkbox"/>
1	Access Controller	To Suit Building System				<input type="checkbox"/>
1	Power Supply	Located in nearest IT Closet – By Security Provider				<input type="checkbox"/>
1	FA Disconnect	To Suit Building System				<input type="checkbox"/>
1	Intercom/Buzzer System	To Suit Building System				<input type="checkbox"/>

## By Owner

2	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	--------------------	---------------------	----------------------------	--------	--	--------------------------

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider



End of Heading



Heading# 8

## Opening Information

<b>Opening Type:</b>	3-Leaf	<b>Opening Size:</b>	2743 x 2337 x 45 (Telescopic Sliding Door)	<b>STC Rating</b>	None
<b>Door Material:</b>	ALD	<b>Frame Material:</b>	ALF	<b>Fire Rating</b>	None

<b>1</b>	<b>Total Openings</b>						
1	<b>Door#</b>	1C08	<b>Location:</b>	Patient Transfer Vestibule	From	External Corridor COR	<b>Handing:</b> SS

Web Link

Site Verified

## By Automatic Sliding Door Supplier

1	Automatic Sliding Door System	Besam SL521 Telescopic Sliding Door System - Complete with breakout panels and sidelights, integrated Adams Rite panic bars, Auto Carriage Locks, Integrated Closers, Motion Sensors, Presence Sensors, Integrated Door Contacts, Single Rotary Key Switch to accept 1 1/4" Mortise cylinder in lieu of toggle jamb mounted.	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
---	-------------------------------	--	-----------------------------	-------	--	--------------------------

## By Security Supplier

1	Card Reader	To Suit Building System	BLK			<input type="checkbox"/>
1	Door Contact	To Suit Building System				<input type="checkbox"/>
1	Rex Sensor	Integrated into ADO System				<input type="checkbox"/>
1	Access Controller	To Suit Building System				<input type="checkbox"/>
1	Power Supply	Located in nearest IT Closet – By Security Provider				<input type="checkbox"/>


## By Owner

1	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	--------------------	---------------------	----------------------------	--------	--	--------------------------

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

End of Heading



Heading#

9

## Opening Information

<b>Opening Type:</b>	3-Leaf	<b>Opening Size:</b>	2743 x 2337 x 45 (Telescopic Sliding Door)	<b>STC Rating</b>	None
<b>Door Material:</b>	ALD	<b>Frame Material:</b>	ALF	<b>Fire Rating</b>	None

<b>1</b>	<b>Total Openings</b>							
1	<b>Door#</b>	1C09	<b>Location:</b>	Patient Transfer Vestibule	From	Patient Transfer Area	<b>Handing:</b>	SS

Web Link

Site Verified

## By Automatic Sliding Door Supplier

1	Automatic Sliding Door System	Besam SL521 Telescopic Sliding Door System - Complete with breakout panels and sidelights, integrated Adams Rite panic bars, Auto Carriage Locks, Integrated Closers, Motion Sensors, Presence Sensors, Integrated Door Contacts, Single Rotary Key Switch to accept 1 1/4" Mortise cylinder in lieu of toggle jamb mounted.	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
---	-------------------------------	--	-----------------------------	-------	--	--------------------------

## By Security Supplier

1	Card Reader	To Suit Building System	BLK			<input type="checkbox"/>
1	Door Contact	To Suit Building System				<input type="checkbox"/>
1	Rex Sensor	Integrated into ADO System				<input type="checkbox"/>
1	Access Controller	To Suit Building System				<input type="checkbox"/>
1	Power Supply	Located in nearest IT Closet – By Security Provider				<input type="checkbox"/>
1	Intercom/Buzzer	To Suit Building System				<input type="checkbox"/>
1	Patient Transfer Reader	To Suit Building System				<input type="checkbox"/>

## By Owner

1	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	--------------------	---------------------	----------------------------	--------	--	--------------------------

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

-----End of Heading-----



Updated Nov 15 2024











Heading# 10

Opening Information					
Opening Type:	Single	Opening Size:	965 x 2135 x 45	STC Rating	None
Door Material:	IHMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1C10	Location:	Exterior	From	Exit Stair C 1C	Handing:	LHR

Web Link

Site Verified

By Hardware Supplier					
3	Butt Hinge	TA314 – 127 x 114 x NRP	630 / US32D / Satin Stainless Steel	McKinney	 <input type="checkbox"/>
1	Exit Device	12-8510 x J x 630	630 / US32D / Satin Stainless Steel	Sargent	 <input type="checkbox"/>
1	Closer	1431-P9	689 / US28 / Painted Aluminum	Sargent	 <input type="checkbox"/>
1	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson	 <input type="checkbox"/>
1	Kickplate	K10A – 230 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal	 <input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder	 <input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 965	628 / US28 / Clear Anodized	KN Crowder	 <input type="checkbox"/>
1	Weather Strip	W-13 – 1 x 965 – 2 x 2135	628 / US28 / Clear Anodized	KN Crowder	 <input type="checkbox"/>
1	Threshold	CT-10 x 965	628 / US28 / Clear Anodized	KN Crowder	 <input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securitron	 <input type="checkbox"/>
By Security Supplier					
1	Door Contact	Provided By Hardware Supplier, Security to Wire			<input type="checkbox"/>
1	Mag Lock	To Suit Building System			<input type="checkbox"/>
1	FA Pull Station	To Suit Building System			<input type="checkbox"/>
1	FA Disconnect	To Suit Building System			<input type="checkbox"/>

**\*EXIT ONLY – NO OUTSIDE ACCESS**

- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider



End of Heading

Updated Nov 15 2024

Heading#

11

Opening Information					
Opening Type:	Pair	Opening Size:	2 x 600 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1C11	Location:	Exterior	From	Diesel Tank Area	Handing:	RHRA

Web Link

Site Verified

## By Hardware Supplier

6	Butt Hinge	TA314 – 127 x 114 x NRP	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Storeroom Lockset	8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
2	Closer	1431-P9	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
2	Overhead Stop	6ADJ-136	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Semi-Auto Flushbolt w/ Fire Pin	2849	630 / US32D / Satin Stainless Steel	Pemko		<input type="checkbox"/>
1	Co-Ordinator	2648	628 / US28 / Clear Anodized	Pemko		<input type="checkbox"/>
2	Mounting Bracket	2601AB	628 / US28 / Clear Anodized	Pemko		<input type="checkbox"/>
1	Kickplate	K10A – 230 x 562 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 6500	Black	KN Crowder		<input type="checkbox"/>
2	Auto Door Bottom	CT-54 x 600	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Weather Strip	W-13 – 1 x 1200 – 2 x 2135	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Threshold	CT-10 x 1200	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securitron		<input type="checkbox"/>

## By Owner

1	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	--------------------	---------------------	-------------------------------	--------	--	--------------------------



-----End of Heading-----

Heading# 12

Opening Information					
Opening Type:	Custom	Opening Size:	874 x 2207 x 50	STC Rating	None
Door Material:		Frame Material:		Fire Rating	None

1	Total Openings						
1	Door#	1C12	Location:		From	Exterior Mechanical Units	Handing:

**\*MECHANICAL FENCE DOOR & HARDWARE BY MECHANICAL FENCE DOOR SUPPLIER.**

-----End of Heading-----





Updated Nov 15 2024



Heading#

13

## Opening Information

Opening Type:	Single	Opening Size:	1 x 965 x 2135 x 45	STC Rating	None
Door Material:	SCWD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW450A	Location:	Corridor 1EW802	To	Kitchenette 1EW450A	Handing:	RH

Web Link

Site Verified


## By Hardware Supplier

3	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
+	<del>Classroom Lockset</del>	<del>8237-LNJ (Keyed Alike for Construction)</del>	<del>630 / US32D / Satin Stainless Steel</del>	<del>Sargent</del>		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securitron		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Kickplate	K10A – 230 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Kickplate	K10A – 230 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-51 x 965	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>

## By Security Supplier

1	Card Reader	To Suit Building System	BLK			<input type="checkbox"/>
1	Door Contact	Security to wire				<input type="checkbox"/>
1	Rex Sensor	Included in Exit Device, Security to wire				<input type="checkbox"/>

SPYDER SC



416-910-8472

26 Dale Crescent, Cookstown, Ontario, L0L 1L0

alex.b@spydersc.com

spydersc.com

Page 23 of 66



1	Access Controller	To Suit Building System				<input type="checkbox"/>
1	Power Supply	Located in nearest IT Closet – By Security Provider				<input type="checkbox"/>
By Owner						
1	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>

- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

-----End of Heading-----

Updated Nov 15 2024

Heading# 14

Opening Information					
Opening Type:	Single	Opening Size:	965 x 2450 x 45	STC Rating	None
Door Material:	SCWD	Frame Material:	ALF	Fire Rating	None

3	Total Openings							
1	Door#	1EW450C	Location:	Kitchenette 1EW450A	To	Meeting Room 1EW450C	Handing:	RH
1	Door#	1EW450D	Location:	Kitchenette 1EW450A	To	Meeting Room 1EW450D	Handing:	LH
1	Door#	1EW450E	Location:	Hoteling Area 1EW450B	To	Meeting Room 1EW450E	Handing:	LH

Web Link

Site Verified

By Hardware Supplier						
12	Butt Hinge	TA314 – 127 x 114*	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
3	Passage Latchset	8215-LNJ	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
3	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
3	Kickplate	K10A – 203 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
3	Kickplate	K10A – 203 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
3	Sound Seals	W-66 x 5850	Black	KN Crowder		<input type="checkbox"/>
3	Auto Door Bottom	CT-51 x 965	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>

\*Confirm Hinge Size with Aluminum Frame Provider prior to ordering.

-----End of Heading-----



Updated Nov 15 2024

Heading#

15

Opening Information					
Opening Type:	Single	Opening Size:	1 x 965 x 2135 x 45	STC Rating	None
Door Material:	SCWD	Frame Material:	HMF	Fire Rating	None

2	Total Openings							
1	Door#	1EW451	Location:	Corridor 1EW802	To	Consult Room 1EW451	Handing:	LH
1	Door#	1EW452	Location:	Corridor 1EW802	To	Consult Room 1EW452	Handing:	LH

Web Link

Site Verified

## By Hardware Supplier

6	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
2	Classroom Lockset	8237-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
2	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
2	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
2	Overhead Stop	2-426 (Hold Open)	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
2	Kickplate	K10A – 230 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
2	Kickplate	K10A – 230 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
2	Sound Seals	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
2	Auto Door Bottom	CT-51 x 965	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>

## By Owner

2	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	--------------------	---------------------	----------------------------	--------	--	--------------------------

\*MATCH EXISTING ADJACENT DOOR PANEL AND FRAME FINISH.

-----End of Heading-----



Updated Nov 15 2024










Heading# 16

Opening Information					
Opening Type:	Single	Opening Size:	1 x 915 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

2	Total Openings							
1	Door#	BEW430	Location:	Basement Corridor	From	SHAFT A	Handing:	LHR
1	Door#	BEW431	Location:	Basement Corridor	From	SHAFT B	Handing:	RHR

Web Link

Site Verified

By Hardware Supplier					
6	Butt Hinge	TA314 – 127 x 114 x NRP	630 / US32D / Satin Stainless Steel	McKinney	 <input type="checkbox"/>
2	Storeroom Lockset	8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent	 <input type="checkbox"/>
2	Closer	1431-P9	689 / US28 / Painted Aluminum	Sargent	 <input type="checkbox"/>
2	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson	 <input type="checkbox"/>
2	Kickplate	K10A – 230 x 876 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal	 <input type="checkbox"/>
2	Kickplate	K10A – 230 x 890 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal	 <input type="checkbox"/>
2	Sound Seals	W-66 x 5400	Black	KN Crowder	 <input type="checkbox"/>
2	Auto Door Bottom	CT-54 x 915	628 / US28 / Clear Anodized	KN Crowder	 <input type="checkbox"/>
By Owner					
2	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco	 <input type="checkbox"/>

.....End of Heading.....



Updated Nov 15 2024



Heading#

17

Opening Information					
Opening Type:	Single	Opening Size:	1 x 915 x 1675 x 45	STC Rating	None
Door Material:	IHMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	BEW432	Location:	Exterior Access Shaft	From	Crawl Space	Handing:	RHR

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Storeroom Lockset	8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Closer	1431-P9	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Kickplate	K10A – 230 x 876 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 915	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securitron		<input type="checkbox"/>
1	Weather Strip	W-13 – 1 x 915 – 2 x 2135	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Threshold	CT-10 x 915	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>

## By Security Supplier

1	Door Contact	Provided By Hardware Supplier, Security to Wire				
---	--------------	---	--	--	--	--

## By Owner

1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	-----------------	---------------------	----------------------------	--------	--	--------------------------

- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

-----End of Heading-----



Updated Nov 15 2024



Heading#

18

Opening Information					
Opening Type:	Single	Opening Size:	1 x 965 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW409	Location:	Corridor 1EW804	To	Office 1EW409	Handing:	LH

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securiton		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
+	Kickplate	K10A – 203 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
+	Kickplate	K10A – 203 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 965	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securiton		<input type="checkbox"/>

## By Security Supplier

1	Card Reader	By Security Supplier To Suit Building System	Black			
1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				

SPYDER SC



## By Owner

1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	-----------------	---------------------	-------------------------------	--------	--	--------------------------

- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

End of Heading

Updated Nov 15 2024



Heading# 19

## Opening Information

Opening Type:	Single	Opening Size:	1 x 1050 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW804	Location:	Corridor 1EW804	to/from	Corridor 1EW803	Handing:	LHR

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA386 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
+	Exit Device w/ Passage Lever Trim	12-8515 x J x ETJ x 630	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Exit Device w/ Storeroom Lever Trim	12-8504 x J x ETJ x 630	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Closer	1431-P9	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Overhead Stop	6ADJ-436	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
+	Kickplate	K10A – 203 x 1012 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
+	Kickplate	K10A – 203 x 1025 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
+	Auto Door Bottom	CT-51 x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-W-GY	Grey	Securitron		<input type="checkbox"/>

## By Security Supplier

SPYDER SC

26 Dale Crescent, Cookstown, Ontario, L0L 1L0

spydersc.com

416-910-8472

alex.b@spydersc.com

Page 29 of 66





2	Card Reader	By Security Supplier To Suit Building System	Black			
1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				
1	Magnetic Lock	By Security Supplier To Suit Building System				
1	FA Disconnect	By Security Supplier To Suit Building System				
2	FA Pull Station	By Security Supplier To Suit Building System				
By Owner						
+	Medeco Cylinder	<del>100200 W 26 N CTZ20</del>	<del>652 / US26D / Satin Chrome</del>	Medeco		
1	Rim Cylinder	100400 W 26 N CTZ20 (*Consult Hardware Supplier prior to ordering)	652 / US26D / Satin Chrome	Medeco		
By GC/Acrovyn Kickplate Provider.						
1	Acrovyn Armour Plate	Acrovyn Armour Plate 864mm x Undersized Door Width (Confirm Finish Prior to Ordering) – Push Side				

- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

.....End of Heading.....



Updated Nov 15 2024



Heading#

20

## Opening Information

Opening Type:	3-Leaf	Opening Size:	2438 x 2280 x 45 (3 Panel Telescopic Sliding ICU Door System)	STC Rating	None
Door Material:	ALD	Frame Material:	ALF	Fire Rating	None


## 2 Total Openings

1	Door#	1EW410	Location:	Corridor 1EW805	From	Exam Room 12 1EW410 (AIR)	Handing:	SS
1	Door#	1EW435	Location:	Corridor 1EW805	From	Exam Room 15 1EW435 (AIR)	Handing:	SS

Web Link

Site Verified

## By Sliding Door Supplier

2	Automatic Telescopic Sliding Door System	ASSA ABLOY VersaMax Touchless Slide 2.0 Automatic Telescopic ICU Door system, 3 Panels - Complete with breakout panel and all required hardware. Including All Presence Sensors, Power Off Switch, Centering Wheel, Active Leaf Dampeners and InteGlass Electric Glass Platform with electrostatic privacy glass insert and on/off <b>toggle to be wired to external switch. Add an Additional Mode of Operation Toggle which is to Be Integrated into Frame Stile.</b>	628 / US28 / Clear Anodized	ASSA		<input type="checkbox"/>
---	--	---	--------------------------------	------	---	--------------------------

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.

-----End of Heading-----



Updated Nov 15 2024

Heading#



21

Opening Information					
Opening Type:	3-Leaf	Opening Size:	2438 x 2280 x 45 (3 Panel Telescopic Sliding ICU Door System)	STC Rating	None
Door Material:	ALD	Frame Material:	ALF	Fire Rating	None

13	Total Openings							
1	Door#	1EW424	Location:	Corridor 1EW806	From	Palliative Exam Rm 11 1EW24	Handing:	SS
1	Door#	1EW425	Location:	Corridor 1EW806	From	Exam Room 10 1EW425	Handing:	SS
1	Door#	1EW426	Location:	Corridor 1EW806	From	Exam Room 9 1EW426	Handing:	SS
1	Door#	1EW427	Location:	Corridor 1EW806	From	Exam Room 8 1EW427	Handing:	SS
1	Door#	1EW429	Location:	Corridor 1EW806	From	Exam Room 7 1EW429	Handing:	SS
1	Door#	1EW433	Location:	Corridor 1EW805	From	Exam Room 13 1EW433	Handing:	SS
1	Door#	1EW434	Location:	Corridor 1EW805	From	Exam Room 14 1EW434	Handing:	SS
1	Door#	1EW438	Location:	Corridor 1EW807	From	Exam Room 6 1EW438	Handing:	SS
1	Door#	1EW440	Location:	Corridor 1EW807	From	Exam Room 5 1EW440	Handing:	SS
1	Door#	1EW441	Location:	Corridor 1EW807	From	Exam Room 4 1EW441	Handing:	SS
1	Door#	1EW442	Location:	Corridor 1EW807	From	Exam Room 3 1EW442	Handing:	SS
1	Door#	1EW443	Location:	Corridor 1EW807	From	Exam Room 2 1EW443	Handing:	SS
1	Door#	1EW444	Location:	Corridor 1EW807	From	Exam Room 1 1EW444	Handing:	SS

Web Link

Site Verified

By Sliding Door Supplier					
13	Manual Telescopic Sliding Door System	ASSA ABLOY VersaMax 2.0 Manual Telescopic ICU Door system, 3 Panels - Complete with breakout panel and all required hardware. Including Self Closing, Centering Wheel, Active Leaf Dampeners and InteGlass Electric Glass Platform with electrostatic privacy glass insert and on/off <b>toggle to be wired to external switch.</b>	628 / US28 / Clear Anodized	ASSA	 

.....End of Heading.....



Updated Nov 15 2024

Heading#











22

Opening Information					
Opening Type:	Single	Opening Size:	1 x 965 x 2235 x 45	STC Rating	None
Door Material:	SCWD	Frame Material:	HMF	Fire Rating	None

2	Total Openings							
1	Door#	1EW410A	Location:	Corridor 1EW805	To	Anteroom 1EW410A	Handing:	RH
1	Door#	1EW435A	Location:	Corridor 1EW805	To	Anteroom 1EW435A	Handing:	RH

Web Link

Site Verified

By Hardware Supplier					
6	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney	 <input type="checkbox"/>
2	<del>Passage Latchset</del>	8215-LNJ	<del>630 / US32D / Satin Stainless Steel</del>	<del>Sargent</del>	 <input checked="" type="checkbox"/>
2	Classroom Lockset	8237-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent	 <input type="checkbox"/>
2	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent	 <input type="checkbox"/>
2	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson	 <input type="checkbox"/>
2	Kickplate	K10A – 230 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal	 <input type="checkbox"/>
2	Kickplate	K10A – 230 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal	 <input type="checkbox"/>
2	Sound Seals	W-66 x 5500	Black	KN Crowder	 <input type="checkbox"/>
2	Auto Door Bottom	CT-51 x 965	628 / US28 / Clear Anodized	KN Crowder	 <input type="checkbox"/>
By Owner					
2	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco	 <input type="checkbox"/>

.....End of Heading.....



Updated Nov 15 2024



Heading#

23

## Opening Information

Opening Type:	Single	Opening Size:	1050 x 2135 x 45	STC Rating	None
Door Material:	SCWD	Frame Material:	HMF	Fire Rating	None

2	Total Openings							
1	Door#	1EW410B	Location:	Exam Room 12 (Air) 1EW410	To	Washroom 1EW410B	Handing:	DA
1	Door#	1EW435B	Location:	Exam Room 15 (Air) 1EW435	To	Washroom 1EW435B	Handing:	DA

Web Link

Site Verified

## By Hardware Supplier

2	Double Acting Hinge	DSH1000 x 2135	630 / US32D / Satin Stainless Steel	Markar		<input type="checkbox"/>
2	Emergency Release Stop	ERS-84-C-HT-RH-NOTCH	628 / US28 / Clear Anodized	Pemko		<input type="checkbox"/>
2	Storeroom Lockset	8204-LNJ	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
2	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
2	Overhead Stop	104S	630 / US32D / Satin Stainless Steel	Glynn Johnson		<input type="checkbox"/>
4	Kickplate	K10A – 230 x 935 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
2	Smoke/Sound Seal	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
2	Door Sweep	W-13S x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>

## By Automatics Supplier

2	Auto Operator	Besam SW200i – Pull Side – Breakaway Arm	628	Besam		<input type="checkbox"/>
2	Push-to-Lock-kit	CX-WC13XFM	<del>630 / US32D / Satin Stainless Steel</del>	Camden		<input type="checkbox"/>
2	Emergency Call Kit	CX-WEC10K2	<del>630 / US32D / Satin Stainless Steel</del>	Camden		<input type="checkbox"/>
4	LED Dome Light, w/ Sounder	CM-AF141SO	White	Camden		<input type="checkbox"/>
2	Emergency Signage	Custom – “ IN THE EVENT OF AN EMERGENCY PULL CORD FOR ASSISTANCE AND AUDIBLE AND VISUAL SIGNAL WILL ACTIVATE”				<input type="checkbox"/>
4	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Push Column	CM-7536SS/8B (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Indicator Light	CM-AF500	RED/GREEN	Camden		<input type="checkbox"/>

SPYDER SC



2	Logic Relay	CX-33		Camden		<input type="checkbox"/>
2	Magnetic Contact	CX-MDA		Camden		<input type="checkbox"/>
1	<b>Request for Assistance Actuator</b>	<b>Wire Up Strobes/Sounders to Nurse Call Station Pull Cord/Push Button</b>				
2	<b>Safety Sensor</b>	<b>Bodyguard - BLK</b>		<b>BEA</b>		<input type="checkbox"/>
By Owner						
2	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.

-----End of Heading-----

Updated Nov 15 2024



Heading#

24

Opening Information					
Opening Type:	Single	Opening Size:	1050 x 2135 x 45	STC Rating	None
Door Material:	SCWD	Frame Material:	HMF	Fire Rating	None

4	Total Openings							
1	Door#	1EW418	Location:	Corridor 1EW805A	To	Shower 1EW418	Handing:	DA
1	Door#	1EW420	Location:	Corridor 1EW805A	To	Patient Washroom 1EW420	Handing:	DA
1	Door#	1EW432	Location:	Corridor 1EW805	To	Patient Washroom 1EW432	Handing:	DA
1	Door#	1EW447	Location:	Corridor 1EW807	To	Universal Washroom 1EW447	Handing:	DA

Web Link

Site Verified

By Hardware Supplier						
4	Double Acting Hinge	DSH1000 x 2135	630 / US32D / Satin Stainless Steel	Markar		<input type="checkbox"/>
4	Emergency Release Stop	ERS-84-C-HT-RH-NOTCH	628 / US28 / Clear Anodized	Pemko		<input type="checkbox"/>
4	Storeroom Lockset	8204-LNJ	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
4	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
4	Overhead Stop	104S	630 / US32D / Satin Stainless Steel	Glynn Johnson		<input type="checkbox"/>



8	Kickplate	K10A – <b>230</b> x 935 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
4	Smoke/Sound Seal	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
4	Door Sweep	W-13S x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
By Automatics Supplier						
4	Auto Operator	Besam SW200i – Pull Side – Breakaway Arm	628	Besam		<input type="checkbox"/>
4	Push-to-Lock-kit	CX-WC13XFM	630 / US32D / Satin Stainless Steel	Camden		<input type="checkbox"/>
4	Emergency Call Kit	CX-WEC10K2	630 / US32D / Satin Stainless Steel	Camden		<input type="checkbox"/>
8	LED Dome Light, w/ Sounder	CM-AF141SO	White	Camden		<input type="checkbox"/>
4	Emergency Signage	Custom - IN THE EVENT OF AN EMERGENCY PULL CORD FOR ASSISTANCE AND AUDIBLE AND VISUAL SIGNAL WILL ACTIVATE.				
8	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
4	Push Column	CM-7536SS/8B (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
4	Indicator Light	CM-AF500	RED/GREEN	Camden		<input type="checkbox"/>
4	Logic Relay	CX-33		Camden		<input type="checkbox"/>
4	Magnetic Contact	CX-MDA		Camden		<input type="checkbox"/>
4	Safety Sensor	Bodyguard - BLK		BEA		<input type="checkbox"/>
By Owner						
4	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.

.....End of Heading.....



Updated Nov 15 2024

Heading#

25

Opening Information					
Opening Type:	Single	Opening Size:	1 x 965 x 2135 x 45	STC Rating	None
Door Material:	SCWD	Frame Material:	HMF	Fire Rating	None

2	Total Openings							
1	Door#	1EW410C	Location:	Exam Room 12 (Air) 1EW410	To	Anteroom 1EW410A	Handing:	LH
1	Door#	1EW435C	Location:	Exam Room 15 (Air) 1EW435	To	Anteroom 1EW435A	Handing:	LH

Web Link

Site Verified

## By Hardware Supplier

6	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
2	Passage Latchset	8215-LNJ	<del>630 / US32D / Satin Stainless Steel</del>	Sargent		<input checked="" type="checkbox"/>
2	Classroom Lockset	8237-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
2	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
2	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
2	Kickplate	K10A – 230 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
2	Kickplate	K10A – 230 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
2	Sound Seals	W-66 x 5500	Black	KN Crowder		<input type="checkbox"/>
2	Auto Door Bottom	CT-51 x 965	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>

## By Owner

2	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	-----------------	---------------------	-------------------------------	--------	--	--------------------------

.....End of Heading.....





Updated Nov 15 2024



Heading#

26

Opening Information					
Opening Type:	Single	Opening Size:	1 x 965 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW411	Location:	Corridor 1EW804	To	Shared Office 1EW411	Handing:	RH

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securiton		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
+	Kickplate	K10A – 203 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
+	Kickplate	K10A – 203 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 965	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securiton		<input type="checkbox"/>

## By Security Supplier

1	Card Reader	By Security Supplier To Suit Building System	Black			
1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				



1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>

- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

-----End of Heading-----

Updated Nov 15 2024

Heading# 27

Opening Information					
Opening Type:	Pair	Opening Size:	2 x 965 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW411A	Location:	Corridor 1EW804	From	Elec 1EW411A	Handing:	RHRA

Web Link

Site Verified

By Hardware Supplier						
6	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Storeroom Lockset	8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
2	Closer	1431-P9	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
2	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
2	Overhead Stop	2-426 (Hold Open)	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Semi-Auto Flushbolt w/ Fire Pin	2849	630 / US32D / Satin Stainless Steel	Pemko		<input type="checkbox"/>
1	Co-Ordinator	2676	628 / US28 / Clear Anodized	Pemko		<input type="checkbox"/>
2	Mounting Bracket	2601AB	628 / US28 / Clear Anodized	Pemko		<input type="checkbox"/>
2	Kickplate	K10A – 203 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
2	Kickplate	K10A – 203 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 6700	Black	KN Crowder		<input type="checkbox"/>



2	Auto Door Bottom	CT-54 x 965	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
By Owner						
1	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>

-----End of Heading-----

Updated Nov 15 2024



Heading# 28

## Opening Information

Opening Type:	Single	Opening Size:	1 x 1050 x 2235 x 45	STC Rating	None
Door Material:	SCWD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW412	Location:	Corridor 1EW805	To	Activities of Daily Life Living Suite 1EW412	Handing:	LH

Web Link

Site Verified

## By Hardware Supplier





3	Butt Hinge	TA386 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securitron		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Overhead Stop	6ADJ-436	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Kickplate	K10A – 230 x 1012 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Kickplate	K10A – 230 x 1025 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5600	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-51 x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-W-GY	Grey	Securitron		<input type="checkbox"/>

## By Automatics Supplier

1	Auto Operator	SW200i x Full Header – Pull Side	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
---	---------------	----------------------------------	--------------------------------	-------	--	--------------------------

SPYDER SC



2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard – BLK		BEA		<input type="checkbox"/>
1	Relay	CX-33	630	Camden		<input type="checkbox"/>
By Security Supplier						
1	Card Reader	By Security Supplier To Suit Building System	Black			
1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

.....End of Heading.....



Updated Nov 15 2024











Heading# 29

Opening Information					
Opening Type:	Single	Opening Size:	1 x 915 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW413	Location:	Corridor 1EW804	To	Staff W/C 1EW413	Handing:	RH

Web Link

Site Verified

By Hardware Supplier					
3	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney	 <input type="checkbox"/>
1	Standalone Keypad Privacy Set	KP-8276-LNJ-C32D-RH (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent	 <input type="checkbox"/>
1	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent	 <input type="checkbox"/>
1	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson	 <input type="checkbox"/>
1	Kickplate	K10A – 230 x 876 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal	 <input type="checkbox"/>
1	Kickplate	K10A – 230 x 890 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal	 <input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder	 <input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 915	628 / US28 / Clear Anodized	KN Crowder	 <input type="checkbox"/>
By Owner					
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco	 <input type="checkbox"/>
By GC/Acrovyn Kickplate Provider.					
2	Acrovyn Kickplate	Acrovyn Kickplate 230mm x Undersized Door Width (Confirm Finish Prior to Ordering)			 <input type="checkbox"/>

.....End of Heading.....



Updated Nov 15 2024



Heading#

30

## Opening Information

Opening Type:	Single	Opening Size:	1 x 1050 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW414	Location:	Corridor 1EW804	To	Staff B/F W/C 1EW414	Handing:	LH

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA386 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
+	<del>Standalone Keypad Privacy Set</del>	<del>KP-8276-LNJ-C32D-LH (Keyed Alike for Construction)</del>	<del>630 / US32D / Satin Stainless Steel</del>	<del>Sargent</del>		<input type="checkbox"/>
1	Storeroom Lockset	8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
+	<del>Closer</del>	<del>1431-O</del>	<del>689 / US28 / Painted Aluminum</del>	<del>Sargent</del>		<input type="checkbox"/>
1	Overhead Stop	6ADJ-436	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
+	<del>Kickplate</del>	<del>K10A – 230 x 1012 x 3M Tape</del>	<del>630 / US32D / Satin Stainless Steel</del>	<del>Standard Metal</del>		<input type="checkbox"/>
+	<del>Kickplate</del>	<del>K10A – 230 x 1025 x 3M Tape</del>	<del>630 / US32D / Satin Stainless Steel</del>	<del>Standard Metal</del>		<input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>

## By Automatics Supplier

1	Auto Operator	Besam SW200i – Pull Side	628	Besam		<input type="checkbox"/>
2	LED Dome Light, w/ Sounder	CM-AF141SO	White	Camden		<input type="checkbox"/>
1	Emergency Signage	Custom - IN THE EVENT OF AN EMERGENCY PULL CORD FOR ASSISTANCE AND AUDIBLE AND VISUAL SIGNAL WILL ACTIVATE.				
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
1	Push Column	CM-7536SS/8B (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>

SPYDER SC



1	Indicator Light	CM-AF500	RED/GREEN	Camden	X	<input checked="" type="checkbox"/>
1	Logic Relay	CX-33		Camden	X	<input checked="" type="checkbox"/>
1	Magnetic Contact	CX-MDA		Camden	X	<input checked="" type="checkbox"/>
1	Safety Sensor	Bodyguard - BLK		BEA	X	<input checked="" type="checkbox"/>
1	Stand Alone Keypad	CV-110SPK	S/S	Camden	X	<input checked="" type="checkbox"/>
By Owner						
4	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
By GC/Acrovyn Kickplate Provider.						
2	Acrovyn Kickplate	Acrovyn Kickplate 230mm x Undersized Door Width (Confirm Finish Prior to Ordering)				<input type="checkbox"/>

-----End of Heading-----

Updated Nov 15 2024



Heading# 31

Opening Information					
Opening Type:	Single	Opening Size:	1 x 1050 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW415	Location:	Corridor 1EW804	To	Storage B 1EW415	Handing:	RH

Web Link

Site Verified

By Hardware Supplier						
3	Butt Hinge	TA386 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securitron		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Overhead Stop	6ADJ-436	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Armour Plate	K10A – 864 x 1012 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>



+	Armour Plate	K10A – 864 x 1025 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		
1	Sound Seals	W-66 x 5800	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securitron		<input type="checkbox"/>
By Automatics Supplier						
1	Auto Operator	SW200i x Full Header – Pull Side	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard – BLK		BEA		<input type="checkbox"/>
1	Relay	CX-33	630	Camden		<input type="checkbox"/>
By Security Supplier						
1	Card Reader	By Security Supplier To Suit Building System	Black			
1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
By GC/Acrovyn Kickplate Provider.						
2	Acrovyn Kickplate	Acrovyn Kickplate 230mm x Undersized Door Width (Confirm Finish Prior to Ordering)				<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

.....End of Heading.....





Updated Nov 15 2024



Heading#

32

Opening Information					
Opening Type:	Single	Opening Size:	1 x 1050 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW417	Location:	Corridor 1EW804	To	Soiled Room 1EW417	Handing:	LH

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA386 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securiton		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Overhead Stop	6ADJ-436	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
+	Armour Plate	K10A – 864 x 1012 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
+	Armour Plate	K10A – 864 x 1025 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5800	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securiton		<input type="checkbox"/>

## By Automatics Supplier

1	Auto Operator	SW200i x Full Header – Pull Side	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard – BLK		BEA		<input type="checkbox"/>
1	Relay	CX-33	630	Camden		<input type="checkbox"/>

## By Security Supplier

1	Card Reader	By Security Supplier To Suit Building System	Black			
---	-------------	--	-------	--	--	--

SPYDER SC



1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
By GC/Acrovyn Kickplate Provider.						
1	Acrovyn Kickplate	Acrovyn Kickplate 230mm x Undersized Door Width (Confirm Finish Prior to Ordering)				<input type="checkbox"/>
1	Acrovyn Armour Plate	Acrovyn Armour Plate 864mm x Undersized Door Width (Confirm Finish Prior to Ordering) – Push Side				<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

-----End of Heading-----



Updated Nov 15 2024

Heading# 33

Opening Information					
Opening Type:	Single	Opening Size:	1 x 1050 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	0 HR

1	Total Openings							
1	Door#	1EW419	Location:	Corridor 1EW804	To	House Keeping 1EW419	Handing:	RH

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Standalone Keypad Lockset	KP-8278-LNJ-C32D-RH (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Storeroom Lockset	8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Overhead Stop	6ADJ-436	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Armour Plate	K10A – 864 x 1012 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Armour Plate	K10A – 864 x 1025 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Louver	SDL-FP – 12 x 24	695 / US108 / Painted Dark Bronze	KN Crowder		<input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
1	Smoke Seals	W-44 – 1 x 1050 – 2 x 2135	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>

## By Owner

1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	-----------------	---------------------	-------------------------------	--------	--	--------------------------

## By GC/Acrovyn Kickplate Provider.

2	Acrovyn Armour Plate	Acrovyn Armour Plate 864mm x Undersized Door Width (Confirm Finish Prior to Ordering) – Push Side				<input type="checkbox"/>
---	-------------------------	--	--	--	--	--------------------------



End of Heading

Updated Nov 15 2024



Heading#

34

## Opening Information

Opening Type:	Single	Opening Size:	1 x 1220 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW422	Location:	Corridor 1EW806	To	Clean Supply 1EW422	Handing:	LH

Web Link

Site Verified

## By Hardware Supplier


3	Butt Hinge	TA386 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securitron		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Overhead Stop	6ADJ-536	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
+	Armour Plate	K10A – 864 x 1182 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
+	Armour Plate	K10A – 864 x 1195 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5800	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 1220	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securitron		<input type="checkbox"/>

## By Automatics Supplier

1	Auto Operator	SW200i x Full Header – Pull Side	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard – BLK		BEA		<input type="checkbox"/>
1	Relay	CX-33	630	Camden		<input type="checkbox"/>

## By Security Supplier

SPYDER SC





1	Card Reader	By Security Supplier To Suit Building System	Black			
1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
By GC/Acrovyn Kickplate Provider.						
1	Acrovyn Kickplate	Acrovyn Kickplate 230mm x Undersized Door Width (Confirm Finish Prior to Ordering)				<input type="checkbox"/>
1	Acrovyn Armour Plate	Acrovyn Armour Plate 864mm x Undersized Door Width (Confirm Finish Prior to Ordering) – Push Side				<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

.....End of Heading.....



Updated Nov 15 2024



Heading#

35

Opening Information					
Opening Type:	Single	Opening Size:	1 x 1050 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW423	Location:	Corridor 1EW804	To	Storage A 1EW423	Handing:	RH

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA386 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securiton		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Overhead Stop	6ADJ-436	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
+	Armour Plate	K10A – 864 x 1012 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
+	Armour Plate	K10A – 864 x 1025 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5800	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securiton		<input type="checkbox"/>

## By Automatics Supplier

1	Auto Operator	SW200i x Full Header – Pull Side	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard – BLK		BEA		<input type="checkbox"/>
1	Relay	CX-33	630	Camden		<input type="checkbox"/>

## By Security Supplier

1	Card Reader	By Security Supplier To Suit Building System	Black			
---	-------------	--	-------	--	--	--

SPYDER SC



1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
By GC/Acrovyn Kickplate Provider.						
1	Acrovyn Kickplate	Acrovyn Kickplate 230mm x Undersized Door Width (Confirm Finish Prior to Ordering)				<input type="checkbox"/>
1	Acrovyn Armour Plate	Acrovyn Armour Plate 864mm x Undersized Door Width (Confirm Finish Prior to Ordering) – Push Side				<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

-----End of Heading-----



Updated Nov 15 2024



Heading#

36

Opening Information					
Opening Type:	Single	Opening Size:	1 x 965 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW431	Location:	Alcove D 1EW431B	To	Med Room 1EW431	Handing:	RH

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securitron		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Kickplate	K10A – 230 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Kickplate	K10A – 230 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5800	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 965	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securitron		<input type="checkbox"/>

## By Automatics Supplier

1	Auto Operator	SW200i x Full Header – Pull Side	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard – BLK		BEA		<input type="checkbox"/>
1	Relay	CX-33	630	Camden		<input type="checkbox"/>


## By Security Supplier

1	Card Reader	By Security Supplier To Suit Building System	Black			
---	-------------	--	-------	--	--	--

SPYDER SC





1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

.....End of Heading.....



Heading#

37

## Opening Information

Opening Type:	Single	Opening Size:	1101 x 2427 x 45	STC Rating	None
Door Material:	ALD	Frame Material:	ALF	Fire Rating	None

1	Total Openings							
1	Door#	1EW436	Location:	Exit 1EW436	From	Corridor 1EW807	Handing:	LHR

Web Link

Site Verified

## By Hardware Supplier

4	Butt Hinge	TA386 – 114 x 112 x NRP HT*	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Door Pull Set	GSH 167 x 2122 x #5 MTG (Back to Back)	630 / US32D / Satin Stainless Steel	Gallery		<input type="checkbox"/>
1	Sound Seals	W-66 x 6500	Black	KN Crowder		<input type="checkbox"/>
1	Door Sweep	Provided by Aluminum Door Supplier	628 / US28 / Clear Anodized			<input type="checkbox"/>

## By Automatics Supplier

1	Auto Operator	SW200i x Full Header – Pull Side	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard – BLK		BEA		<input type="checkbox"/>

## By Security Supplier

1	Push to Exit Button	To Suit Building System				<input type="checkbox"/>
1	Door Contact	To Suit Building System				<input type="checkbox"/>
1	Access Controller	To Suit Building System				<input type="checkbox"/>
1	Power Supply	Located in nearest IT Closet – By Security Provider				<input type="checkbox"/>
1	Mag Lock	To Suit Building System				<input type="checkbox"/>
1	FA Pull Station	To Suit Building System				<input type="checkbox"/>
1	FA Disconnect	To Suit Building System				<input type="checkbox"/>

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- **\*CONFIRM HINGE DESIGN/SIZE, DOOR PULLS & EXIT DEVICE MATCH FIRE-RATED ALUMINUM DOORS SPECIFIED ABOVE PRIOR TO ORDERING.**



End of Heading



Heading#

38

## Opening Information

Opening Type:	Single	Opening Size:	1220 x 2719 x 45	STC Rating	None
Door Material:	ALD	Frame Material:	ALF	Fire Rating	None

1	Total Openings							
1	Door#	1EW436A	Location:	Exterior	From	Exit 1EW436	Handing:	LHR

Web Link

Site Verified

## By Hardware Supplier

4	Butt Hinge	TA386 –114 x 112 x NRP HT*	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	EPT-10	630 / US32D / Satin Stainless Steel	Von Duprin		<input type="checkbox"/>
1	Elec. Exit Device	RX-LX-QEL-35A-NL-OP-F x 388NL x 4'0	630 / US32D / Satin Stainless Steel	Von Duprin		<input type="checkbox"/>
1	Rim Cylinder	20-021 (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Schlage		<input type="checkbox"/>
1	Door Pull	GSH 165 x 2414 x #2 MTG	630 / US32D / Satin Stainless Steel	Gallery		<input type="checkbox"/>
1	Overhead Stop	6ADJ-536	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Sound Seals	W-66 x 6500	Black	KN Crowder		<input type="checkbox"/>
1	Weatherstrip	Provided by Aluminum Door Supplier	628 / US28 / Clear Anodized			<input type="checkbox"/>
1	Threshold	Provided by Aluminum Door Supplier	628 / US28 / Clear Anodized			<input type="checkbox"/>
1	Door Sweep	Provided by Aluminum Door Supplier	628 / US28 / Clear Anodized			<input type="checkbox"/>


## By Automatics Supplier

1	Auto Operator	SW200i x Full Header – Pull Side	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard – BLK		BEA		<input type="checkbox"/>
1	Relay	CX-33	630	Camden		<input type="checkbox"/>
1	Bollard	CM-48-DSU-SS	630	Camden		<input type="checkbox"/>

## By Security Supplier

SPYDER SC



1	Intercom/Buzzer System	To Suit Building System				<input type="checkbox"/>
1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Exit Device Security To Wire				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Rim Cylinder	100400 W 26 N CTZ20 (*Consult Hardware Supplier prior to ordering)	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- **\*CONFIRM HINGE DESIGN/SIZE, DOOR PULLS & EXIT DEVICE MATCH FIRE-RATED ALUMINUM DOORS SPECIFIED ABOVE PRIOR TO ORDERING.**

-----End of Heading-----



Updated Nov 15 2024

Heading# 39

Opening Information					
Opening Type:	Single	Opening Size:	1 x 965 x 2135 x 45	STC Rating	None
Door Material:	SCWD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW445	Location:	Corridor 1EW807A	To	Family Room 1EW445	Handing:	RH

Web Link

Site Verified

By Hardware Supplier					
3	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney	 <input type="checkbox"/>
1	Passage Latchset	8215-LNJ	630 / US32D / Satin Stainless Steel	Sargent	 <input type="checkbox"/>
1	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent	 <input type="checkbox"/>
1	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson	 <input type="checkbox"/>
1	Kickplate	K10A – 230 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal	 <input type="checkbox"/>
1	Kickplate	K10A – 230 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal	 <input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder	 <input type="checkbox"/>
1	Auto Door Bottom	CT-51 x 965	628 / US28 / Clear Anodized	KN Crowder	 <input type="checkbox"/>

.....End of Heading.....



Updated Nov 15 2024



Heading#

40

Opening Information					
Opening Type:	Single	Opening Size:	1 x 965 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW446	Location:	Corridor 1EW807A	To	Staff Lounge 1EW446	Handing:	LH

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securitron		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
+	Kickplate	K10A – 203 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
+	Kickplate	K10A – 203 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 965	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securitron		<input type="checkbox"/>

## By Security Supplier

1	Card Reader	By Security Supplier To Suit Building System	Black			
1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				



1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
By GC/Acrovyn Kickplate Provider.						
1	Acrovyn Kickplate	Acrovyn Kickplate 230mm x Undersized Door Width (Confirm Finish Prior to Ordering)				<input type="checkbox"/>

- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

-----End of Heading-----

Updated Nov 15 2024



Heading# 41

Opening Information					
Opening Type:	Single	Opening Size:	1 x 1050 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	3/4 HR

1	Total Openings							
1	Door#	1EW448	Location:	Corridor 1EW807A	To	IT Closet 1EW448	Handing:	LH

Web Link

Site Verified

By Hardware Supplier						
3	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securitron		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Closer	1431-O	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
1	Overhead Stop	6ADJ-436	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
+	Kickplate	K10A – 230 x 1012 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
+	Kickplate	K10A – 203 x 1025 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder		<input type="checkbox"/>

SPYDER SC



1	Auto Door Bottom	CT-54 x 1050	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securitron		<input type="checkbox"/>
By Security Supplier						
1	Card Reader	By Security Supplier To Suit Building System	Black			
1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
By GC/Acrovyn Kickplate Provider.						
1	Acrovyn Kickplate	Acrovyn Kickplate 230mm x Undersized Door Width (Confirm Finish Prior to Ordering)				<input type="checkbox"/>

- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

.....End of Heading.....





Updated Nov 15 2024



Heading#

42

Opening Information					
Opening Type:	Single	Opening Size:	1 x 1220 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	1EW449	Location:	Corridor 1EW807A	To	Storage C 1EW449	Handing:	LH

Web Link

Site Verified

## By Hardware Supplier

3	Butt Hinge	TA386 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Power Transfer	CEPT-10	630 / US32D / Satin Stainless Steel	Securiton		<input type="checkbox"/>
1	Storeroom Lockset C/W REX	RX-8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
1	Electric Strike	1006CS	630 / US32D / Satin Stainless Steel	HES		<input type="checkbox"/>
1	Overhead Stop	6ADJ-536	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
+	Armour Plate	K10A – 864 x 1182 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
+	Armour Plate	K10A – 864 x 1195 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 5800	Black	KN Crowder		<input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 1220	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securiton		<input type="checkbox"/>

## By Automatics Supplier

1	Auto Operator	SW200i x Full Header – Pull Side	628 / US28 / Clear Anodized	Besam		<input type="checkbox"/>
2	Push Column	CM-7536SS/4 (Confirm Finish Prior to Ordering)	630	Camden		<input type="checkbox"/>
2	Safety Sensor	Bodyguard – BLK		BEA		<input type="checkbox"/>
1	Relay	CX-33	630	Camden		<input type="checkbox"/>

## By Security Supplier

1	Card Reader	By Security Supplier To Suit Building System	Black			
---	-------------	--	-------	--	--	--

SPYDER SC



1	Door Controller	By Security Supplier To Suit Building System				
1	Power Supply	Powered By Security Panel				
1	Rex Sensor	Built Into Lockset Security To Wire				
1	Door Contact	Provided By Hardware Supplier, Security to Wire				
By Owner						
1	Medeco Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
By GC/Acrovyn Kickplate Provider.						
1	Acrovyn Kickplate	Acrovyn Kickplate 230mm x Undersized Door Width (Confirm Finish Prior to Ordering)				<input type="checkbox"/>

## Notes:

- 120VAC is required at the head of the door for all barrier free door operators, 15A dedicated circuit. Wall/Frame must be reinforced for automatic operator mounting, all conduit and back boxes with pull cords are to be provided by the electrical contractor.
- Electrician to confirm wire locations with auto door operator supplier prior to pulling wires.
- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider

-----End of Heading-----



Updated Nov 15 2024



Heading#

43

Opening Information					
Opening Type:	Pair	Opening Size:	2 x 965 x 2135 x 45	STC Rating	None
Door Material:	HMD	Frame Material:	HMF	Fire Rating	3/4 HR

1	Total Openings							
1	Door#	1FP805	Location:	Corridor 1FP805	From	Storage Closet	Handing:	RHRA

Web Link

Site Verified

## By Hardware Supplier

6	Butt Hinge	TA314 – 127 x 114 x NRP HT	630 / US32D / Satin Stainless Steel	McKinney		<input type="checkbox"/>
1	Storeroom Lockset	8204-LNJ (Keyed Alike for Construction)	630 / US32D / Satin Stainless Steel	Sargent		<input type="checkbox"/>
2	Closer	1431-P9	689 / US28 / Painted Aluminum	Sargent		<input type="checkbox"/>
2	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson		<input type="checkbox"/>
1	Semi-Auto Flushbolt w/ Fire Pin	2849	630 / US32D / Satin Stainless Steel	Pemko		<input type="checkbox"/>
1	Co-Ordinator	2676	628 / US28 / Clear Anodized	Pemko		<input type="checkbox"/>
2	Mounting Bracket	2601AB	628 / US28 / Clear Anodized	Pemko		<input type="checkbox"/>
2	Kickplate	K10A – 230 x 927 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
2	Kickplate	K10A – 230 x 940 x 3M Tape	630 / US32D / Satin Stainless Steel	Standard Metal		<input type="checkbox"/>
1	Sound Seals	W-66 x 6700	Black	KN Crowder		<input type="checkbox"/>
2	Auto Door Bottom	CT-54 x 965	628 / US28 / Clear Anodized	KN Crowder		<input type="checkbox"/>

## By Owner

1	Permanent Cylinder	100200 W 26 N CTZ20	652 / US26D / Satin Chrome	Medeco		<input type="checkbox"/>
---	--------------------	---------------------	-------------------------------	--------	--	--------------------------



Updated Nov 15 2024











Heading# 44

Opening Information					
Opening Type:	Single	Opening Size:	914 x 2135 x 45* (CONFIRM)	STC Rating	None
Door Material:	IHMD	Frame Material:	HMF	Fire Rating	None

1	Total Openings							
1	Door#	ST3-B	Location:	Exterior	From	Exit Stair 1EW422I	Handing:	RHR

Web Link

Site Verified

By Hardware Supplier					
3	Butt Hinge	TA314 – 127 x 114 x NRP	630 / US32D / Satin Stainless Steel	McKinney	 <input type="checkbox"/>
1	Exit Device	12-8510 x F* x 630 (Confirm Rail size based on door width)	630 / US32D / Satin Stainless Steel	Sargent	 <input type="checkbox"/>
1	Closer	1431-P9	689 / US28 / Painted Aluminum	Sargent	 <input type="checkbox"/>
1	Overhead Stop	6ADJ-336	630 / US32D / Satin Stainless Steel	Rixson	 <input type="checkbox"/>
1	Kickplate	K10A – 230 x 867* x 3M Tape (Confirm)	630 / US32D / Satin Stainless Steel	Standard Metal	 <input type="checkbox"/>
1	Sound Seals	W-66 x 5400	Black	KN Crowder	 <input type="checkbox"/>
1	Auto Door Bottom	CT-54 x 914 (Confirm)	628 / US28 / Clear Anodized	KN Crowder	 <input type="checkbox"/>
1	Weather Strip	W-13 – 1 x 915 – 2 x 2135 (Confirm)	628 / US28 / Clear Anodized	KN Crowder	 <input type="checkbox"/>
1	Threshold	CT-10 x 915 (Confirm)	628 / US28 / Clear Anodized	KN Crowder	 <input type="checkbox"/>
1	Door Contact	DPS-M-GY	Grey	Securitron	 <input type="checkbox"/>
By Security Supplier					
1	Door Contact	Provided By Hardware Supplier, Security to Wire			<input type="checkbox"/>
1	Mag Lock	To Suit Building System			<input type="checkbox"/>
1	FA Pull Station	To Suit Building System			<input type="checkbox"/>
1	FA Disconnect	To Suit Building System			<input type="checkbox"/>

**\*EXIT ONLY – NO OUTSIDE ACCESS****\*Confirm existing door's size prior to ordering hardware above. Adjust as required.**

- Final commissioning of all access control items, such as but not limited to electric strikes, Rex sensors, Door contacts, Electrified Panics, Relays & Maglocks is the responsibility of the security provider



---

-----End of Heading-----

**END OF SCHEDULE**