



1 PATIENT WASHROOM - 3201 1 : 48



9 PATIENT WASHROOM - 3203 & 3208 1 : 48

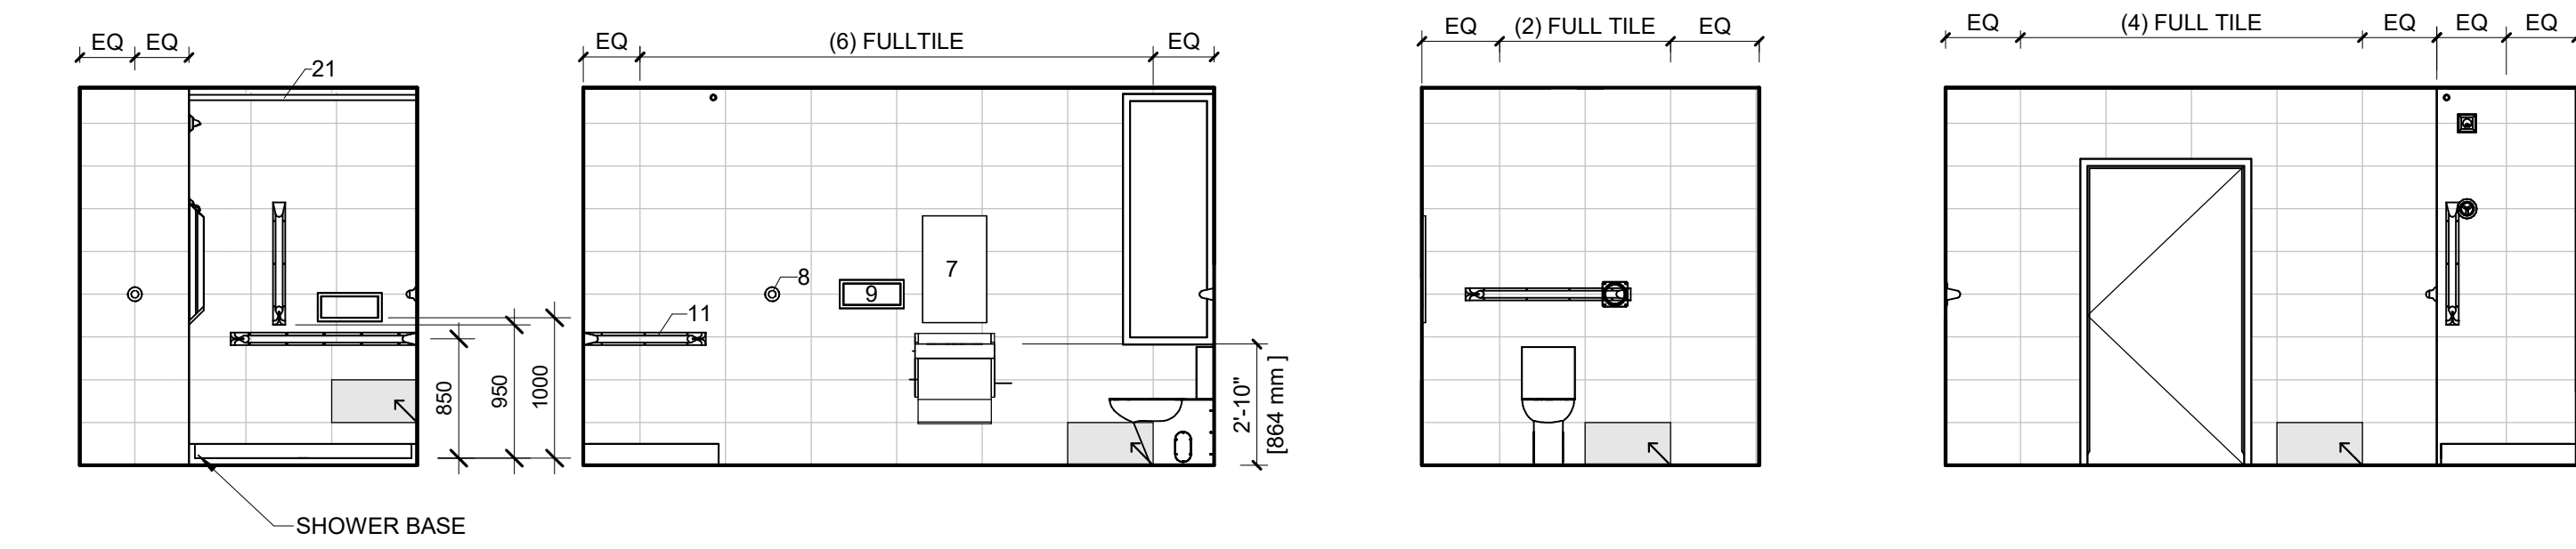

10 ENSUITE WASHROOM - 3205A & 3206A 1 : 48

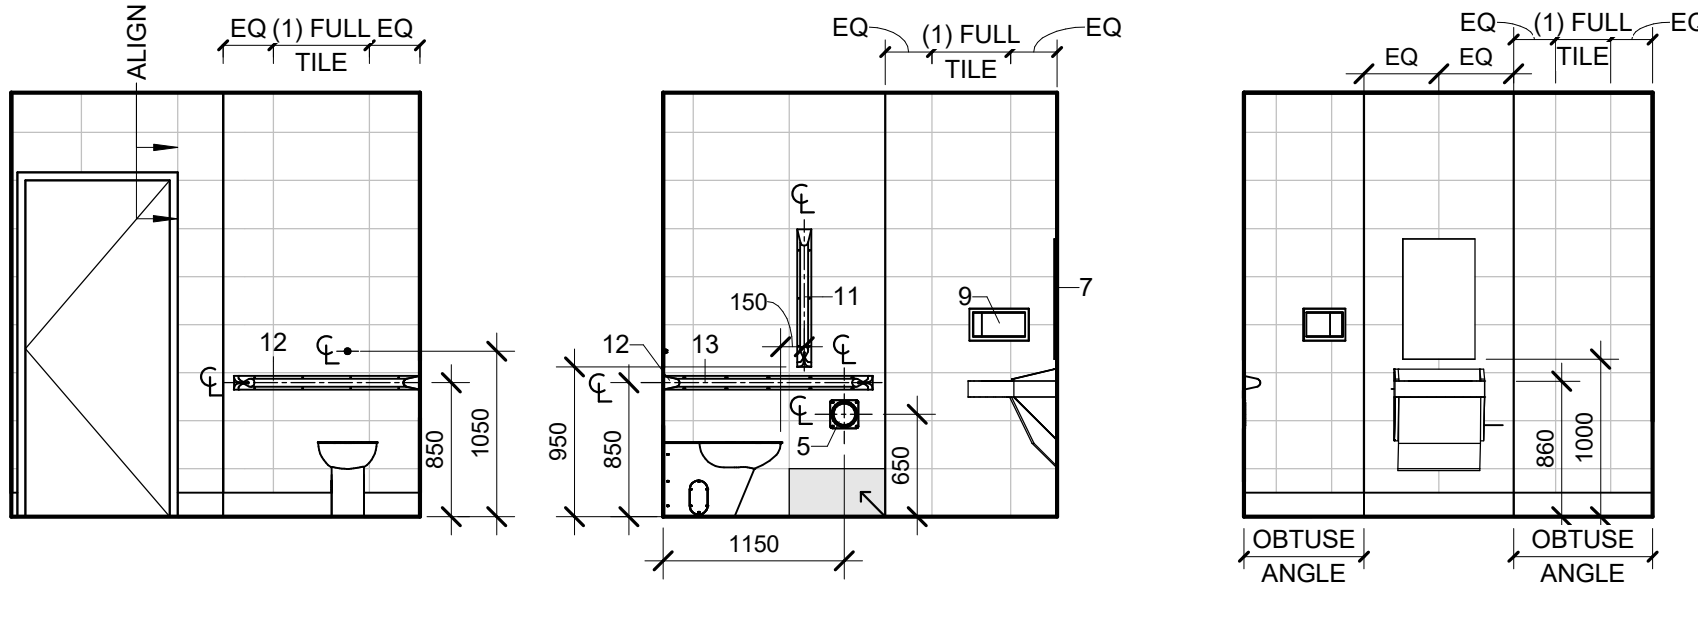

6 PATIENT WASHROOM - 3203 & 3208 1 : 48



6 PATIENT WASHROOM - 3203 & 3208 1 : 48

KEY TO MATERIALS LEGEND

1. GWB SOFFIT
2. FILLER PANEL
3. PAPER TOWEL DISPENSER (N.I.C. - BY OWNER)
4. SOAP DISPENSER (N.I.C. - BY OWNER)
5. TOILET PAPER HOLDER
6. COUNTER SUPPORT BRACKET
7. WALL MOUNTED LIGATURE RESISTANT FRAMED MIRROR
8. COAT HOOK @ 48" AFF
9. RECESSED STAINLESS STEEL SHELF
10. 24" GRAB BAR - VERTICAL
11. 24" GRAB BAR - HORIZONTAL
12. 36" GRAB BAR - HORIZONTAL
13. 42" GRAB BAR - HORIZONTAL
14. MOP & BROOM HOLDER
15. SOLID SURFACE COUNTERTOP, INTEGRAL BACKSPLASH & INTEGRAL SINK (SINK TYPE 1)
16. SOLID SURFACE COUNTERTOP, INTEGRAL BACKSPLASH & SINK
17. SOLID SURFACE COUNTERTOP
18. SOLID SURFACE COUNTERTOP & INTEGRAL BACKSPLASH
19. SOLID SURFACE RETURNS FROM TOP COUNTER TO LOWER COUNTER
20. 1" RADIUS CORNER
21. SHOWER CURTAIN TRACK
24. FINISHED END
25. REMOVABLE PANEL W/ FASTENERS

SYMBOLS

- E ■ ELECTRICAL RECEPTACLE (2)
- E ■ ELECTRICAL RECEPTACLE (4)
- TH □ TELEPHONE OUTLET
- P □ WALL MOUNTED PHONE
- D □ DATA OUTLET
- EC ■ CABLE/ELECTRICAL OUTLET
- SW ■ LIGHT SWITCH
- NCB □ NURSE CALL CODE BLUE
- A □ MEDICAL GAS-AIR
- O □ MEDICAL GAS-OXYGEN
- V □ VACUUM
- SL □ VACUUM SLIDE
- FS □ FIRE STROBE
- TH □ THERMOSTAT
- PS □ PANIC SWITCH
- PR □ PANIC RECEIVER
- TS □ TEMPERATURE SENSOR

GENERAL NOTES

1. ALL DIMENSIONS ARE FINISH DIMENSIONS UNLESS OTHERWISE NOTED.
2. ALL DIMENSIONS FOR MILLWORK ARE TO BE FIELD MEASURED AND VERIFIED BEFORE FABRICATION OF MILLWORK UNITS BEGINS.
3. ALL COUNTERTOPS @ SINK LOCATIONS TO BE SOLID SURFACE UNLESS NOTED OTHERWISE.
4. ALL COUNTERTOPS ARE TO HAVE A 4" BACKSPLASH ON ALL SIDES WHERE THE COUNTERTOPS ABUT FINISHED WALLS UNLESS OTHERWISE NOTED.
5. ALL MILLWORK UNITS THAT ABUT FINISH WALLS ARE TO HAVE 1" MINIMUM PLASTIC LAMINATE FINISHED FILLERS AT WALLS. FILLERS ARE TO BE SCRIBED TO THE WALLS.
6. ALL CABINETS AND DRAWERS SHALL BE LOCKABLE.
7. ALL BASES TO BE 4" HIGH RESILIENT BASE UNLESS OTHERWISE NOTED. REFER TO THE ROOM FINISH FOR ALL FINISHES.
8. ALL SOAP DISPENSERS AND PAPER TOWEL DISPENSERS SHOWN ARE TO BE FURNISHED BY THE OWNER AND INSTALLED BY THE CONTRACTOR.
9. WHERE OUTLETS AND/OR RECEPTACLES ARE CALLED OUT BELOW COUNTERTOPS, 2" DIAMETER SLOTS IN THE COUNTERTOP SHALL BE PROVIDED IN THE BACK OF THE COUNTERTOP FOR CORD ACCESS. FINISH ALL SLOTS WITH GROMMETS.
10. TYPICAL SWITCH AND RECEPTACLE LOCATIONS ARE INDICATED AT INTERIOR ELEVATIONS, BUT DO NOT REPRESENT TOTAL QUANTITIES OR INDIVIDUAL TYPES. AT THESE LOCATIONS ONLY, REFER TO MOUNTING HEIGHT REQUIREMENTS. SEE MECHANICAL AND ELECTRICAL DRAWINGS FOR COMPREHENSIVE FIXTURE AND/OR DEVICE QUANTITIES AND LOCATIONS.
11. ALL RECEPTACLES AND OUTLETS BELOW COUNTER HEIGHT ARE TO BE MOUNTED 18" AFF TO CENTERLINE OF DEVICE UNLESS OTHERWISE NOTED.
12. ALL RECEPTACLES AND OUTLETS ABOVE COUNTER HEIGHT ARE TO BE MOUNTED 6" ABOVE TOP OF COUNTER OR 6" ABOVE BACKSPLASH (WHERE OCCURS) TO CENTERLINE OF DEVICE UNLESS OTHERWISE NOTED.
13. PROVIDE 1" RADIUS CORNER AT ALL COUNTERS THAT DO NOT ABUT TO A PARTITION AND HAVE EXPOSED CORNERS.
14. AT ALL WATER FILTER LOCATIONS PROVIDE FILTER ASSEMBLY MOUNTED IN CABINET BELOW SINK.