

November 26, 2025

Client: G.M. Diemert Architect Inc.
957 4th Ave. E.,
Owen Sound, ON N4K 2N9

RE: Town of South Bruce Peninsula Town Hall
Wiarton, ON

Job #: 24099

Attn: Grant Diemert, OAA/Bryce Jaekel

ADDENDUM 04

MECHANICAL

Item 1

- 1.0 Reference Attached Reissued Drawings M102 and M401
 - .1 Revise showers types in public WRs 056 and 057, as shown on attached reissued drawings M102 and M401.

ELECTRICAL

Item 1

- 1.0 Reference Drawing E301
 - .1 In Shower 056a, 056b, 057a, and 057b center the type 'L5A' light fixtures to be located between the entry door and the shower. Provide connections to shower lights (on same circuit/switch as the ceiling light). Shower lights provided by shower enclosure supplier).



Kevin Fox, C.Tech.



Electrical Designer

24099 Addendum 04 (M&E-Showers)(var. reissued dwgs) Nov 26 25
hb/kk



PLUMBING FIXTURE SCHEDULE													CAPACITY INDICATED ON SCHEDULE REFER TO SPECIFICATION FOR CONSTRUCTION STANDARDS, ACCESSORIES AND ADDITIONAL INFORMATION.		
Item	Type	Connection Sizes					Acceptable Manufacturer	Fixture		Acceptable Manufacturer	Trim		Acceptable Manufacturer	Accessories	
		HW	CP	TW	Drnh	Vent		Fixture Description	Trim Description		Accessory Description				
SH-1	SHOWER	1/2	1/2		2		MIROLIN MADISON SH43LS/RS	ACRILIC, INTEGRAL TUB/SHOWER SURROUND C/W STAINLESS STEEL GRAB BARS AND SEAT, CHROME DRAIN, PATTERNED BOTTOM. REINFORCED SHOWER CURTAIN ROD, RODS TO MATCH SHOWER FIXTURE FINISH. FLUP - SIZE 1270mm x 876mm x 2146mm (50" x 34.5" x 84.5")	DELTA 8611T68 MOEN SYMONS	PUSH-BUTTON ELECTRONIC SHOWER SYSTEM W/ ADJUSTABLE SHOWER TIMER, VANDAL RESISTANCE CAST FLOW CONTROL WALL MOUNTED SHOWERHEAD. PROVIDE ACCESSORIES TO LIMIT MAXIMUM FLOW RATE TO 7.6 LITRES (2.0 GPM)/MINUTE AT 550 KPA (80 PSI).		PROVIDE RECESSED MOUNT BOX, THERMOSTATIC AND PRESSURE BALANCE MIXING VALVES.			
SH-2	BARRIER FREE SHOWER	1/2	1/2		2		MIROLIN ACCESS 66 AROS66LR	BARRIER FREE ACRILIC, SAFETY TEXTURED BOTTOM, INTEGRAL TUB/SHOWER SURROUND C/W STAINLESS STEEL GRAB BARS AND FOLD -UP SEAT. ADDITIONAL GRAB BARS AND FOLD-UP SEAT ADDITIONAL GRAB BARS REQUIRED AT BOTH SIDES OF ENTRANCE AND "Y" SHAPE GRAB BAR ON BACK WALL OF SHOWER. REINFORCED SHOWER CURTAIN ROD, GRAB BARS, RODS TO MATCH SHOWER FIXTURE FINISH. FLUP DOWN SEAT TO BE MODEL DN7110, SIZE 1676mm x 1466mm x 2235mm (66" x 37 1/4" x 88")	DELTA 117H335-25 MOEN 52326B17, 78350 & 52326B28 SYMONS S-86-1 C/W T-400B-36-V	BARRIER FREE CHROME PLATED BRASS COMBINATION SHOWER FITTING WITH VOLUME CONTROL, PRESSURE BALANCING MIXING VALVE, SCREWDRIVER STOPS, CHROME PLATED BALL JOINT FULLY ADJUSTABLE SPRAY PATTERN SHOWER HEAD WITH BENT SHOWER ARM AND ESCUTCHEON TELEPHONE SHOWER WITH FLEXIBLE HOSE, MOUNTING BRACKET AND ESCUTCHEON. PROVIDE ACCESSORIES TO LIMIT MAXIMUM FLOW RATE TO 7.6 LITRES (2.0 GPM)/MINUTE AT 550 KPA (80 PSI).		INSULATION: INSULATE WASTE AND SUPPLIES WITH UL LISTED PREFORMED INSULATION SYSTEM COMPLETE WITH SEAMLESS JACKET.			
DS-1	BARRIER FREE STAINLESS STEEL DOUBLE SINK	1/2	1/2		1 1/2	1 1/4	KINDRED LB8640R-1/3 NOVANNI 20071	SINK: DOUBLE COMPARTMENT, LEDGE-BACK, FROM 1.0 mm (20 GAUGE) THICK TYPE 302 POLISHED STAINLESS STEEL, SELF-RIMMING, UNDERCOATED, CLAMPS. OVERALL SIZES: 790 mm X 520 mm X 200 mm (31 1/2" X 20 3/4" X 8").	DELTA 100 ZURN Z82300-CP8 MOEN COMMERCIAL 8701	FAUCET: CHROME PLATED BRASS, WITH SWING SPOUT, AERATOR, SINGLE LEVER HANDLE, WASHERLESS CONTROLS, ACCESSORIES TO LIMIT MAXIMUM FLOW RATE TO 8.35 l/min (2.2 gpm) AT 413 kPa (60 psi).		INSULATION: INSULATE WASTE AND SUPPLIES WITH UL LISTED PREFORMED INSULATION SYSTEM COMPLETE WITH SEAMLESS JACKET. WASTE FITTING: INTEGRAL STAINLESS STEEL BASKET STRAINER/STOPPER, TAILPIECE, CAST BRASS P-TRAP WITH CLEANOUT.			
FD-1	FLOOR DRAIN				NOTED	1 1/2	ZURN ZN415B MFB F1100-C CONTOUR C2000-R6 WATTS FD-100-C-A	GENERAL DUTY CAST IRON BODY, ADJUSTABLE HEAD, NICKEL BRONZE STRAINER, INTEGRAL SEPAGE PAN, AND CLAMPING COLLAR. USE SQUARE STRAINER IN TILED AREAS AND ROUND STRAINER ELSEWHERE. C/W TRAP PRIMER							
HD-1	HUB DRAIN				NOTED	1 1/2	ZURN Z415 C/W Z-400-S MFB F1100-C-DD CONTOUR C2000-F WATTS FD-100-C-DD	GENERAL DUTY HUB DRAIN CAST IRON BODY, CLAMPING COLLAR, NICKEL-BRONZE ADJUSTABLE HEAD HUB. C/W TRAP PRIMER.							
L-1	B.F. COUNTER MOUNTED LAV ELECTRONIC FAUCET	1/2	1/2		1.25	1 1/4	AMERICAN STANDARD COUNTRY 3348 403 KOHLER PENNINGTON K-2196	VITREOUS CHINA SINK, SELF-RIMMING, WITH FRONT OVERFLOW, SOAP DISPENSERS, GASKET, SWIVEL CLAMPS, SEAM-O-RAL, SUPPLY OPENINGS ON 100 MM (4") CENTRES. SIZES: 521 MM X 440 MM (20 1/2" X 17 5/8") OUTSIDE.	DELTA 5910230 MOEN COMMERCIAL 8301-AC	HARDWIRED ELECTRONIC FAUCET, CAST BRASS ONE PIECE BODY WITH INTEGRAL WATER PROOF INFRA-RED SENSOR AND CONNECTOR, ADJUSTABLE SENSING RANGE 76mm TO 381mm (3" TO 15") AND TIME OUT 15 TO 75 SECONDS CHROME FINISH, VANDAL RESISTANT AERATOR HAVING INTEGRAL FLOW CONTROL FOR 1.5gpm (5.7 L/MIN) @ 413 KPA (60 PSI) MAX UNDER COUNTER PLASTIC SURFACE MOUNTED HOUSING FOR SOLENOID AND CONTROLLER. SENSOR ACTIVATES IN PRESENCE OF PERSON'S HANDS IN LAVATORY. C/W PLUG-IN TRANSFORMER.	INSULATION: INSULATE WASTE AND SUPPLIES WITH UL LISTED PREFORMED INSULATION SYSTEM COMPLETE WITH SEAMLESS JACKET. WASTE FITTING: NPS 32 MM (1 1/4") OFFSET WASTE WITH OPEN GRID STRAINER. THERMOSTATIC MIXING VALVE UNDER LAV. DELTA R3070-MIXL*, POWERS LM490 OR EQUAL.				
L-2	B.F. WALL MOUNTED LAV ELECTRONIC FAUCET	1/2	1/2		1 1/4	1 1/4	AMERICAN STANDARD LUCRINE 355.012 KOHLER BRENHAM K-1997	WALL-HUNG SINK, VITREOUS CHINA, WITH SPLASH LIP, SUPPLY OPENINGS ON 100 mm (4") CENTRES, OVERFLOW. SIZE: 557 MM X 502 MM (21 15/16" X 19 3/4").	DELTA 5910220 MOEN COMMERCIAL CA301-AC ZURN Z8915-HWG-XL	HARDWIRED ELECTRONIC FAUCET, CAST BRASS ONE PIECE BODY WITH INTEGRAL WATER PROOF INFRA-RED SENSOR AND CONNECTOR, ADJUSTABLE SENSING RANGE 76mm TO 381mm (3" TO 15") AND TIME OUT 15 TO 75 SECONDS CHROME FINISH, VANDAL RESISTANT AERATOR HAVING INTEGRAL FLOW CONTROL FOR 1.5gpm (5.7 L/MIN) @ 413 KPA (60 PSI) MAX UNDER COUNTER PLASTIC SURFACE MOUNTED HOUSING FOR SOLENOID AND CONTROLLER. SENSOR ACTIVATES IN PRESENCE OF PERSON'S HANDS IN LAVATORY. C/W PLUG-IN TRANSFORMER.	INSULATION: INSULATE WASTE AND SUPPLIES WITH UL LISTED PREFORMED INSULATION SYSTEM COMPLETE WITH SEAMLESS JACKET. WASTE FITTING: NPS 32 MM (1 1/4") OFFSET WASTE WITH OPEN GRID STRAINER. PROVIDE FLOOR MOUNTED WALL CARRIER THERMOSTATIC MIXING VALVE UNDER LAV. DELTA R3070-MIXL*, POWERS LM490 OR EQUAL.				
MS-1	MOP SINK	1/2	1/2		3	1 1/2	FIAT MSB 2424 ZURN 1986-24 STERN WILLIAMS MBS-2424	SINK: MOLDED HIGH DENSITY COMPOSITE BASIN WITH 80 mm (3") CHROME PLATED CAST BRASS DOME STRAINER AND GASKETED OUTLET CONNECTION. OVERALL SIZE: 600 mm X 600 mm X 250 mm HIGH (24" X 24" X 10").	FIAT 830-4A ZURN ZM40M-1-SH DELTA 2819	WALL MOUNTED FAUCET: CHROME PLATED CAST BRASS WALL MOUNTED FAUCET WITH WALL BRACE, 20 mm (3/4") THREADED OUTLET SPOUT WITH RAIL HOOK, 200 mm (8") CENTRESET LEVER HANDLES, VACUUM BREAKER, ESCUTCHEONS, UNION INLETS, AERATOR, & INTEGRAL STOP VALVES. PROVIDE ACCESSORIES TO LIMIT MAXIMUM FLOW RATE TO 8.35 l/min (2.2 gpm) AT 413 KPA (60 psi).	HOSE AND HOSE BRACKET: 1200 mm (48") LONG RUBBER HOSE MOP HANGER WALL GUARD: STAINLESS STEEL 600 mm (24") HIGH CONTINUOUS ON ADJACENT WALLS.				
RD-1	ROOF DRAIN				NOTED		ZURN ZA121-CR MFB F1120-BU CONTOUR C1000CAMP WATTS RD-100-BED-K SMITH 1015-C-R-AD	STANDARD ROOF DRAIN WITH CAST IRON BODY WITH ALUMINUM DOME, UNDER-DECK CLAMP TO SUIT ROOF CONSTRUCTION, ROOF RUMP RECEIVER, FLASHING CLAMP RING WITH INTEGRAL GRAVEL STOP.							
S-1	STAINLESS STEEL SINGLE SINK	1/2	1/2		1.5	1 1/4	KINDRED LB6808B-1/3 NOVANNI 1017	SINK: SINGLE COMPARTMENT, LEDGE-BACK, FROM 1.0 mm (20 GAUGE) THICK TYPE 302 POLISHED STAINLESS STEEL, SELF-RIMMING, UNDERCOATED, CLAMPS. OVERALL SIZES: 520 mm X 510 mm X 200 mm (20 1/2" X 20" X 8").	DELTA 100 ZURN Z82300-CP8 MOEN COMMERCIAL 8701	FAUCET: CHROME PLATED BRASS, WITH SWING SPOUT, AERATOR, SINGLE LEVER HANDLE, WASHERLESS CONTROLS, ACCESSORIES TO LIMIT MAXIMUM FLOW RATE TO 8.35 l/min (2.2 gpm) AT 413 kPa (60 psi).		WASTE FITTING: INTEGRAL STAINLESS STEEL BASKET STRAINER/STOPPER, TAILPIECE, CAST BRASS P-TRAP WITH CLEANOUT.			
S-2	STAINLESS STEEL SINGLE SINK	1/2	1/2		1.5	1 1/4	KINDRED LB6808B-1/3 NOVANNI 1017	SINK: SINGLE COMPARTMENT, LEDGE-BACK, FROM 1.0 mm (20 GAUGE) THICK TYPE 302 POLISHED STAINLESS STEEL, SELF-RIMMING, UNDERCOATED, CLAMPS. OVERALL SIZES: 520 mm X 510 mm X 200 mm (20 1/2" X 20" X 8").	DELTA 100 ZURN Z82300-CP8 MOEN COMMERCIAL 8701	FAUCET: CHROME PLATED BRASS, WITH SWING SPOUT, AERATOR, SINGLE LEVER HANDLE, WASHERLESS CONTROLS, ACCESSORIES TO LIMIT MAXIMUM FLOW RATE TO 8.35 l/min (2.2 gpm) AT 413 kPa (60 psi).		WASTE FITTING: INTEGRAL STAINLESS STEEL BASKET STRAINER/STOPPER, TAILPIECE, CAST BRASS P-TRAP WITH CLEANOUT.			
S-3	STAINLESS STEEL SINGLE SINK	1/2	1/2		1.5	1 1/4	KINDRED LB6808B-1/3 NOVANNI 1017	SINK: SINGLE COMPARTMENT, LEDGE-BACK, FROM 1.0 mm (20 GAUGE) THICK TYPE 302 POLISHED STAINLESS STEEL, SELF-RIMMING, UNDERCOATED, CLAMPS. OVERALL SIZES: 520 mm X 510 mm X 200 mm (20 1/2" X 20" X 8").	DELTA 100 ZURN Z82300-CP8 MOEN COMMERCIAL 8701	FAUCET: CHROME PLATED BRASS, WITH SWING SPOUT, AERATOR, SINGLE LEVER HANDLE, WASHERLESS CONTROLS, ACCESSORIES TO LIMIT MAXIMUM FLOW RATE TO 8.35 l/min (2.2 gpm) AT 413 kPa (60 psi).		WASTE FITTING: INTEGRAL STAINLESS STEEL BASKET STRAINER/STOPPER, TAILPIECE, CAST BRASS P-TRAP WITH CLEANOUT.			
S-4	STAINLESS STEEL SINGLE SINK	1/2	1/2		1.5	1 1/4	KINDRED QSA1816-8 NOVANNI	SINK: SINGLE COMPARTMENT, LEDGE-BACK, FROM 1.0 mm (20 GAUGE) THICK TYPE 302 POLISHED STAINLESS STEEL, SELF-RIMMING, UNDERCOATED, CLAMPS. OVERALL SIZES: 460 mm X 410 mm X 200 mm (18 1/8" X 16 1/8" X 8").	DELTA 100 ZURN Z82300-CP8 MOEN COMMERCIAL 8701	FAUCET: CHROME PLATED BRASS, WITH SWING SPOUT, AERATOR, SINGLE LEVER HANDLE, WASHERLESS CONTROLS, ACCESSORIES TO LIMIT MAXIMUM FLOW RATE TO 8.35 l/min (2.2 gpm) AT 413 kPa (60 psi).		WASTE FITTING: INTEGRAL STAINLESS STEEL BASKET STRAINER/STOPPER, TAILPIECE, CAST BRASS P-TRAP WITH CLEANOUT.			
U-1	URINAL FLUSH VALVE, HANDS FREE		3/4		2	1 1/2	AMERICAN STANDARD WASHBROOK 6590.005 KOHLER BARDON K-4904-ET ZURN Z5750	VITREOUS CHINA, WASHOUT TYPE, INTEGRAL FLUSHING RIM, EXTENDED SHELDS, INTEGRAL TRAP, BACK OUTLET, WALL-MOUNTED, TOP SUPPLY SPUD, MIN 2" TRAP WAY, MAXIMUM 1.9 litres (0.5 gal) PER FLUSH. C/W FLOOR MOUNTED CARRIER	DELTA 817231-WMHSW ZURN ZEM56003AV-EWS SLOAN 186 ES-S-0-S	POLISHED CHROME PLATED VANDAL RESISTANT METAL COVER WITH HARDWIRED WALLMOUNTED SENSOR, RIGHT OR LEFT-HAND SUPPLY INSTALLATION, AUTOMATIC OPERATION HARDWIRED POWERED SENSOR, INFRARED SENSOR TO HAVE A RANGE ADJUSTMENT OF 305mm - 711MM (12" - 28") AND ELECTRONIC MANUAL OVERRIDE BUTTON. FLUSH CYCLE SET @ 1 LITRE (0.50 GAL.)					
WC-1	WATER CLOSET FLUSH TANK		1/2		3		AMERICAN STANDARD CADET 2462 016.3481 016 KOHLER WELLWORTH K-3505 MANSFIELD QUANTUM 147-123	VITREOUS CHINA, TANK WITH LINER & PRESSURE ASSISTED, SIPHON JET, ELONGATED RIM, METAL CHROME TRIP LEVER, TWO PIECE (TANK & BOWL) CLOSE COUPLED, BOLT CAP, BOTTOM OUTLET, FLOOR-MOUNTED, 12" ROUGH-IN, MIN 2" TRAP WAY, MAXIMUM 6 litres (1.6 gal) PER FLUSH.			SEAT: BEMIS 2155SSCT CENTOCO AM500STSCSS	SEAT: WHITE, ELONGATED, OPEN FRONT WITH COVER, MOLDED SOLID ANTIMICROBIAL PLASTIC, STAINLESS STEEL CHECK HINGES, STAINLESS STEEL OR SOLID BRASS INSERT POST.			
WC-2	BARRIER FREE WATER CLOSET FLUSH TANK, 16" HIGH		1/2		3	1 1/2	AMERICAN STANDARD CADET 2467 016.3483 016 KOHLER HIGHLINE K-3483 MANSFIELD QUANTUM 148-123	BARRIER FREE, 16" TALL TO RIM, VITREOUS CHINA, TANK WITH LINER & PRESSURE ASSISTED, SIPHON JET, ELONGATED RIM, METAL TRIP LEVER TWO PIECE (TANK & BOWL) CLOSE COUPLED, BOLT CAP, BOTTOM OUTLET, FLOOR-MOUNTED, 12" ROUGH-IN, MIN 2" TRAP WAY, MAXIMUM 6 litres (1.6 gal) PER FLUSH. SPECIAL ORDER LEFT/RIGHT HANDED SO THAT HANDLE IS ON TRANSFER SIDE OF FUTURE.			SEAT: BEMIS 7850TDO CENTOCO AM820ST5	SEAT: WHITE, ELONGATED, OPEN FRONT WITH COVER, MOLDED SOLID ANTIMICROBIAL PLASTIC, STAINLESS STEEL CHECK HINGES, STAINLESS STEEL OR SOLID BRASS INSERT POST.			
WC-3	BARRIER FREE WATER CLOSET FLUSH TANK, 16" HIGH		1/2		3	1 1/2	AMERICAN STANDARD CADET 2467 016.3483 016 KOHLER HIGHLINE K-3483 MANSFIELD QUANTUM 148-123	BARRIER FREE, 16" TALL TO RIM, VITREOUS CHINA, TANK WITH LINER & PRESSURE ASSISTED, SIPHON JET, ELONGATED RIM, METAL TRIP LEVER TWO PIECE (TANK & BOWL) CLOSE COUPLED, BOLT CAP, BOTTOM OUTLET, FLOOR-MOUNTED, 12" ROUGH-IN, MIN 2" TRAP WAY, MAXIMUM 6 litres (1.6 gal) PER FLUSH. SPECIAL ORDER LEFT/RIGHT HANDED SO THAT HANDLE IS ON TRANSFER SIDE OF FUTURE.			SEAT: BEMIS 7850TDO CENTOCO AM820ST5	SEAT: WHITE, ELONGATED, OPEN FRONT WITH COVER, MOLDED SOLID ANTIMICROBIAL PLASTIC, STAINLESS STEEL CHECK HINGES, STAINLESS STEEL OR SOLID BRASS INSERT POST.			
WC-4	WATER CLOSET FLUSH TANK		1/2		3	1 1/2	AMERICAN STANDARD CADET 2462 016.3481 016 KOHLER WELLWORTH K-3505 MANSFIELD QUANTUM 147-123	VITREOUS CHINA, TANK WITH LINER & PRESSURE ASSISTED, SIPHON JET, ELONGATED RIM, METAL CHROME TRIP LEVER, TWO PIECE (TANK & BOWL) CLOSE COUPLED, BOLT CAP, BOTTOM OUTLET, FLOOR-MOUNTED, 12" ROUGH-IN, MIN 2" TRAP WAY, MAXIMUM 6 litres (1.6 gal) PER FLUSH.			SEAT: BEMIS 2155SSCT CENTOCO AM500STSCSS	SEAT: WHITE, ELONGATED, OPEN FRONT WITH COVER, MOLDED SOLID ANTIMICROBIAL PLASTIC, STAINLESS STEEL CHECK HINGES, STAINLESS STEEL OR SOLID BRASS INSERT POST.			
HB-1	WALL HYDRANT		3/4				WATTS BD SERIES DELTA WALTIC WILKINS EMCO	20 MM (3/4") DIAMETER BRASS CONSTRUCTION, 200 PSI, 180°F PRESSURE AND TEMPERATURE LIMITS, COMPLETE WITH HOSE CONNECTION, AND WHEEL HANDLE. STRAIGHT/ANGLE PATTERN TO SUIT. PROVIDE VACUUM BREAKER COMPLETE WITH HOSE CONNECTION.							
NFHB-1	NON-FREEZE WALL HYDRANT		3/4				ZURN Z-1300 MFBH M4Y-20 ANCON HY-725	RECESSED, ENCASED, ALL BRONZE CONSTRUCTION, ANTI-SYPHON, NON FREEZE WALL HYDRANT WITH NON-TURNING OPERATING ROD, FREE FLOATING, COMPRESSION VALVE, INTEGRAL VACUUM BREAKER, SELF DRAINING, REPLACEABLE SEAT AND SEAT WASHER, NICKEL BRONZE BOX AND HINGED COVER WITH OPERATING KEY LOCK. NPS 20 MM (1") HOSE OUTLET.							
EW-1	EYE WASH	3/4	3/5		1 1/4	1 1/4	HAWS 7260BT-7270BT BRADLEY 519-220 GUARDIAN G1750P-TMV	250 MM (10") DIAMETER IMPACT RESISTANT BOWL, CHROME PLATED BRASS SPRAY HEADS COMPLETE WITH COVERS, AND WALL MOUNTING BRACKET. TEPID WATER MIXING VALVE MEETING REQUIREMENTS OF ANSI STANDARD Z358.1-2004. MIXING VALVE IS TO PROVIDE WATER TEMPERATURE BETWEEN 15.5°C (60°) AND 38°C (100°F). 15 MM (1/2") CHROME PLATED BRASS STAY OPEN BALL VALVE COMPLETE WITH PUSH HANDLE.			HAWS TWBS,EWE BRADLEY 519-2000 GUARDIAN G3600	TEMPERING VALVE TO BLEND HOT AND COLD WATER TO DELIVER TEPID WATER, AS REQUIRED BY ANSI Z358.1			

Revision History	
Revised By	Checked By
OWNER: Town of South Bruce Peninsula	
PROJECT: New Townhall Offices	
Drawing Number: 2404	
Project Number: M102	
ORIGINAL DRAWING	
SIZE ARCH E (1:20)	
A (1:10) and A (1:20)	

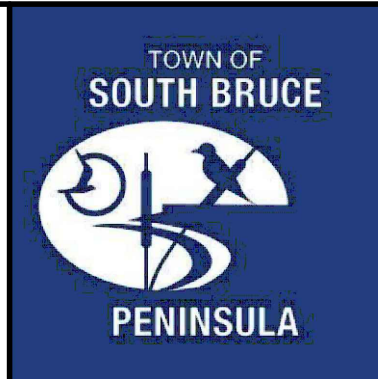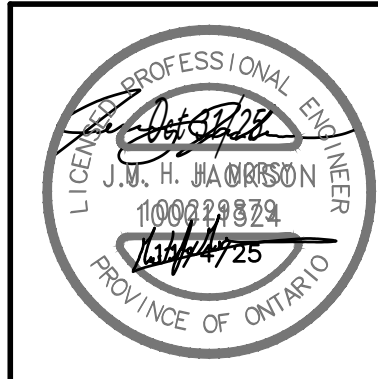

The contractor shall verify all dimensions and report all errors and discrepancies to the Consultant before commencement of the work.
The drawings show general arrangement of services. Failure to check on actual building construction will constitute service arrangement or the work.
The drawings are not intended as utility field notes, nor are they to be used for construction of the work.
Drawings and specifications, etc., prepared and issued by the Consultant are the property of the Consultant. They shall be returned to the Consultant at the completion of the project.
These documents are not to be duplicated or copied without the consent of the Consultant.
© 2020 DEI Consulting Engineers Inc.

G. M. DIEMERT ARCHITECT INC.
Suite 201
357 Fourth Avenue East
OWEN SOUND, ONTARIO, N4K 2N6
Tel: 519-378-1975

OWNER: **Town of South Bruce Peninsula**
315 George Street
Windsor, ON N9A 1P2

