






**AFTER HOURS**  
DIAGONAL HATCH REPRESENTS FLOORING & OTHER FINISHES REMOVAL AND REPLACEMENT - SEE DWGS AND SPECS - COORDINATE WITH TIMING OF HOARDING AND PHASES OF WORK. ENSURE SAFE CONDITIONS FOR DURATION OF ALL WORK

**AFTER HOURS**  
CONSTRUCT DUST PROOF HOARDING WALL. ALIGN TO ALLOW CORRIDOR LIGHTING TO BE MAINTAINED ON THE PUBLIC SIDE OR PROVIDE TEMPORARY LIGHTING TO MAINTAIN EXISTING LIGHT LEVELS.

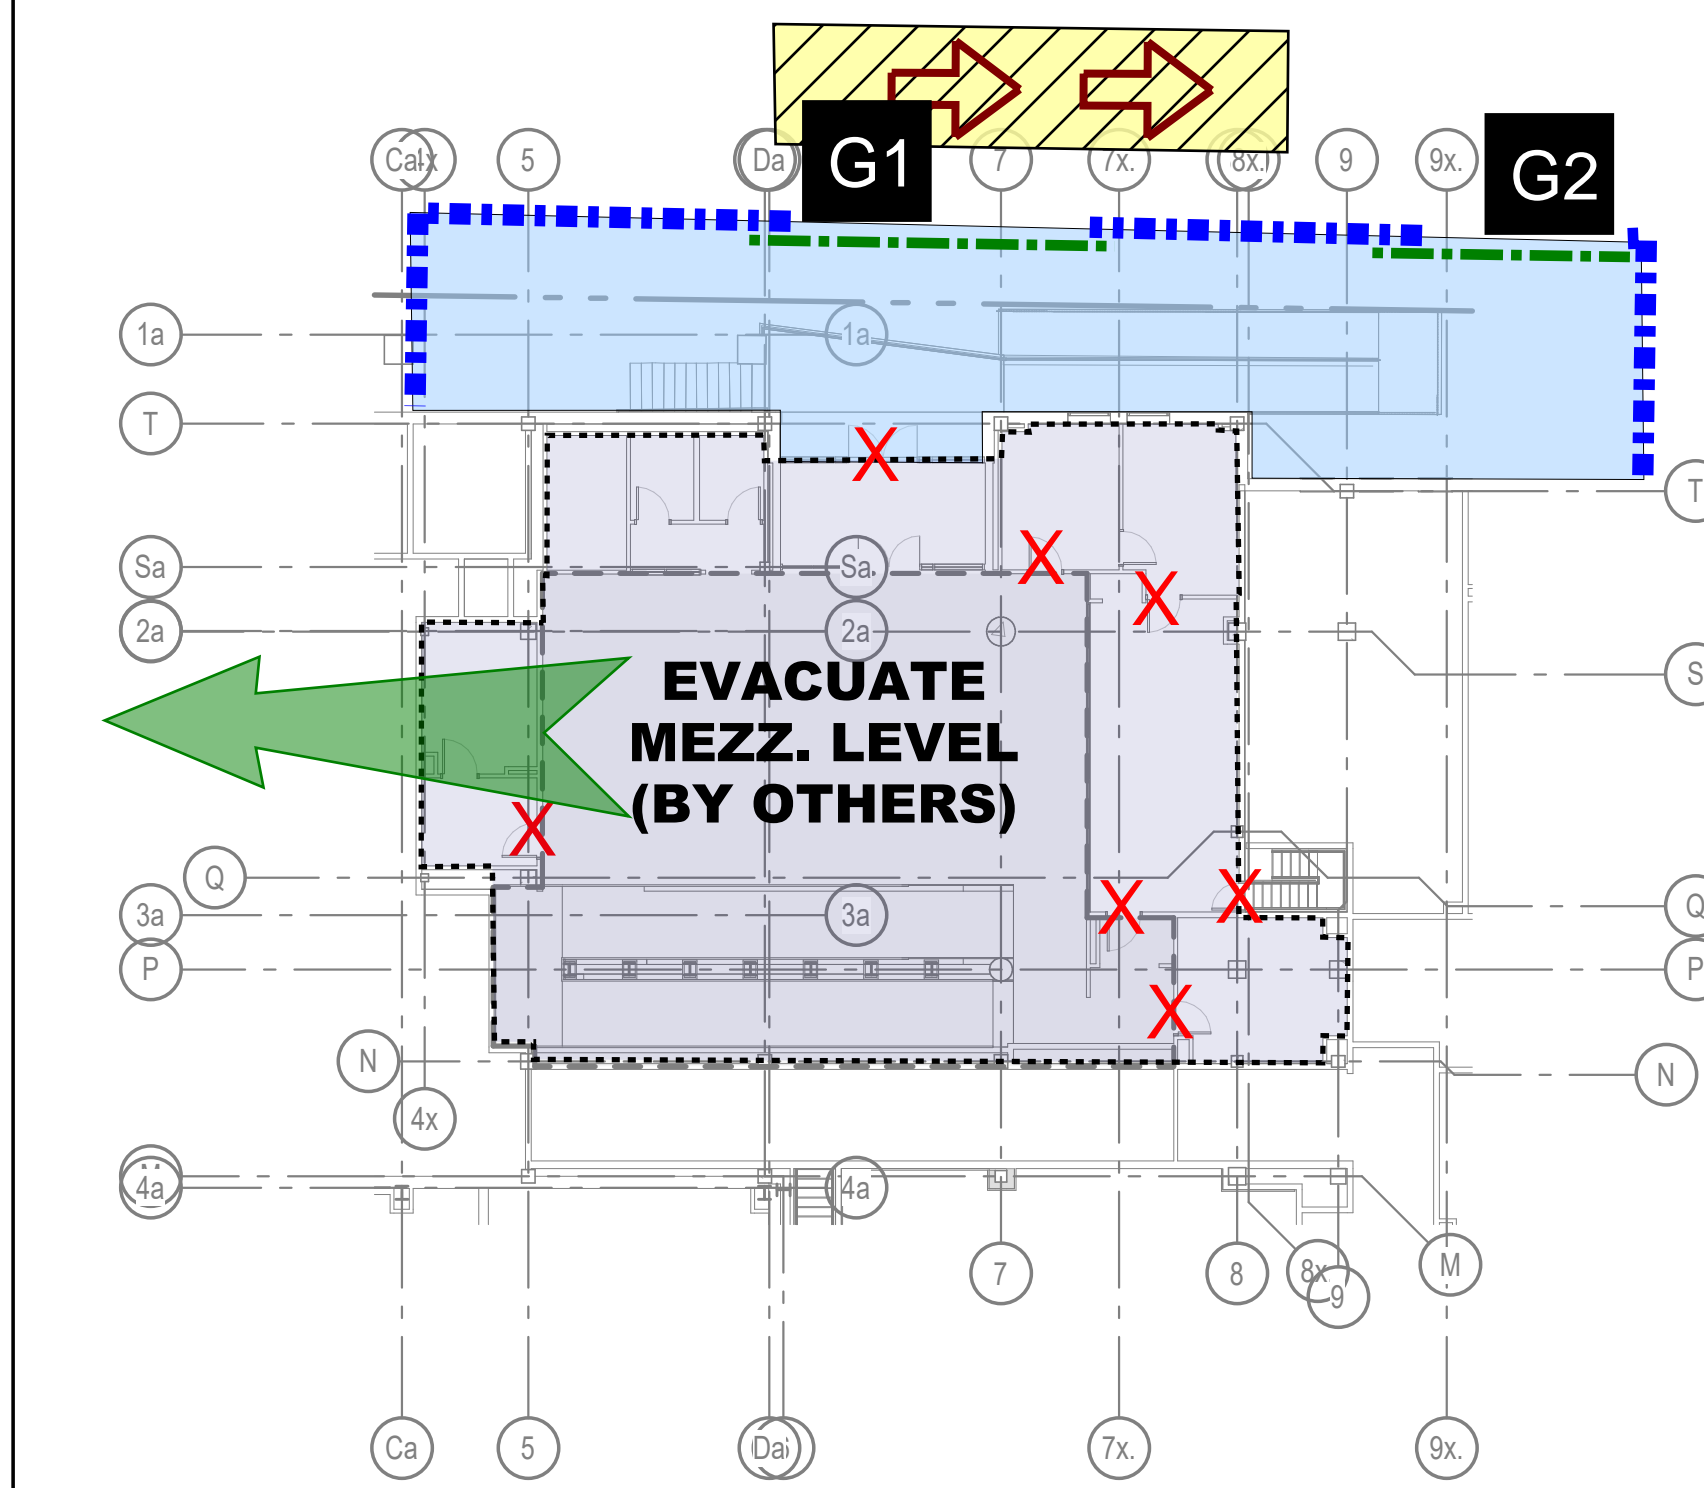


**PATIENT LOBBY - FLOOR PLAN**  
N.T.S.

CONSTRUCT PERMANENT WALL TO CLOSE ACCESS TO EXISTING STAIR - SEE CONSULT. DWGS.

TEMPORARY RECEPTION DESK BY OWNER (IF REQUIRED)

ACCESS/SECURITY TO BE MODIFIED BY OWNER THIS LOCATION TO ALLOW PUBLIC ENTRY DURING DEMO/CONSTRUCTION

**IMPORTANT NOTE:**  
EQUIPMENT IN EXISTING COMM CLOSET MUST REMAIN ACTIVE FOR DURATION OF CONSTRUCTION. PROTECT FROM DUST, DAMAGE AND OVER-HEATING FOR THE DURATION OF THE WORK AND SET-UP PROTOCOL FOR SAFE IT PERSONNEL ACCESS WHEN NEEDED. SEE DWGS FOR ADDITIONAL INFORMATION.

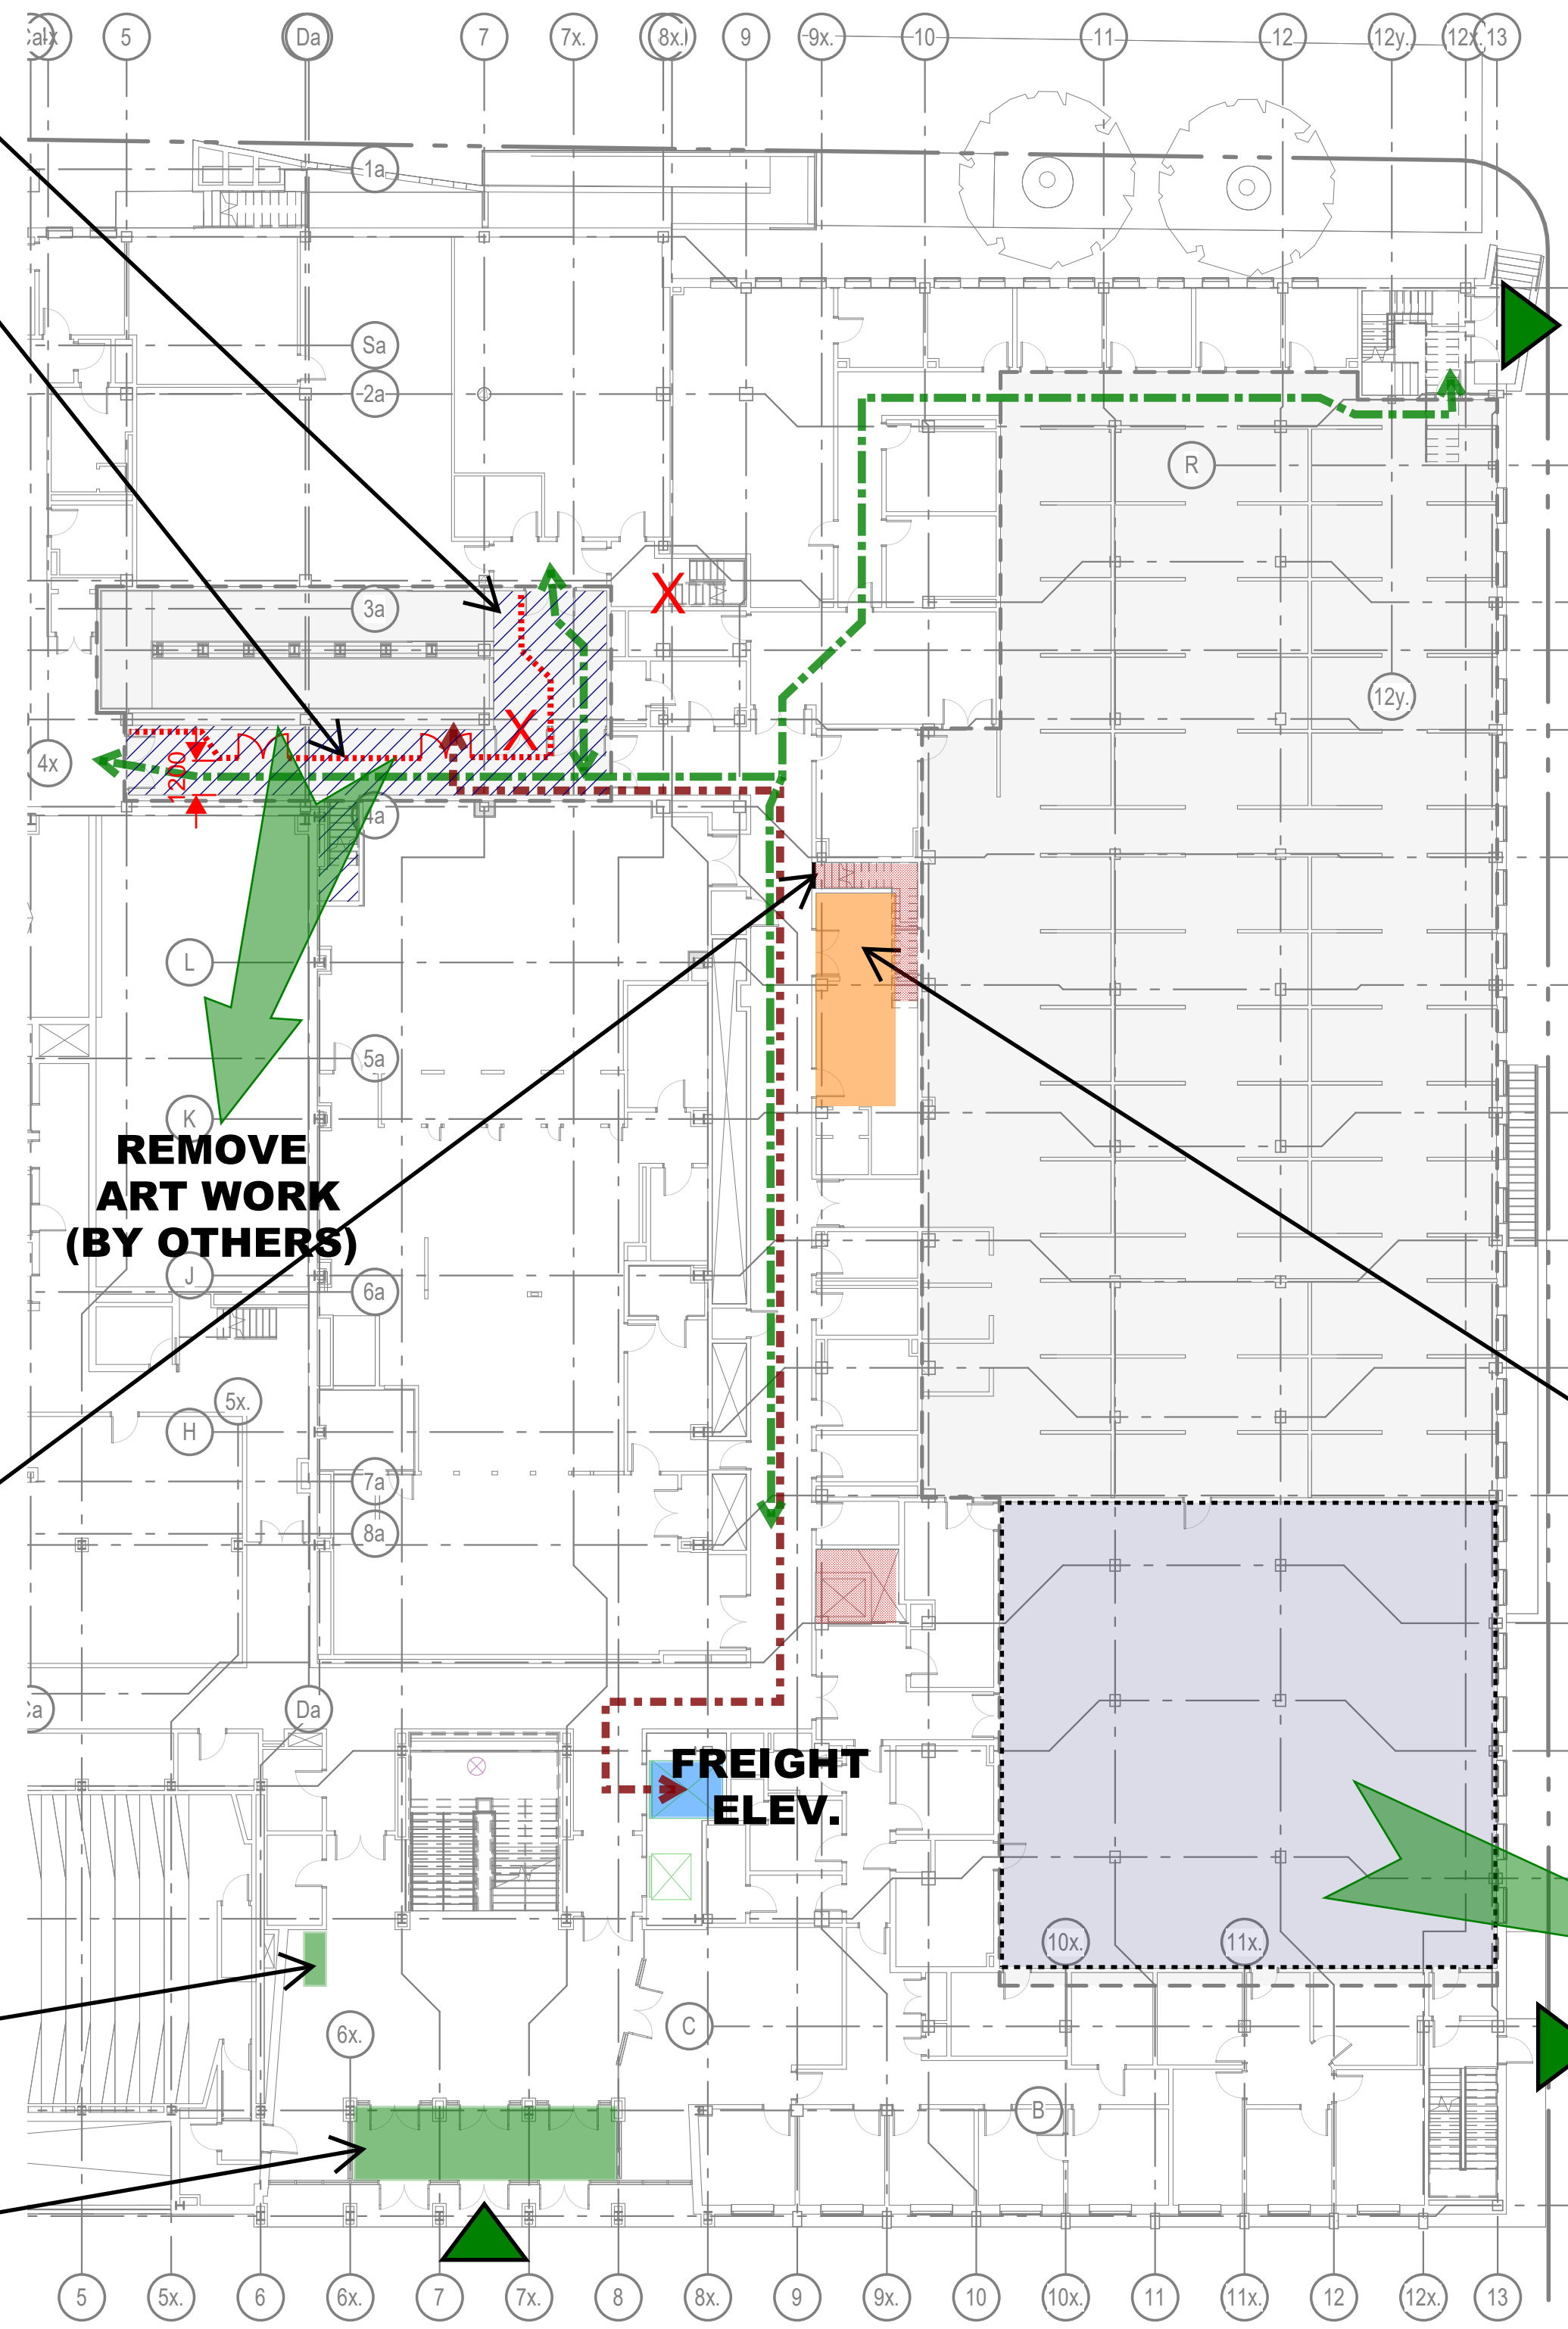

**LEVEL 1 - PARTIAL FLOOR PLAN**  
N.T.S.

**AFTER HOURS**  
REMOVE EXISTING DOUBLE DOOR AND SURROUNDING WALL. MAKE SAFE ALL EXPOSED FINISHES. PROVIDE LOCALIZED POLY DUST BARRIERS & PROTOCOL TO PREVENT DUST MIGRATION

**AFTER HOURS**  
PRIOR TO INSTALLATION OF HOARDINGS, MODIFY EXISTING DUCTWORK IN PREPARATION FOR NEW WORK AND TO ENSURE EXISTING HVAC SYSTEM REMAINS ACTIVE DURING ALL BUILDING OPERATING HOURS.

**KNOWN ASBESTOS ZONE**  
SEE DWGS, SPECS AND U OF T SCOPE

**AFTER HOURS**  
CONSTRUCT DUST PROOF HOARDING WALL IN PREPARATION FOR DEMOLITION IN NEXT PHASE. ALIGN TO ALLOW CORRIDOR LIGHTING TO BE MAINTAINED ON THE PUBLIC SIDE.

**AFTER HOURS**  
REMOVE EXISTING DOOR AND SURROUNDING WALL. MAKE SAFE ALL EXPOSED FINISHES. PROVIDE LOCALIZED POLY DUST BARRIERS & PROTOCOL TO PREVENT DUST MIGRATION

**AFTER HOURS**  
INSTALL PERMANENT WALL PER ARCH PLANS THIS LOCATION. COORDINATE REMOVAL OF FLOOR AND CEILING FINISHES AS NEEDED. PROVIDE LOCALIZED POLY DUST BARRIERS & PROTOCOL TO PREVENT DUST MIGRATION UNTIL PERMANENT WALL IS COMPLETE AND PROVIDES A DUST SEAL

**LEVEL 2 - PARTIAL FLOOR PLAN**  
N.T.S.

**EVACUATE MTG-ROOM (BY OTHERS)**


**IMPORTANT NOTE:**  
PRIOR TO CLOSING CLINIC 2 AREA FOR DEMOLITION CONSTRUCT NEW EXIT CORRIDOR PER THE DWGS

**AFTER NEW EXIT CORRIDOR IS CONSTRUCTED, INSTALL PERMANENT WALL THIS LOCATION - SEE DWGS.**

**AFTER HOURS**  
DIAGONAL HATCH REPRESENTS FLOORING & OTHER FINISHES REMOVAL AND REPLACEMENT - SEE DWGS AND SPECS - COORDINATE WITH TIMING OF HOARDING AND PHASES OF WORK. ENSURE SAFE CONDITIONS FOR DURATION OF ALL WORK

**EVACUATE CLINIC 2 AND PERIMETER SPACES (BY OTHERS)**

**EVACUATE OFFICES (BY OTHERS)**

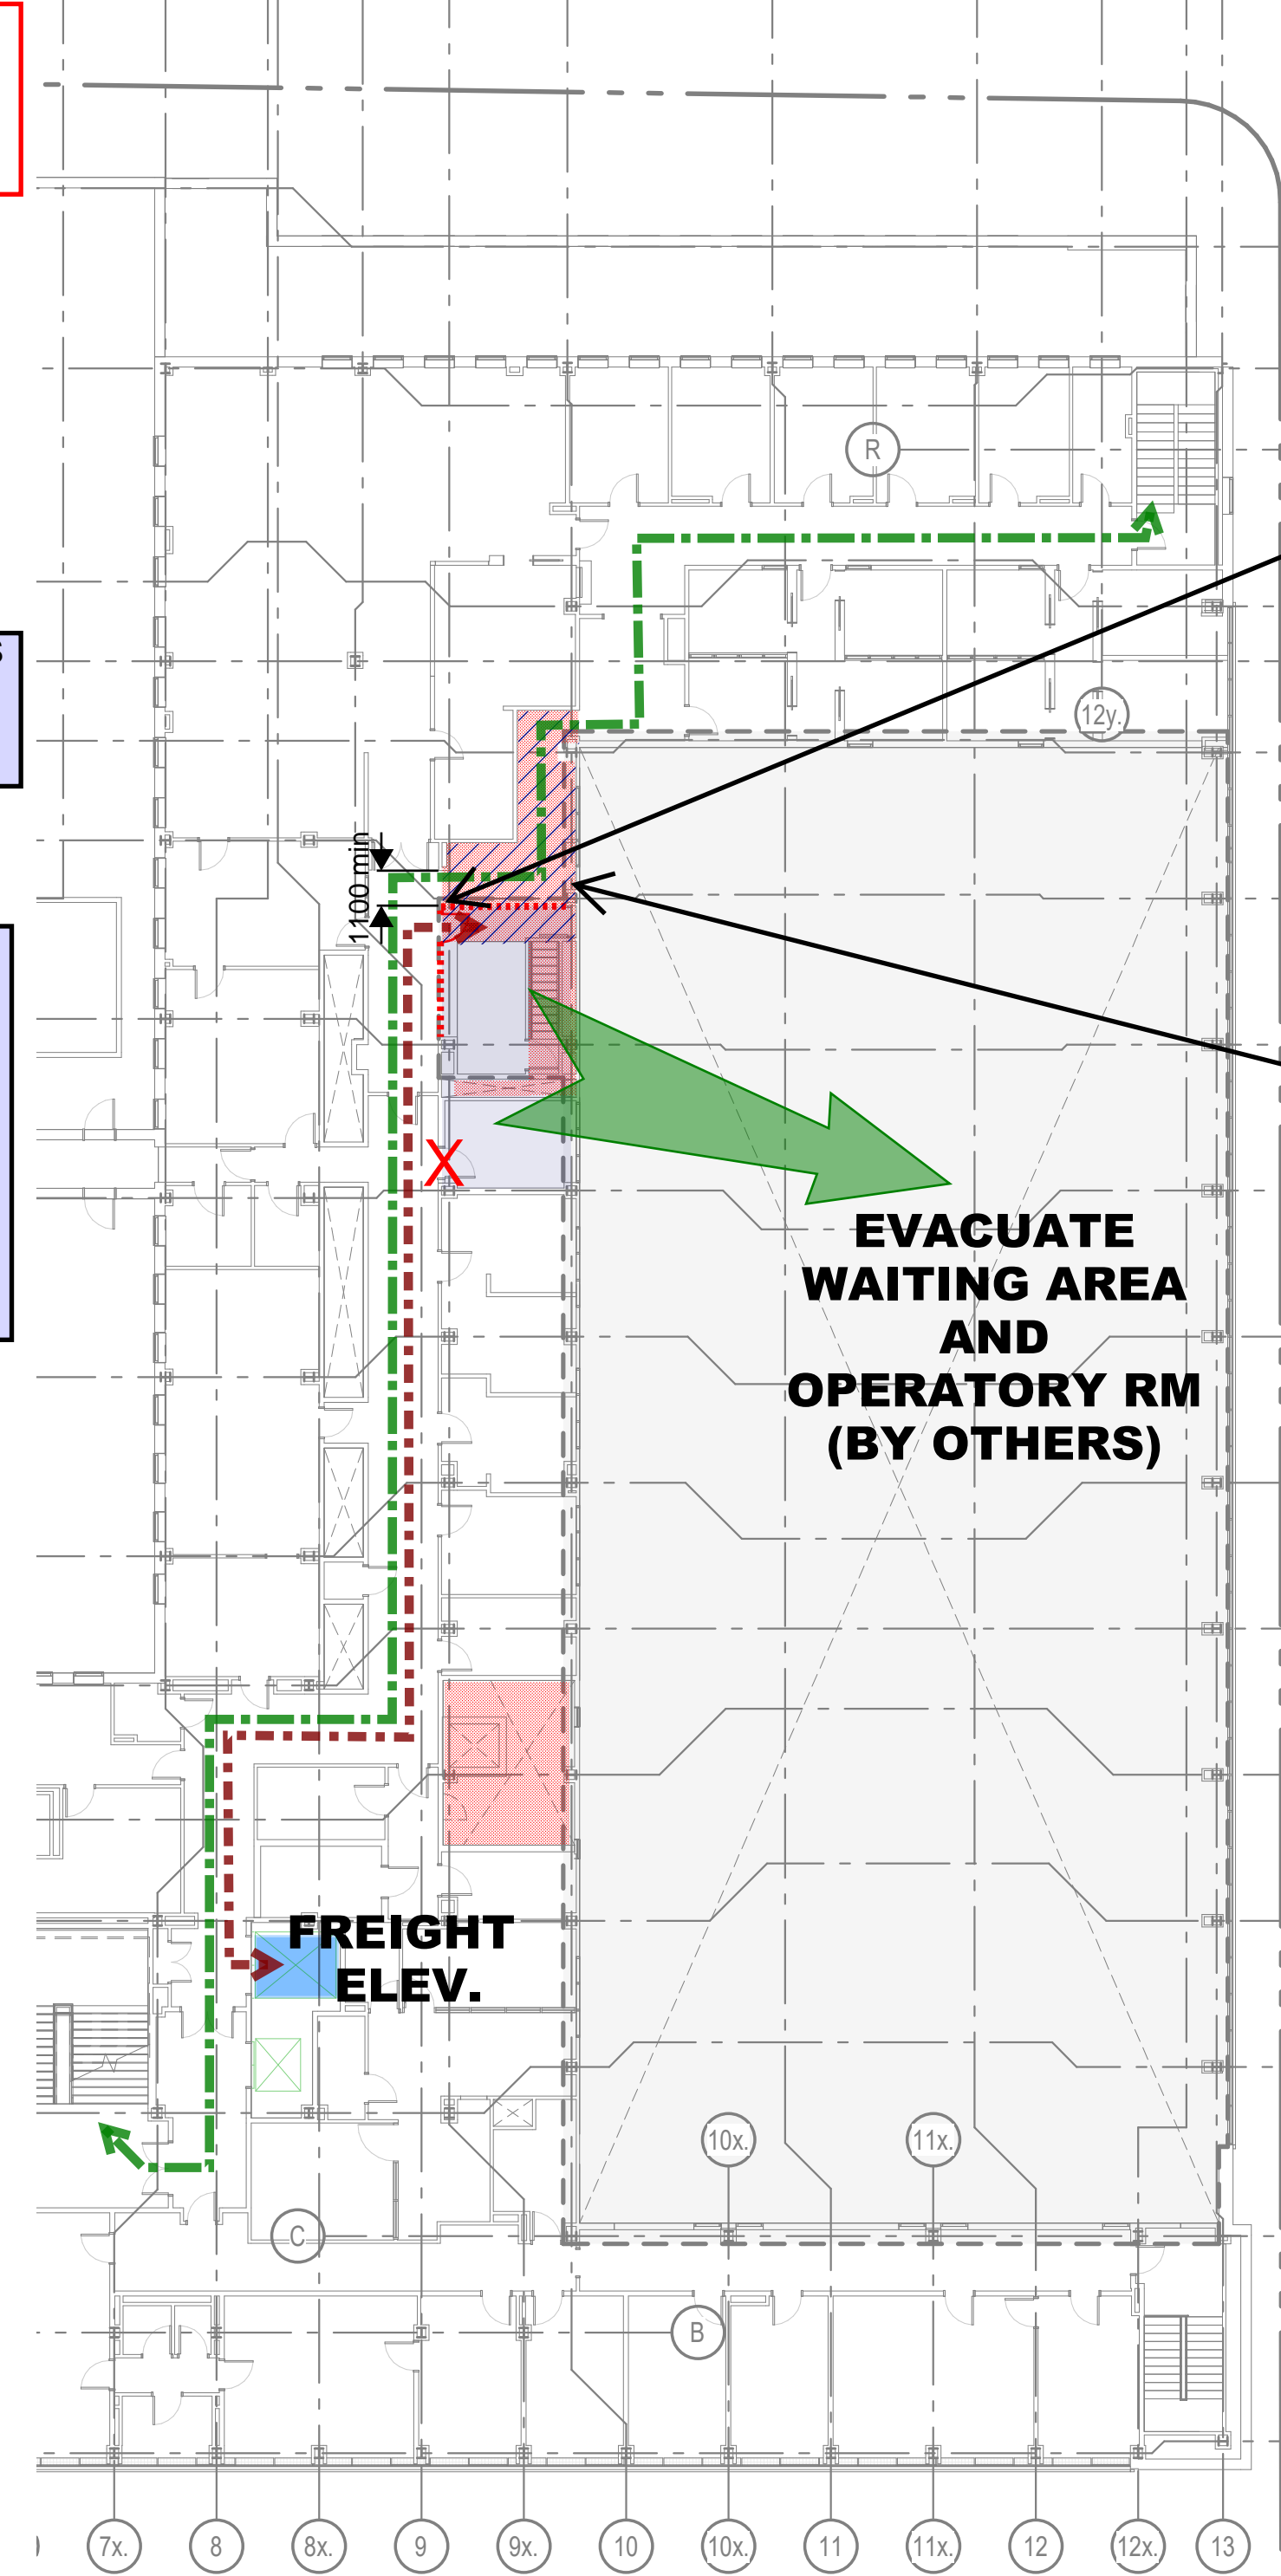


**LEVEL 3 - PARTIAL FLOOR PLAN**  
N.T.S.

CONSTRUCT HOARDING WALL - COORDINATE WITH EXISTING LIGHTING THIS AREA WHICH MAY CROSS THE HOARDING LINE.

**AFTER HOURS**  
DIAGONAL HATCH REPRESENTS FLOORING & OTHER FINISHES REMOVAL AND REPLACEMENT - SEE DWGS AND SPECS - COORDINATE WITH TIMING OF HOARDING AND PHASES OF WORK. ENSURE SAFE CONDITIONS FOR DURATION OF ALL WORK

**SPECIAL NOTE**  
THIS PATH OF EXITING MUST BE OPEN AT ALL TIMES WHILE THE BUILDING IS OPERATING. WHEN CLOSURE IS REQUIRED FOR PUBLIC SAFETY AND/OR TO PERFORM WORK IT MUST BE DONE AT TIMES WHEN THE CLINICS ARE NOT IN OPERATION - COORDINATE TO OCCUR DURING PLANNED BUILDING SHUTDOWNS

CONFIRM LAYOUT OF NEW ROOF EQUIPMENT IN PREPARATION FOR NEXT PHASE OF WORK

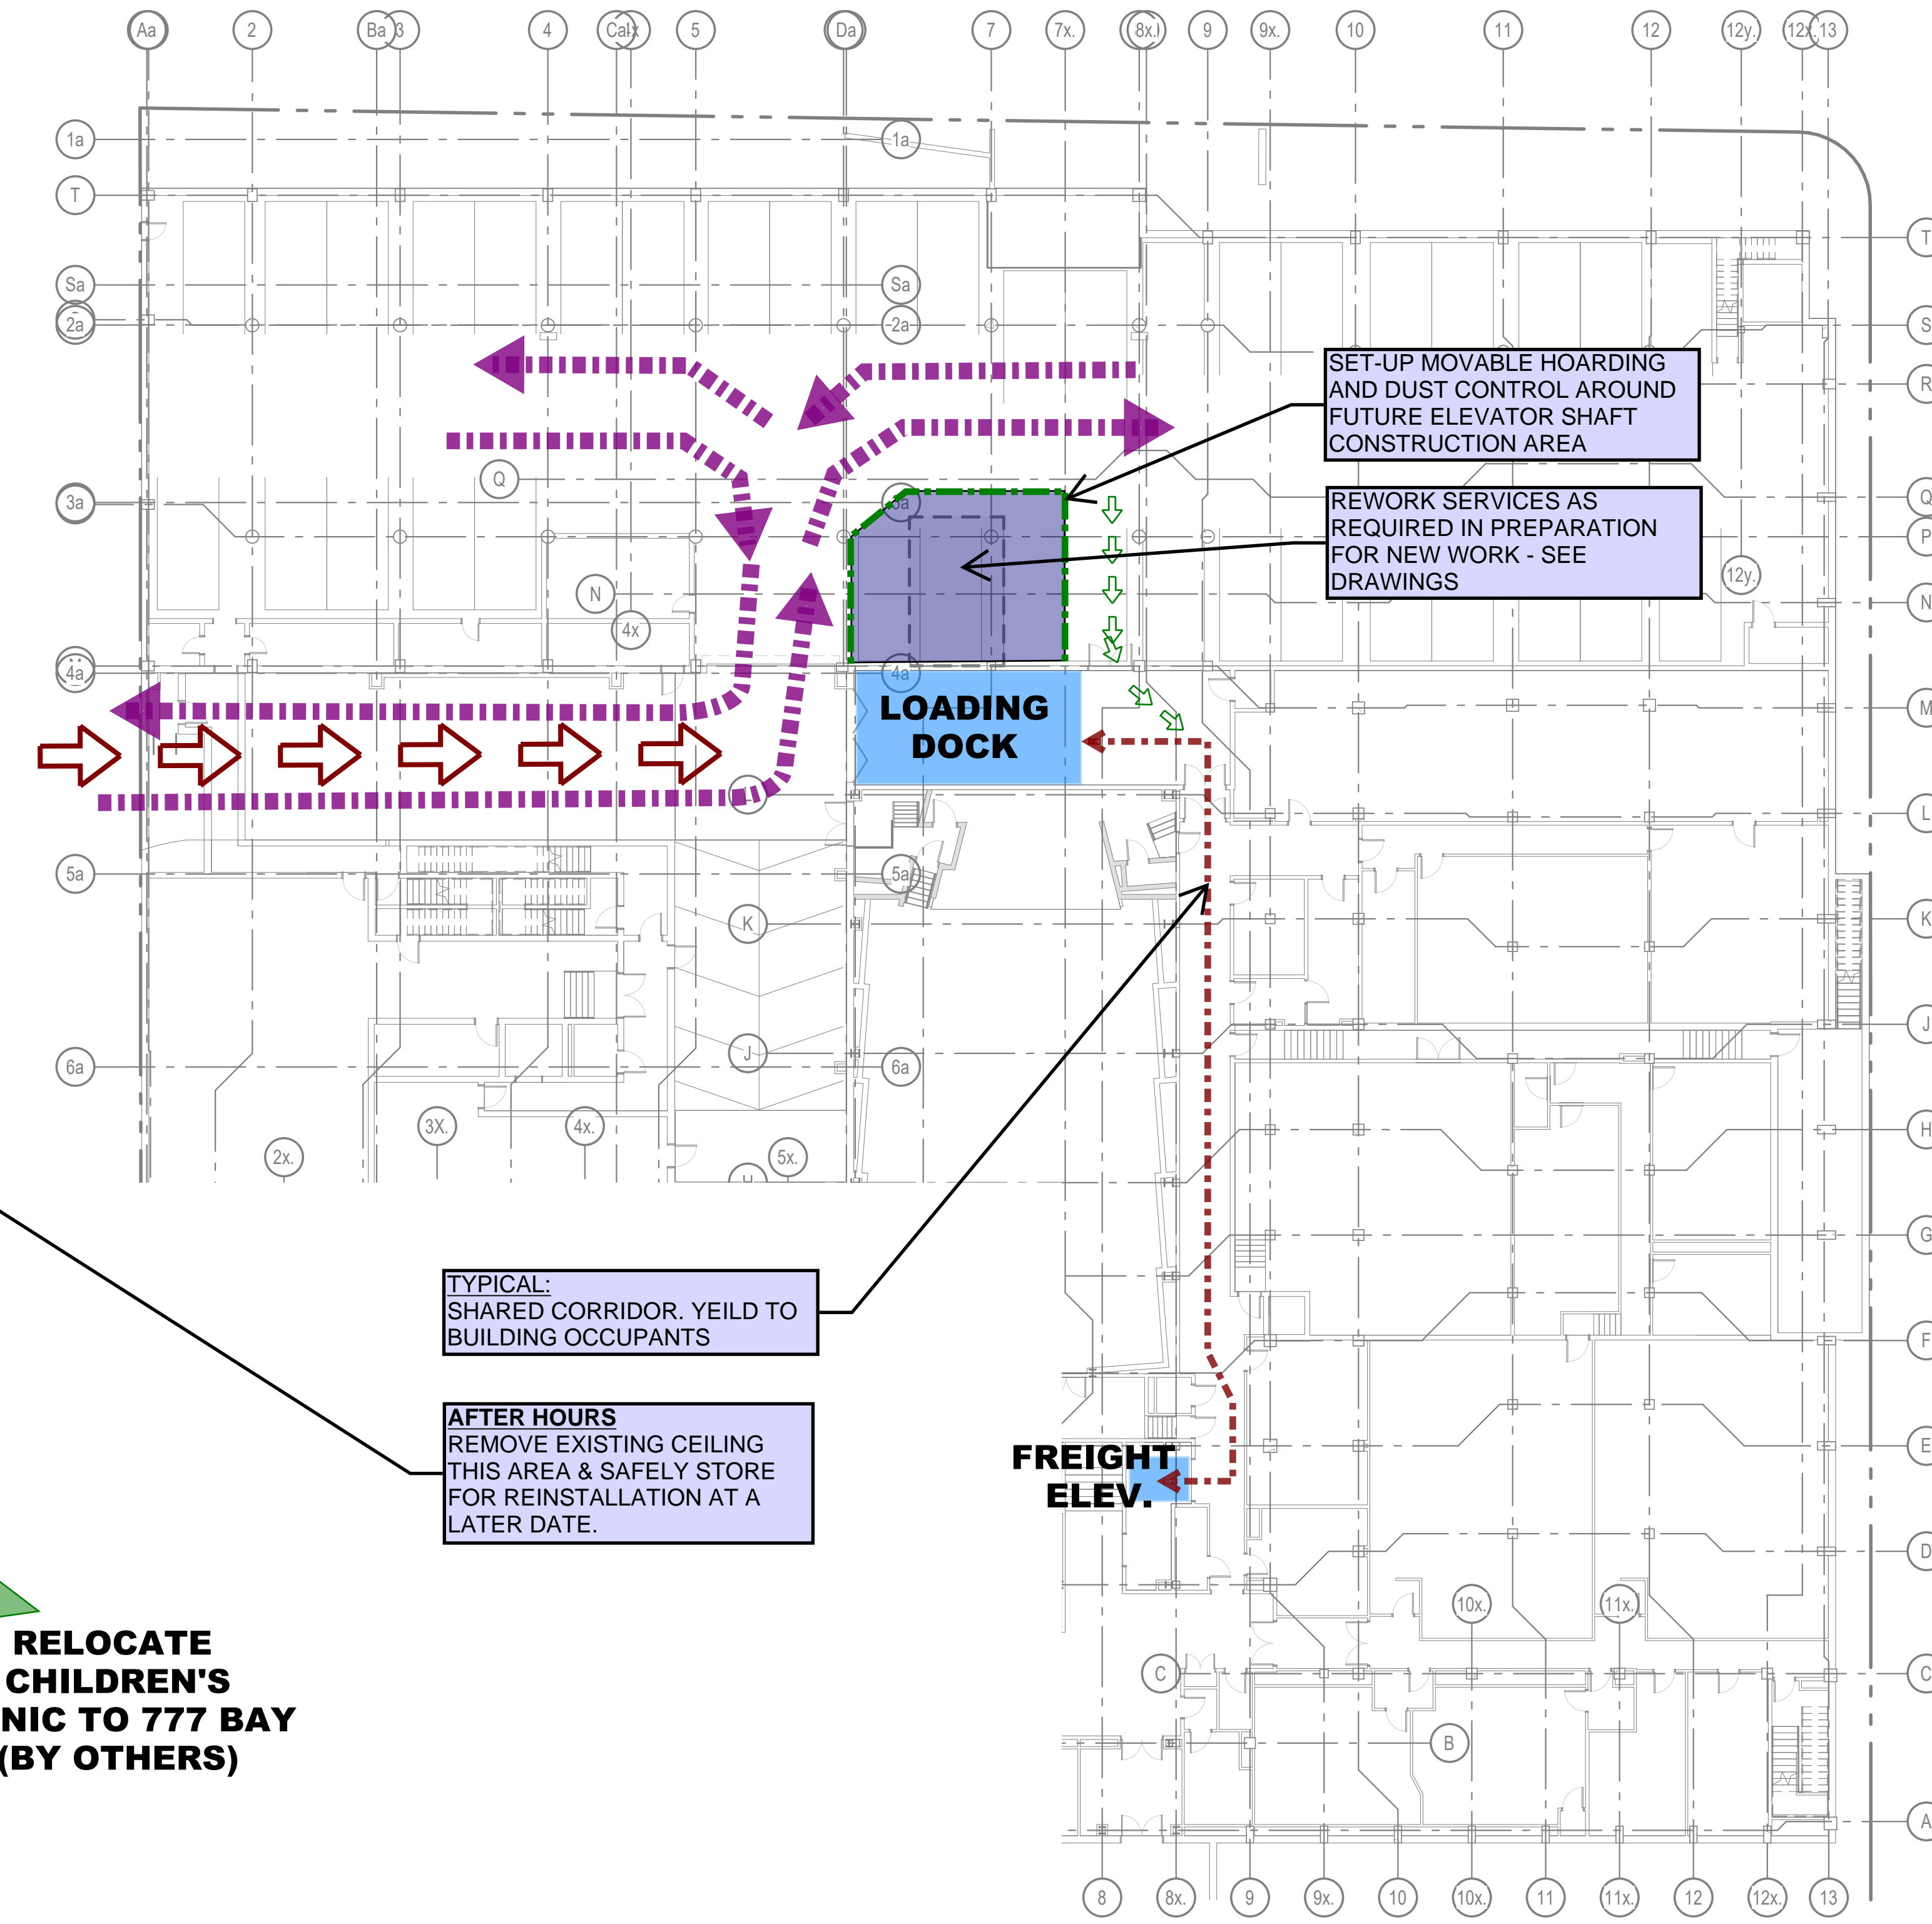

**PARKING GARAGE - PARTIAL FLOOR PLAN**  
N.T.S.

TYPICAL SHARED CORRIDOR. YIELD TO BUILDING OCCUPANTS

**AFTER HOURS**  
REMOVE EXISTING CEILING THIS AREA & SAFELY STORE FOR REINSTALLATION AT A LATER DATE.

SET-UP MOVABLE HOARDING AND DUST CONTROL AROUND FUTURE ELEVATOR SHAFT CONSTRUCTION AREA

REWORK SERVICES AS REQUIRED IN PREPARATION FOR NEW WORK - SEE DRAWINGS

**LEGEND**

PEDESTRIAN  
PATH OF TRAVEL

PUBLIC/VEHICULAR  
PATH OF TRAVEL

MAIN PATH OF  
CONSTRUCTION  
VEHICLE TRAFFIC

LINE OF TEMP. 6FT TALL  
PAINTED PLYWOOD HOARDING  
FENCE WITH SAFETY SIGNAGE  
- COORDINATE WITH OWNER'S  
BRANDING

LINE OF TEMP. GYP. WB.  
HOARDING W/ CONT. POLY  
DUST BARRIER SEALED AS  
REQD (CLINIC 2). HEAVY DUTY  
POLY DUST BARRIER (CLINIC 1)

TEMP. SAFETY BARRIER OR  
GUARD RAIL

TEMPORARY MOVABLE GATE-  
FAST FENCE OR SIMILAR

CONSTRUCTION ENTRY  
GATE

BUILDING EXIT

AREA OF DEMOLITION OR  
CONSTRUCTION

TEMPORARY POWER  
PANEL

PUBLIC PATH OF TRAVEL  
ACCESS AND EGRESS

INTERIOR CONTRACTOR  
PATH OF TRAVEL

BARRICADED DOOR OR  
OPENING TO SUIT PHASING

GENERAL NOTES:  
1. THE CONTRACTOR IS RESPONSIBLE TO  
OBTAIN AND PAY FOR ALL PERMITS  
REQUIRED FOR WORK IN THE RIGHT-OF-  
WAY.  
  
2. DAILY STREET CLEANING TO BE  
IMPLEMENTED AS REQUIRED.  
  
3. MATERIAL REMOVALS SHALL BE BY WAY  
OF ROLL-OFF REFUSE TRUCKS. THERE IS NO  
ANTICIPATED EXTERIOR SITE EXCAVATION  
AND THUS, NO STOCK PILING OF SOIL.  
  
4. THESE LOGISTICS PLANS ARE PROVIDED  
FOR REFERENCE ONLY. THE CONSTRUCTOR  
IS ULTIMATELY RESPONSIBLE FOR ALL SITE  
LOGISTICS, PLANNING AND EXECUTION TO  
SUITE THE PROJECT REQUIREMENTS. THE  
INFORMATION PROVIDED HERE IS SOLELY  
INTENDED TO HELP SUPPORT PROJECT  
APPROVALS BY THE CITY OF TORONTO AND  
TO HELP INFORM BIDDERS OF THE  
PRELIMINARY PROJECT STRATEGY FOR  
THEIR FURTHER DEVELOPMENT.

ISSUED FOR TENDER - MAY 29, 2026

100% CD - JANUARY 9, 2026

100% CD - DECEMBER 19, 2025

PERMIT - DECEMBER 5, 2025

80% CD - SEPTEMBER 26, 2025

CLINIC 1 CEILING 100% DD - SEPT. 12, 2025

CLINIC 1 CEILING 100% SD - AUGUST 15, 2025

100% DESIGN DEVELOPMENT - MAY 30, 2025

100% SCHEMATIC DESIGN - FEB. 28, 2025

DRAFT FOR SD REVIEW - FEB. 5, 2025

**OKTUS**

UNIVERSITY of TORONTO  
DENTISTRY BUILDING  
CLINIC 2 RENOVATION  
124 EDWARD STREET  
TORONTO, ON, M5G 1G6

APPROXIMATE DURATION  
JULY 2026  
TO  
SEPTEMBER 2027

LOGISTICS PLAN  
EARLY WORKS  
SITE PREPARATION

**LP-1**

NOT TO SCALE



WASHROOMS AVAILABLE FOR TRADE USE. TREAT WITH CARE. REPAIR DAMAGES AS REQUIRED.

AREAS OF EXISTING CEILINGS & FINISHES REQUIRING REMOVALS TO SUIT NEW M&E SCOPE - SEE CONSULTANT DRAWINGS AND COORDINATE WITH EXISTING CONDITIONS ON SITE - ALL WORK TO BE PERFORMED AFTER HOURS

STAGING

DEMOLITION AREA

DEMOLITION AREA

TYPICAL EVACUATE CLINIC 1 AREAS IN SEQUENCE WITH FINAL CEILING PHASING (BY OTHERS) CONTRACTOR TO COORDINATE TIMING WITH OWNER'S OPERATIONS

PATIENT LOBBY - FLOOR PLAN N.T.S.

GENERAL NOTE: WHERE CEILINGS AND FINISHES ARE REMOVED TO ACCOMMODATE M&E SCOPE, ENSURE THAT LIGHTING, LIFE SAFETY ITEMS AND DEVICES REMAIN ACTIVE FOR THE DURATION. PROVIDE TEMPORARY HANGERS, DEVICES AND OTHER ITEMS WHERE REQUIRED. REMOVE TEMP PROVISIONS WHEN NO LONGER REQUIRED AND MAKE GOOD. REINSTATE ALL FINISHES. SEE CONSULTANT DRAWINGS FOR SCOPE. EXTENT OF AFFECTED FINISHES TO BE COORDINATED ON SITE BY CONTRACTOR.

NOTE: STRUCTURAL COMPONENTS MAY EXTEND BEYOND HOARDING THIS LOCATION. VERIFY ON SITE AND INSTALL AFTER HOURS

KNOWN ASBESTOS ZONE SEE DWGS, SPECIFICATIONS AND U of T SCOPE - INCLUDES CEILING SPACES OF LARGE ROOMS 102 AND 133.

OVERHEAD WORK FOR ELECTRICAL SCOPE TO BE COMPLETED AFTER HOURS UNLESS OTHERWISE COORDINATED AND AGREED WITH BUILDING OPERATIONS IN ADVANCE - APPLIES TO DEMO AND NEW WORK

DEMO AREA

LOADING DOCK

REFUSE

CONTRACTOR TO COORDINATE TIMING OF REFUSE STORAGE, BIN DROP OFFS AND REMOVALS WITH BUILDING OPERATOR. PERMISSION MAY NOT ALWAYS BE PROVIDED.

ORANGE SHADING REPRESENTS ASSUMED LOCATION TO RUN NEW FEEDERS FROM EXISTING ELECTRICAL ROOM 01B TO NEW ELECTRICAL ROOM ON THE 2ND FLOOR - CONTRACTOR TO VERIFY ON SITE. COORDINATE ALL FINISHES REMOVALS AND REINSTATEMENTS AS WELL AND FEEDER INSTALLATION AFTER HOURS

AFTER HOURS PERFORM REMOVALS AS SHOWN ON DRAWINGS - PROTECT ALL EXISTING, CLEAN AND MAKE GOOD FOR OPERATION NIGHTLY

FREIGHT ELEV.

LEVEL 1 - PARTIAL FLOOR PLAN N.T.S.

PARKING GARAGE - PARTIAL FLOOR PLAN N.T.S.

KNOWN ASBESTOS ZONE SEE DWGS, SPECIFICATIONS AND U of T SCOPE

AREAS OF EXISTING CEILING & FINISHES REQUIRING REMOVALS TO SUIT NEW M&E SCOPE - SEE CONSULTANT DRAWINGS AND COORDINATE WITH EXISTING CONDITIONS ON SITE - ALL WORK TO BE PERFORMED AFTER HOURS

PATIENT LOBBY BELOW

DEMOLITION AREA

DEMOLITION AREA

FREIGHT ELEV.

ENSURE FREE AND CLEAR EGRESS THROUGH EXIT CORRIDOR AT ALL TIMES

IMPORTANT NOTE: NO ACCESS OR EGRESS IS PERMITTED TO BE ROUTED THROUGH THIS AREA - RESTRICTED TO OWNER'S ORTHODONICS CLINIC USE ONLY

IMPORTANT NOTE: EXISTING IT EQUIPMENT TO REMAIN ACTIVE ALWAYS. COORDINATE AFTER HOURS TIMING TO TRANSFER ALL EXISTING DATA CABLES TO NEW RACKS IN ORDER TO NOT AFFECT BUILDING OPERATIONS - SEE ELECTRICAL DRAWINGS

KNOWN ASBESTOS ZONES SEE DWGS, SPECS AND U of T SCOPE

YIELD TO BUILDING OCCUPANTS AND EXITING REQUIREMENTS AT ALL TIMES. ONLY CROSS CORRIDOR WHEN IT IS SAFE FOR ALL. NO MATERIAL STORAGE PERMITTED IN CORRIDOR

THIS ROOM TO BE USED FOR TEMPORARY REFUSE CHUTE ACCESS. PROTECT ALL FINISHES AND MAKE GOOD AT COMPLETION. REMOVE EXIST. WINDOW COMPONENTS AS REQUIRED. STORE SAFELY AND REINSTALL TO EXISTING CONDITION OR BETTER AT COMPLETION OF WORK. PROVIDE WEATHER AND RODENT PROOF CLOSERS DURING THE COURSE OF WORK.

AFTER HOURS SEE DRAWINGS AND SPECIFICATIONS FOR FIRESTOPPING SCOPE IN ALL AREAS SURROUNDING THE CLERESTORY AT THE 3RD FLOOR LEVEL - COORDINATE TIMING AND ACCESS WITH BUILDING OPERATIONS

AFTER HOURS DIAGONAL HATCH REPRESENTS FLOORING & OTHER FINISHES REMOVAL AND REPLACEMENT - SEE DWGS AND SPECS - COORDINATE WITH TIMING OF HOARDING AND PHASES OF WORK. ENSURE SAFE CONDITIONS FOR DURATION OF ALL WORK  
SPECIAL NOTE THIS PATH OF EXITING MUST BE OPEN AT ALL TIMES WHILE THE BUILDING IS OPERATING. WHEN CLOSURE IS REQUIRED FOR PUBLIC SAFETY AND/OR TO PERFORM WORK IT MUST BE DONE AT TIMES WHEN THE CLINICS ARE NOT IN OPERATION - COORDINATE TO OCCUR DURING PLANNED BUILDING SHUTDOWNS

STAGING AREA AT TOP OF STAIR SHAFT IS SMALL - CONTRACTOR TO PROVIDE STAGING AND ERECTION PLAN FOR PROJECT TEAM REVIEW PRIOR TO COMMENCEMENT OF WORK


PROTECT ALL EQUIPMENT AND OTHER ITEMS REMAINING IN THE ROOM FROM DUST AND DAMAGE FOR THE DURATION OF THE WORK.

AFTER HOURS SEE DRAWINGS AND SPECIFICATIONS FOR FIRESTOPPING SCOPE IN ALL AREAS SURROUND THE CLERESTORY AT THE 3RD FLOOR LEVEL - COORDINATE TIMING AND ACCESS WITH BUILDING OPERATIONS

LEVEL 3 - PARTIAL FLOOR PLAN N.T.S.

ROOF - PARTIAL PLAN N.T.S.

TYPICAL MAKE OPENINGS FOR NEW DUCTWORK PENETRATIONS INFILL ROOFING AND PROVIDE TEMPORARY ENCLOSURES AS REQ'D TO MAKE WEATHER-TIGHT FOR DURATION AND READY FOR EQUIPMENT

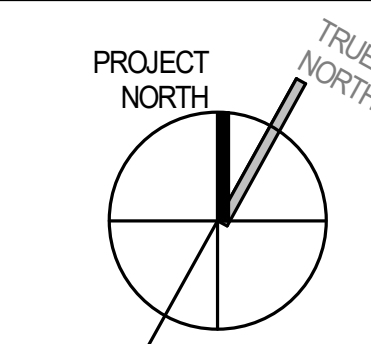

## LEGEND

PEDESTRIAN PATH OF TRAVEL	→ → →
PUBLIC VEHICULAR PATH OF TRAVEL	→ → →
MAIN PATH OF CONSTRUCTION VEHICLE TRAFFIC	→ → →
LINE OF TEMP. 6FT TALL PAINTED PLYWOOD HOARDING FENCE WITH SAFETY SIGNAGE - COORDINATE WITH OWNER'S BRANDING	■■■■■
LINE OF TEMP. GYP. WB. HOARDING W/ CONT. POLY DUST BARRIER SEALED AS REQ'D (CLINIC 2). HEAVY DUTY POLY DUST BARRIER (CLINIC 1)	.....
TEMP. SAFETY BARRIER OR GUARD RAIL	- - - - -
TEMPORARY MOVABLE GATE- FAST FENCE OR SIMILAR	- - - - -
CONSTRUCTION ENTRY GATE	G1
BUILDING EXIT	▲
AREA OF DEMOLITION OR CONSTRUCTION	■
TEMPORARY POWER PANEL	⚡
PUBLIC PATH OF TRAVEL ACCESS AND EGRESS	→
INTERIOR CONTRACTOR PATH OF TRAVEL	→
BARRICADED DOOR OR OPENING TO SUIT PHASING	X

GENERAL NOTES:  
1. THE CONTRACTOR IS RESPONSIBLE TO OBTAIN AND PAY FOR ALL PERMITS REQUIRED FOR WORK IN THE RIGHT-OF-WAY.  
2. DAILY STREET CLEANING TO BE IMPLEMENTED AS REQUIRED.  
3. MATERIAL REMOVALS SHALL BE BY WAY OF ROLL-OFF REFUSE TRUCKS. THERE IS NO ANTICIPATED EXTERIOR SITE EXCAVATION AND THUS, NO STOCK PILING OF SOIL.  
4. THESE LOGISTICS PLANS ARE PROVIDED FOR REFERENCE ONLY. THE CONSTRUCTOR IS ULTIMATELY RESPONSIBLE FOR ALL SITE LOGISTICS, PLANNING AND EXECUTION TO SUIT THE PROJECT REQUIREMENTS. THE INFORMATION PROVIDED HERE IS SOLELY INTENDED TO HELP SUPPORT PROJECT APPROVALS BY THE CITY OF TORONTO AND TO HELP INFORM BIDDERS OF THE PRELIMINARY PROJECT STRATEGY FOR THEIR FURTHER DEVELOPMENT.

ISSUED FOR TENDER - MAY 29, 2026
100% CD - JANUARY 9, 2026
100% CD - DECEMBER 19, 2025
PERMIT - DECEMBER 5, 2025
80% CD - SEPTEMBER 26, 2025
CLINIC 1 CEILING 100% DD - SEPT. 12, 2025
CLINIC 1 CEILING 100% SD - AUGUST 15, 2025
100% DESIGN DEVELOPMENT - MAY.30.2025
100% SCHEMATIC DESIGN - FEB.28.2025
DRAFT FOR SD REVIEW - FEB.5.2025

OKTUS

UNIVERSITY of TORONTO  
DENTISTRY BUILDING  
CLINIC 2 RENOVATION  
124 EDWARD STREET  
TORONTO, ON, M5G1G6

APPROXIMATE DURATION  
JULY 2026  
TO  
SEPTEMBER 2027

LOGISTICS PLAN

DEMOLITION

LP-2

NOT TO SCALE



ORANGE CROSS-HATCHED SHADING REPRESENTS AREAS OF NEW SURFACE MOUNTED FIRE PROTECTION SYSTEMS - SEE DRAWINGS AND SPECIFICATIONS FOR SCOPE

BARRICADE THESE DOORS DURING PHASE 1 ONLY


AFTER HOURS  
ALL REPLACEMENT FINISHES IN CORRIDORS. COORDINATE WITH HOARDING REMOVALS. REPLACE HOARDINGS WITH LOCALIZED POLY DUST BARRIERS AND DUST MITIGATION PROTOCOL WHERE REQUIRED.

TYPICAL EVERYWHERE:  
INSTALL TEMP. SIGNAGE TO DIRECT TRAFFIC AWAY FROM WORK AREAS WHEN CLOSED TO PUBLIC AND ENSURE PROPER LIFE/SAFETY EGRESS

**CRITICAL NOTE:**  
EXIT CORRIDOR MUST BE CLEANED DAILY AND LEFT OPEN FOR PUBLIC USE DURING REGULAR HOURS. ONLY SHUTDOWN AS NEEDED TO PERFORM WORK AFTER HOURS. EXISTING FURNISHINGS, EQUIPMENT AND CONSTRUCTION TO BE PROTECTED AT ALL TIMES.

**CRITICAL NOTE:**  
MAXIMUM NUMBER OF CHAIRS OUTSIDE THE CONSTRUCTION AREA MUST REMAIN ACTIVE AT ALL TIMES.  
AFTER HOURS PERFORM REMOVALS AND NEW WORK (1) PHASE AT A TIME. AT THE COMPLETION OF EACH PHASE CLEAN AND MAKE DUST FREE FOR IMMEDIATE USE BY UoT. DUST ELIMINATION IS PARAMOUNT AT ALL TIMES. USE DUST MANAGEMENT/AIR CLEANING EQUIPMENT AS REQUIRED. COORDINATE TIMING OF PHASES WITH BUILDING OPERATOR. ONLY (1) PHASE SHALL BE ACTIVE AT ANY GIVEN TIME.

APPROXIMATE AREAS AND LOCATIONS SHADED IN ORANGE - REINSTATE ALL EXISTING CONDITIONS AND FINISHES REMOVED IN EARLIER PHASES OF WORK AND MAKE GOOD. THIS APPLIES TO ALL AREAS ON ALL FLOORS, ALSO REFER TO CONSULTANT DRAWINGS FOR SCOPE

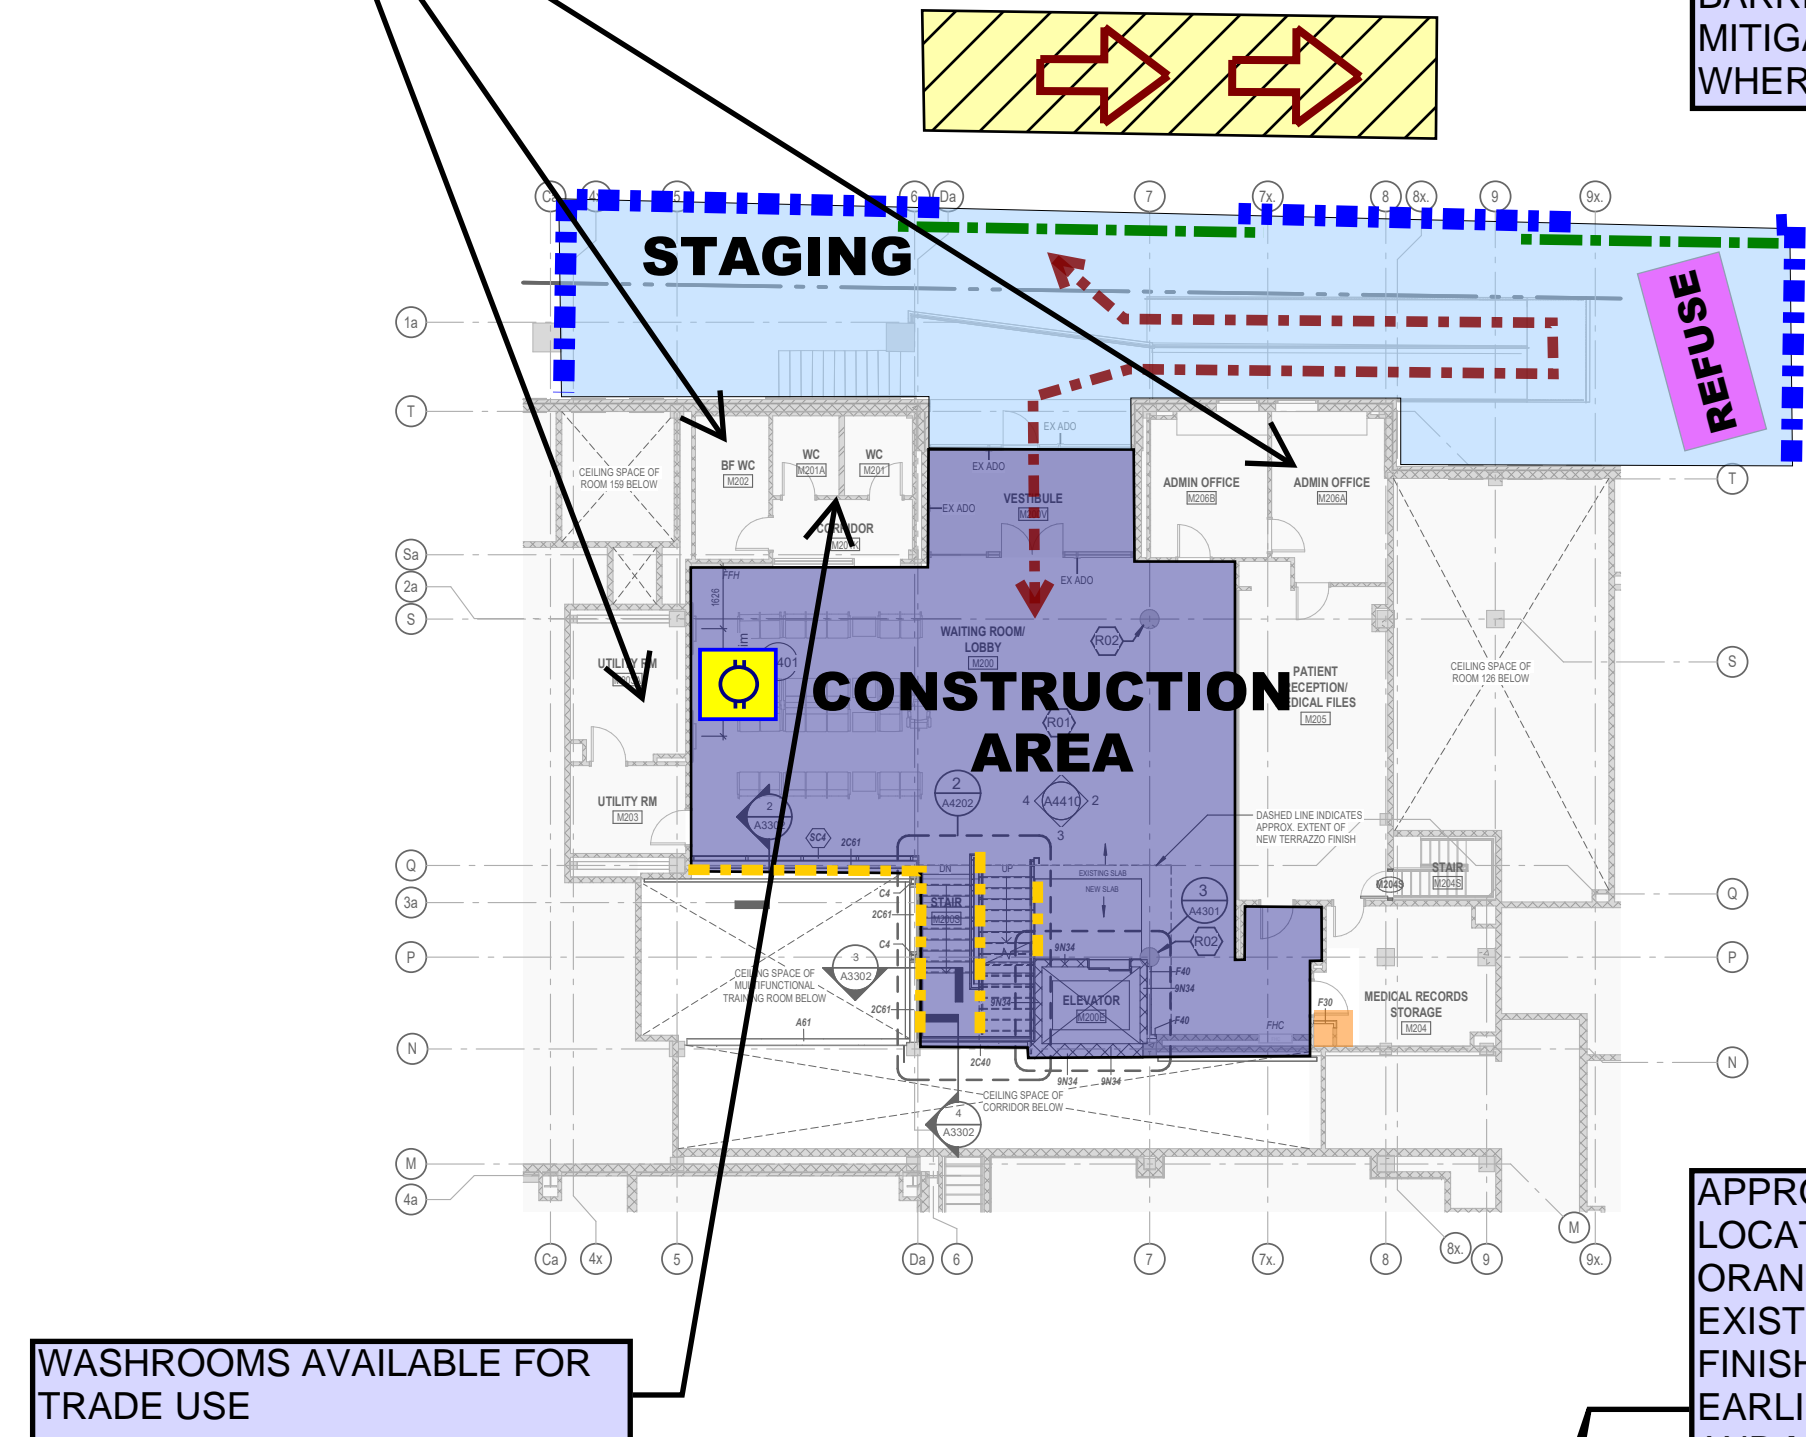

PATIENT LOBBY - FLOOR PLAN  
N.T.S.

APPROXIMATE AREAS AND LOCATIONS SHADED IN ORANGE - REINSTATE ALL EXISTING CONDITIONS AND FINISHES REMOVED IN EARLIER PHASES OF WORK AND MAKE GOOD. THIS APPLIES TO ALL AREAS ON ALL FLOORS, ALSO REFER TO CONSULTANT DRAWINGS FOR SCOPE

**IMPORTANT NOTE:**  
DISPENSARY RM. ACCESS ON ALL SIDES TO REMAIN OPEN AT ALL TIMES. THESE DOORS AND PATH TO REMAIN OPEN DURING PHASE 2 - PROVIDE DUST PROOF COVERED-WAY WITH MIN. CLEAR WIDTH OF 1800mm, MIN. CLEAR HEAD HEIGHT OF 2400mm. TEMPORARY LIGHTING TO MEET EXISTING LIGHT LEVELS. SOLID ROOF FOR OVERHEAD PROTECTION AND TO BE USED AS A WORKING PLATFORM BY THE CONTRACTOR IF NEEDED

BARRICADE THIS DOOR DURING PHASE 3 ONLY

AFTER HOURS  
ALL FINISHES IN CORRIDOR

LEVEL 1 - PARTIAL FLOOR PLAN  
N.T.S.

BARRICADE THESE DOORS DURING PHASE 4 ONLY

AFTER HOURS  
SEE DWGS FOR BEAM AND PLUMBING THIS AREA. CLEAN/MAKE GOOD NIGHTLY REINSTALL CEILINGS WHEN COMPLETE.

ALL DENTAL CHAIRS AND REMAINING CONTENTS IN WORK AREAS TO BE PROTECTED AND SEALED FROM DUST AT ALL TIMES IN WORK AREAS.

ENSURE PATHWAYS FOR ACCESS TO ACTIVE DENTAL UNITS - ADJUST WITH PHASING OF CEILING WORK


CONTRACTOR TO COORDINATE TIMING OF REFUSE STORAGE, BIN DROP OFFS AND REMOVALS WITH BUILDING OPERATOR

BARRICADE THIS DOOR DURING PHASE 3 ONLY

**NOTE:**  
THIS AREA MAY BE USED FOR PATIENT OVERFLOW TO COMPENSATE FOR CLOSURES OF PHASES 1, 2 OR 3.

**DIRECTION OF WORKFLOW IS A RECOMMENDATION ONLY. CONTRACTOR TO REVIEW SITE CONDITIONS AND SCOPE TO DETERMINE REQUIRED WORKFLOW. REVIEW AND DISCUSS PROPOSED WORKFLOW CHANGES WITH THE PROJECT TEAM IN ADVANCE OF PROCEEDING**

PARKING GARAGE - PARTIAL FLOOR PLAN  
N.T.S.

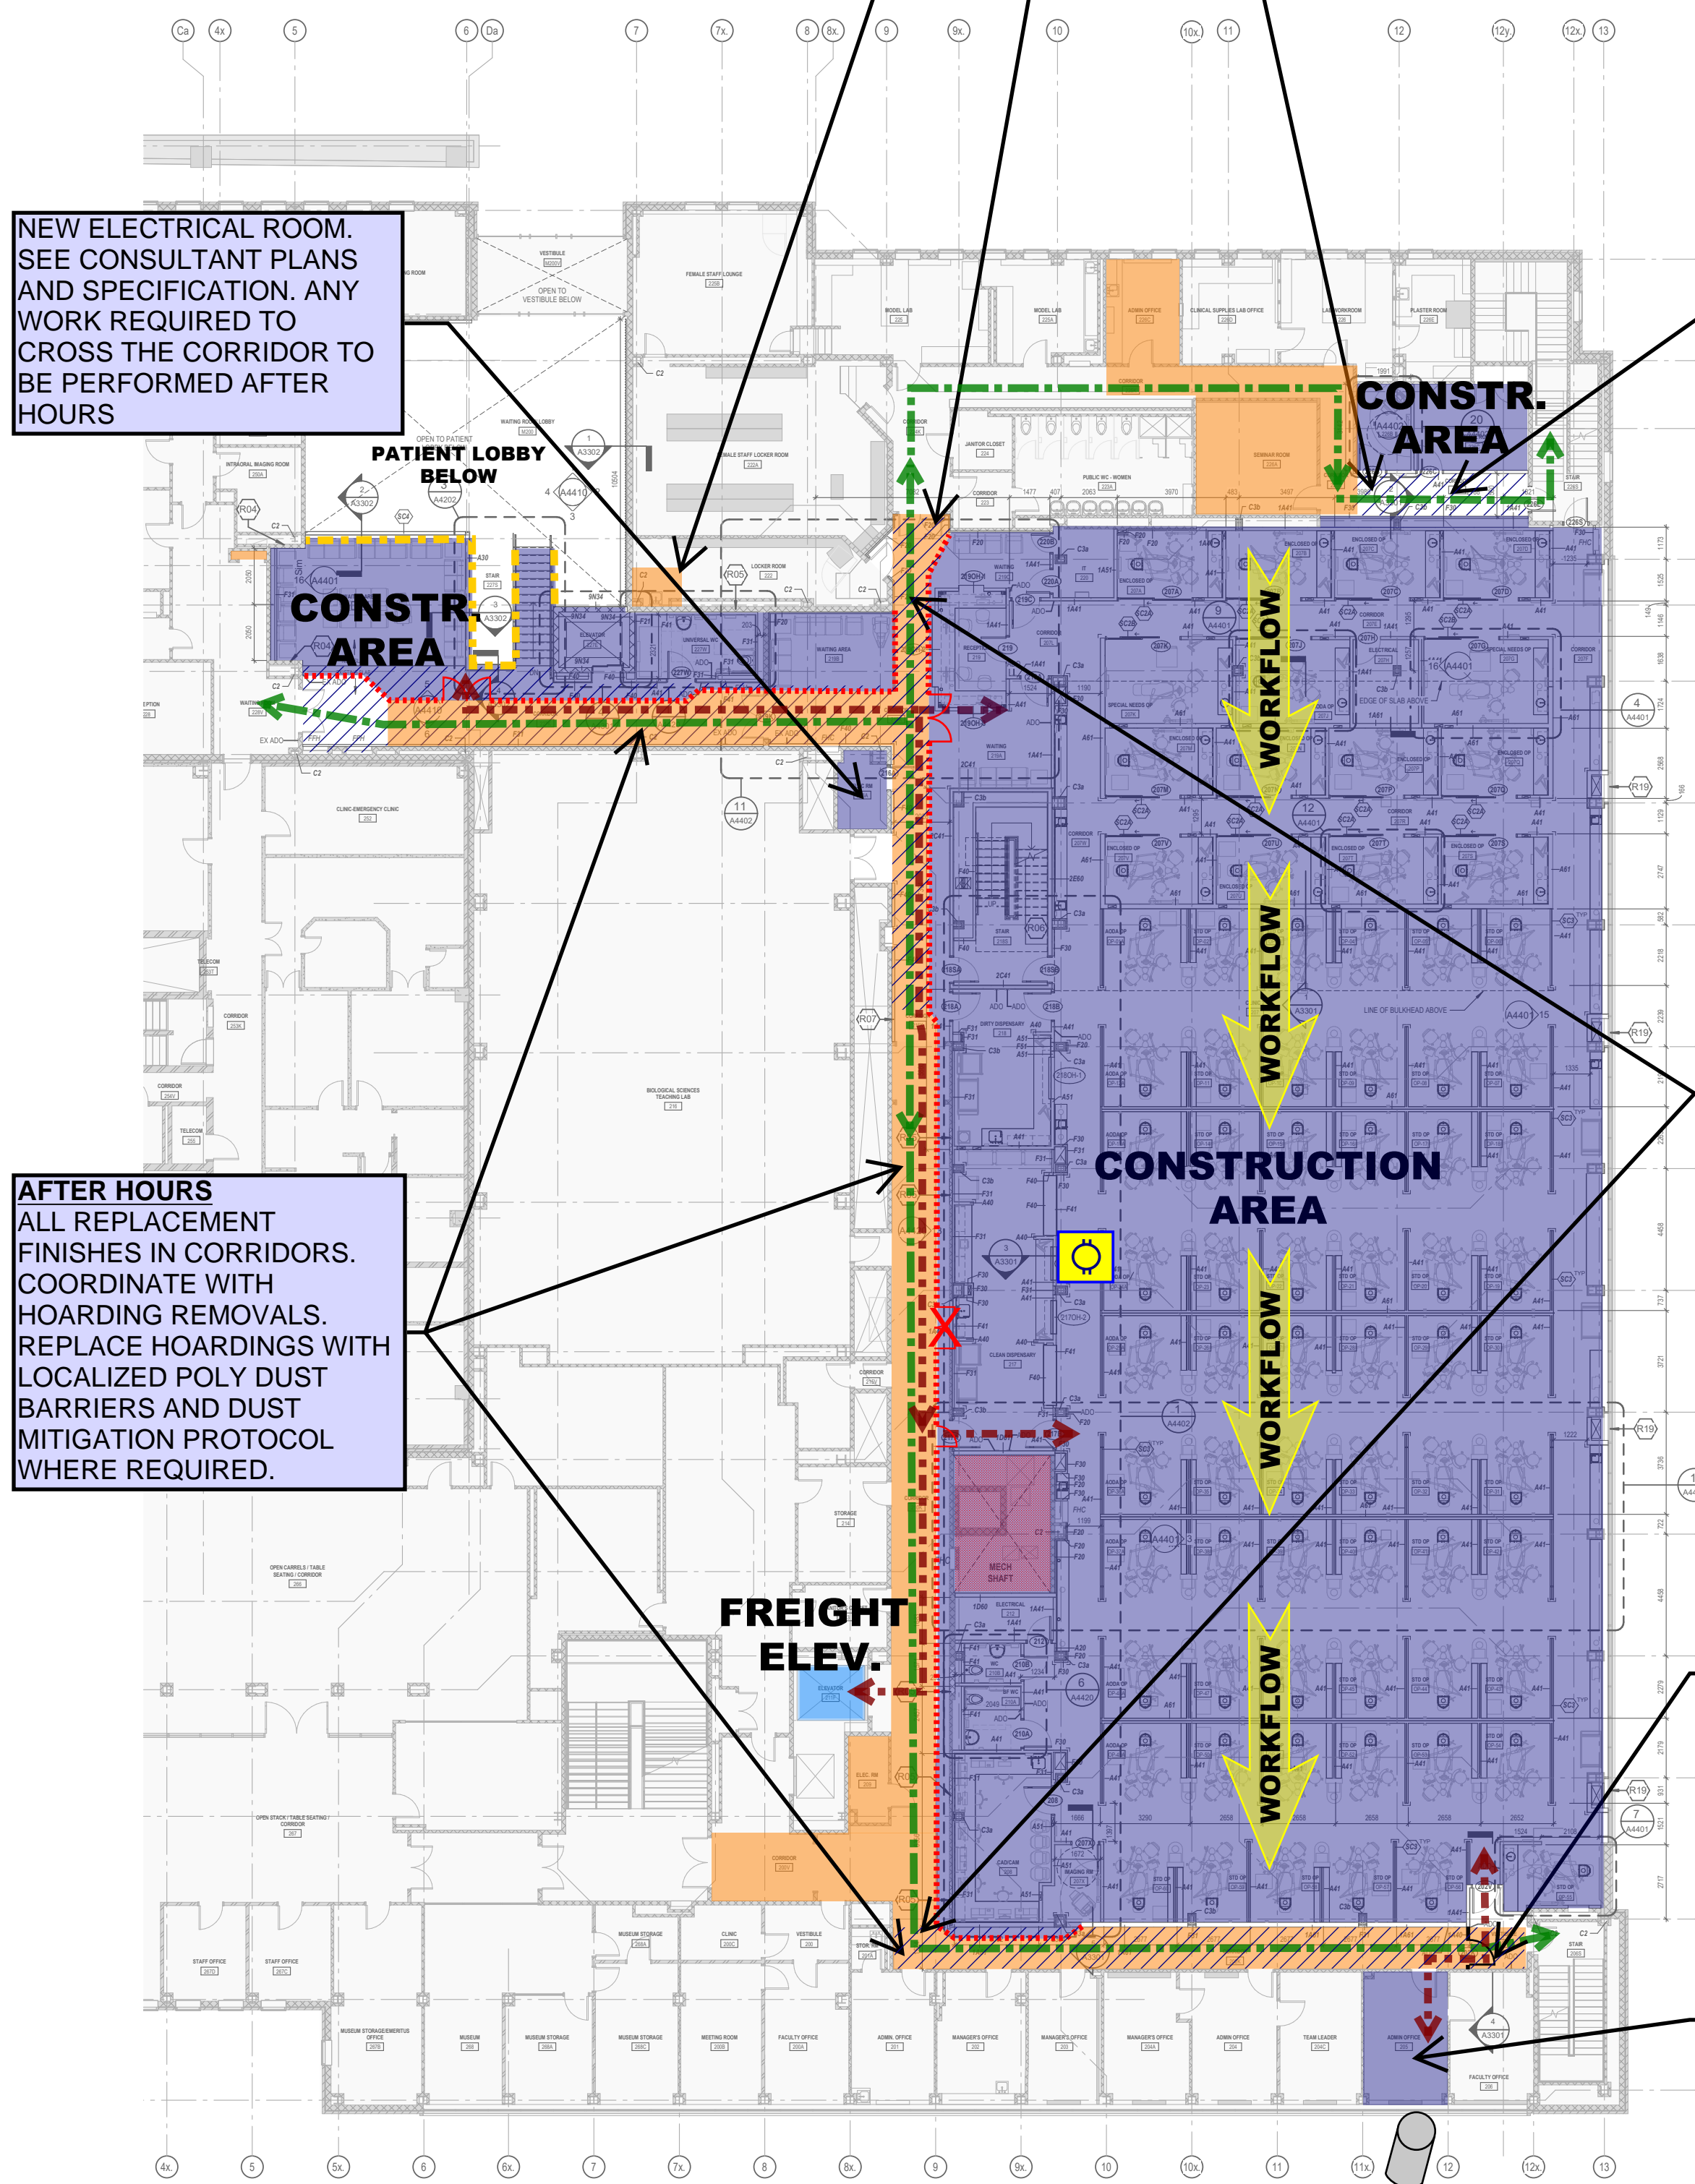

LEVEL 2 - PARTIAL FLOOR PLAN  
N.T.S.

ENSURE FREE AND CLEAR EGRESS AT EXIT CORRIDOR AT ALL TIMES

**IMPORTANT NOTE:**  
NO ACCESS OR EGRESS IS PERMITTED TO BE ROUTED THROUGH THIS AREA - RESTRICTED TO OWNER'S ORTHODONICS CLINIC USE ONLY

REOPEN OPERATORY ROOM FOR OWNER'S USE IN THE LEAST AMOUNT OF TIME POSSIBLE - SEE DRAWINGS AND SPECS FOR SCOPE AND COORDINATE TIMING WITH CLIENTS NEEDS

AFTER HOURS  
MAKE GOOD FINISHES WHERE DOORS AND WALLS WERE REMOVED IN PREVIOUS PHASES


AFTER HOURS  
CONSTRUCT DOOR AND WALL THIS LOCATION WHEN PHASING AND GARBAGE DISPOSAL REQUIREMENTS ALLOW. PROVIDE POLY DUST BARRIERS AND DUST MITIGATION PROTOCOL. ENSURE ACCESS TO EXIT AT ALL TIMES

DISMANTLE & REMOVE REFUSE EQUIPMENT AND TEMP. PROTECTION WHEN NO LONGER REQUIRED. MAKE GOOD ALL EXISTING.


LEVEL 3 - PARTIAL FLOOR PLAN  
N.T.S.

ROOF ACCESS DOOR AT 4TH LEVEL MECHANICAL ROOM. COORDINATE ACCESS AND TIMING OF WORK WITH BUILDING OPERATIONS

SEE DRAWINGS AND SPECIFICATIONS FOR SCOPE IN SERVICE AREAS. COORDINATE ACCESS AND TIMING OF WORK WITH BUILDING OPERATIONS - TYPICAL

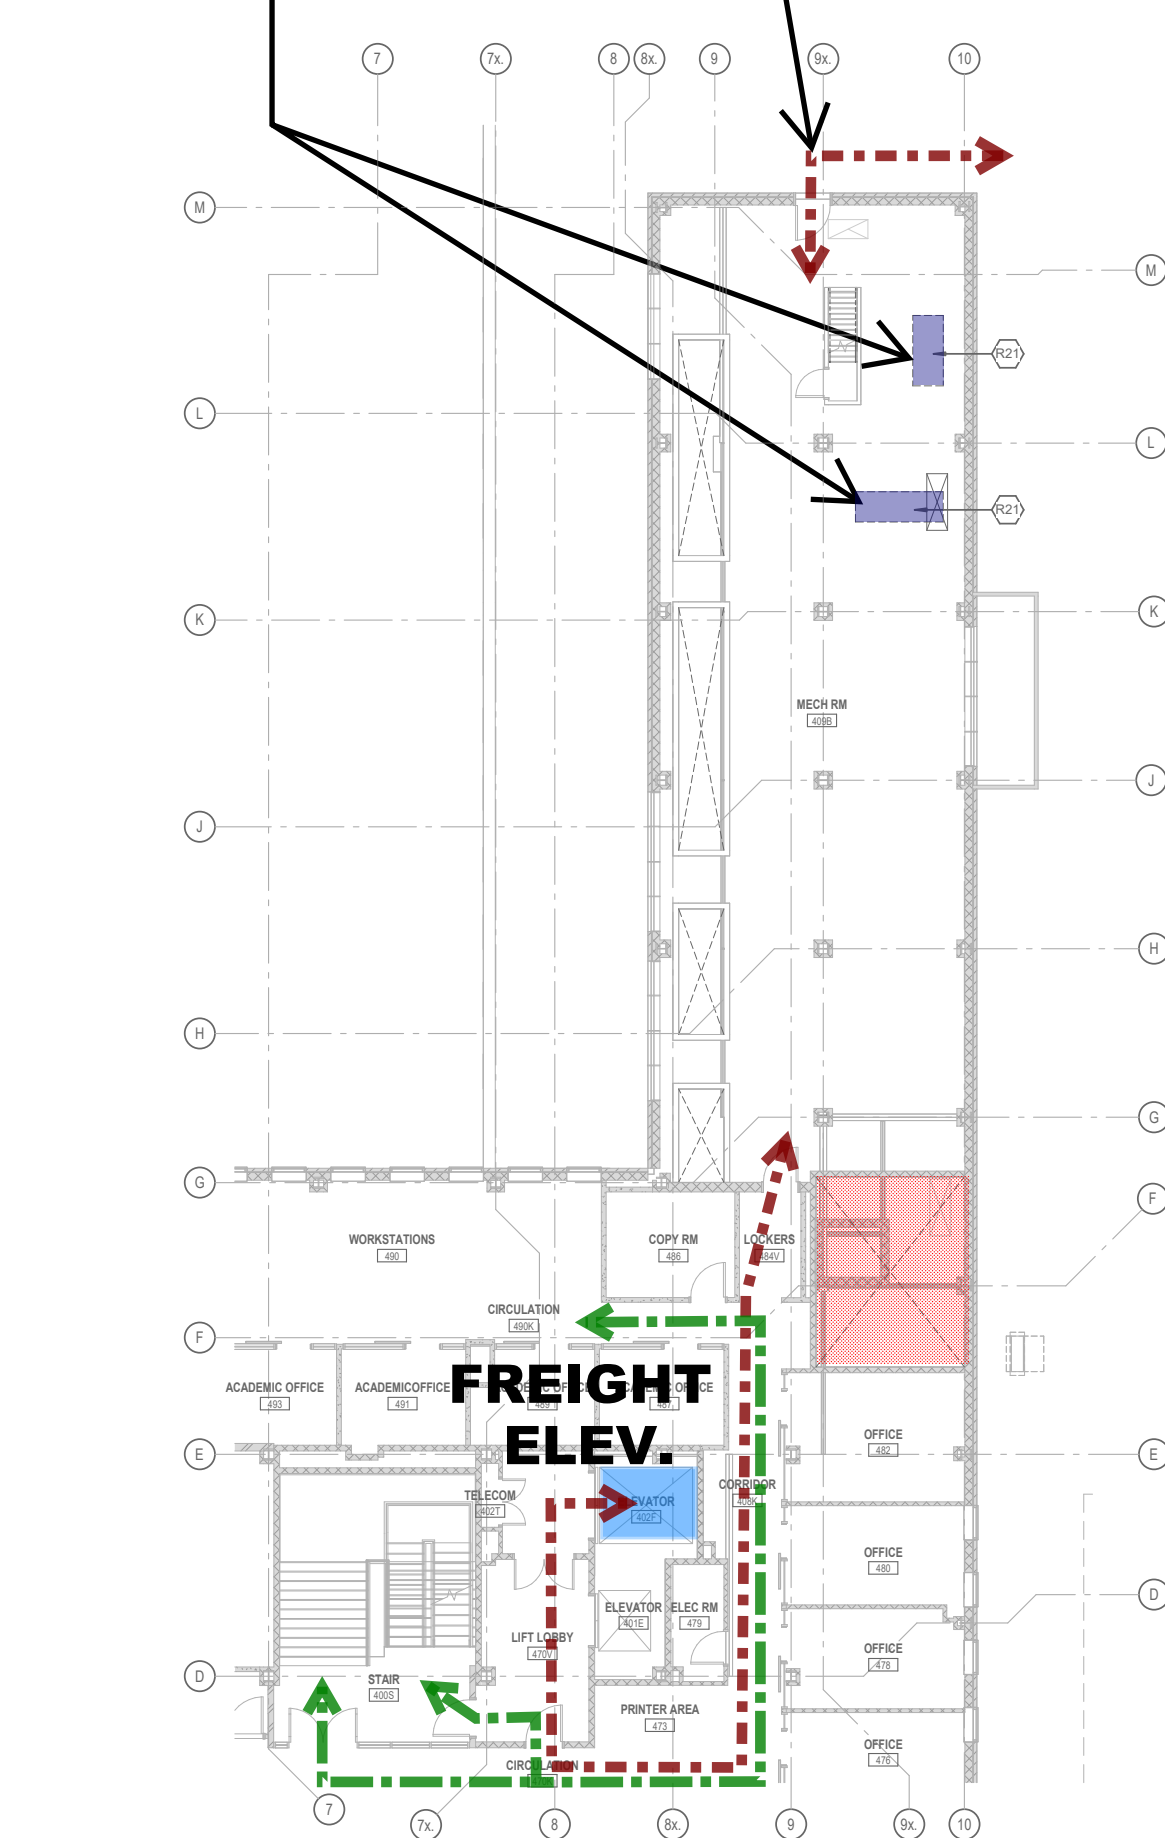


LEVEL 4 - ROOF - PARTIAL PLAN  
N.T.S.

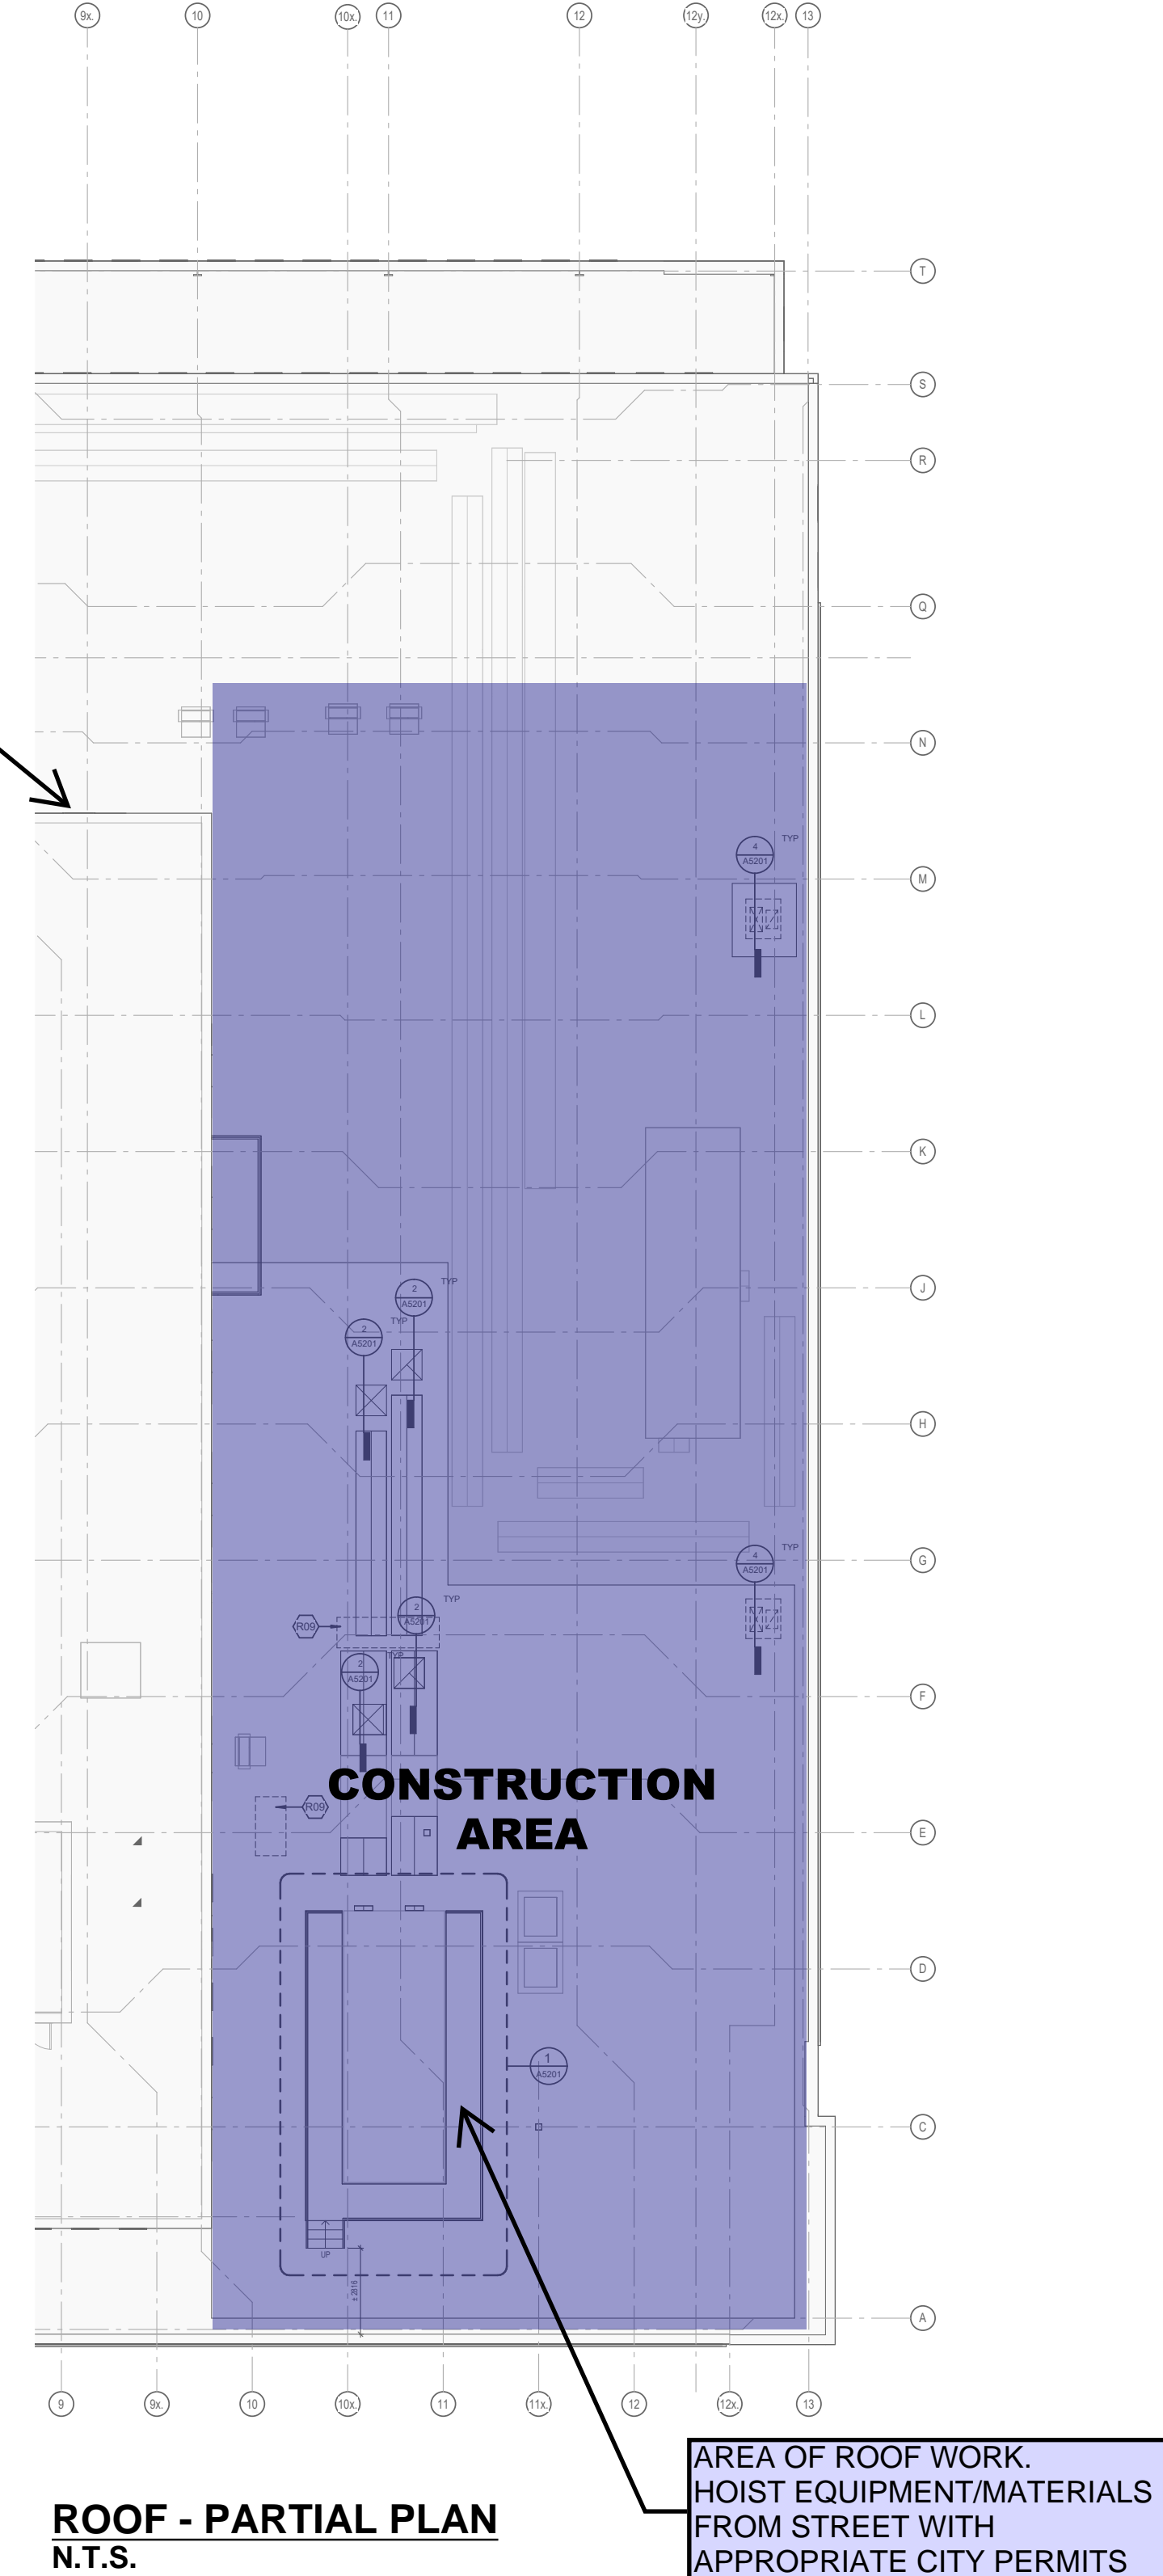

ROOF - PARTIAL PLAN  
N.T.S.

AREA OF ROOF WORK. HOIST EQUIPMENT/MATERIALS FROM STREET WITH APPROPRIATE CITY PERMITS



## LEGEND

PEDESTRIAN PATH OF TRAVEL	→ → →
PUBLIC/VEHICULAR PATH OF TRAVEL	→ → →
MAIN PATH OF CONSTRUCTION VEHICLE TRAFFIC	→ → →
LINE OF TEMP. 6FT TALL PAINTED PLYWOOD HOARDING FENCE WITH SAFETY SIGNAGE - COORDINATE WITH OWNER'S BRANDING	■■■■■
LINE OF TEMP. GYP. WB. HOARDING W/ CONT. POLY DUST BARRIER SEALED AS REQ'D (CLINIC 2). HEAVY DUTY POLY DUST BARRIER (CLINIC 1)	.....
TEMP. SAFETY BARRIER OR GUARD RAIL	- - - - -
TEMPORARY MOVABLE GATE- FAST FENCE OR SIMILAR	- - - - -
CONSTRUCTION ENTRY GATE	G1
BUILDING EXIT	▲
AREA OF DEMOLITION OR CONSTRUCTION	■
TEMPORARY POWER PANEL	⚡
PUBLIC PATH OF TRAVEL ACCESS AND EGRESS	→ → →
INTERIOR CONTRACTOR PATH OF TRAVEL	- - - - -
BARRICADED DOOR OR OPENING TO SUIT PHASING	X

GENERAL NOTES:  
1. THE CONTRACTOR IS RESPONSIBLE TO OBTAIN AND PAY FOR ALL PERMITS REQUIRED FOR WORK IN THE RIGHT-OF-WAY.  
2. DAILY STREET CLEANING TO BE IMPLEMENTED AS REQUIRED.  
3. MATERIAL REMOVALS SHALL BE BY WAY OF ROLL-OFF REFUSE TRUCKS. THERE IS NO ANTICIPATED EXTERIOR SITE EXCAVATION AND THUS, NO STOCK PILING OF SOIL.  
4. THESE LOGISTICS PLANS ARE PROVIDED FOR REFERENCE ONLY. THE CONSTRUCTOR IS ULTIMATELY RESPONSIBLE FOR ALL SITE LOGISTICS, PLANNING AND EXECUTION TO SUIT THE PROJECT REQUIREMENTS. THE INFORMATION PROVIDED HERE IS SOLELY INTENDED TO HELP SUPPORT PROJECT APPROVALS BY THE CITY OF TORONTO AND TO HELP INFORM BIDDERS OF THE PRELIMINARY PROJECT STRATEGY FOR THEIR FURTHER DEVELOPMENT.

ISSUED FOR TENDER - MAY 29, 2026
100% CD - JANUARY 9, 2026
100% CD - DECEMBER 19, 2025
PERMIT - DECEMBER 5, 2025
80% CD - SEPTEMBER 26, 2025
CLINIC 1 CEILING 100% DD - SEPT. 12, 2025
CLINIC 1 CEILING 100% SD - AUGUST 15, 2025
100% DESIGN DEVELOPMENT - MAY.30.2025
100% SCHEMATIC DESIGN - FEB.28.2025
DRAFT FOR SD REVIEW - FEB.5.2025

OKTUS<sup>®</sup>

UNIVERSITY of TORONTO  
DENTISTRY BUILDING  
CLINIC 2 RENOVATION  
124 EDWARD STREET  
TORONTO, ON, M5G1G6

APPROXIMATE DURATION  
JULY 2026  
TO  
SEPTEMBER 2027

LOGISTICS PLAN  
CONSTRUCTION

LP-3

NOT TO SCALE