



**Reassessment of Asbestos-Containing
Building Materials
Forensic Identification unit & Radio and
Electronic Services
2050 Jane Street A and B
Toronto, Ontario**



Prepared for:
The City of Toronto
Corporate Services
Facilities Management
55 John Street, 2nd Floor, Toronto, ON

Attention: Beverley Hubbard

Pinchin File 83714.003

November 15, 2013

© Pinchin Environmental Ltd.

TABLE OF CONTENTS

1.0	INTRODUCTION AND REGULATORY REQUIREMENTS.....	1
1.1	Introduction and Scope.....	1
2.0	SURVEY METHODOLOGY	1
2.1	General Approach.....	1
2.2	Asbestos Survey Methodology.....	1
3.0	FINDINGS AND RECOMMENDATIONS.....	2
3.1	Findings	2
3.2	Recommendations	3
4.0	CORRECTIVE ACTIONS	3
5.0	LIMITATIONS.....	3
6.0	CLOSING	5
Appendix I	Asbestos Reassessment Survey Form	
Appendix II	Results of Bulk Sample Analysis for Asbestos	
Appendix III	Corrective Actions Inspection Reports	
Appendix IV	Survey Drawings	

1.0 INTRODUCTION AND REGULATORY REQUIREMENTS

1.1 Introduction and Scope

Pinchin Environmental Ltd. (Pinchin) was retained by the City of Toronto, Facilities Management (Client) to conduct a reassessment survey of previously identified asbestos-containing building materials in the Forensic Identification Unit and Radio and Electronic Services buildings located at 2050 Jane Street A and B in Toronto, Ontario.

The objective of the survey was to determine the condition of previously identified asbestos-containing materials (ACM) and, if necessary, provide recommendations to fulfil requirements set forth under the Ontario Occupational Health and Safety Act to meet regulatory compliance. This document should be filed as an addendum to the original survey, which was conducted by ECOH Environmental Inc on November 17, 2005.

The asbestos reassessment survey report is for management purposes only. It is not intended to be used to establish the asbestos content of building materials prior to demolition or renovation activities. Prior to any work activities that may disturb building materials; a pre-renovation audit of the work area for hazardous materials should be conducted.

Jason Borowski of Pinchin performed the fieldwork on June 4, 2013.

2.0 SURVEY METHODOLOGY

2.1 General Approach

To ensure familiarity with the building, the surveyor(s) made reference to the previous assessment and reassessment reports provided by the City of Toronto prior to commencing the asbestos reassessment survey. The surveyor also made reference to facility floor plans included in the previous assessment reports, or provided independently by the City of Toronto. Facility drawings with locations of known asbestos-containing materials, if present, are included in Appendix IV.

2.2 Asbestos Survey Methodology

The City of Toronto provided the consultant with a Reassessment Survey Form. Prior to conducting the reassessment survey, the form was reviewed by Pinchin and updated with all available information regarding ACM, including that from past assessments and reassessments.

The surveyor(s) conducted a visual reassessment of all known and assumed asbestos-containing materials in all accessible areas of the building, as detailed in past survey reports and the Reassessment Survey Form, and recorded the condition (GOOD, FAIR or POOR) of each known or assumed ACM on the Reassessment Survey Form. The surveyor(s) also recorded detailed

descriptions of previously-unidentified potential ACM, if observed. Please refer to Appendix I for the updated Reassessment Survey Form.

Materials confirmed to be asbestos-containing during previous assessments were not sampled for this reassessment survey. Additionally, samples were not collected of materials that were previously confirmed to be non-asbestos by the requirements of Ontario Regulation 278/05.

Non-friable materials (including plaster, drywall joint compound, vinyl floor tiles, mastics, window caulking) were not sampled unless damaged or otherwise deemed necessary by the surveyor(s) or the City of Toronto, and were assumed to be asbestos-containing.

Any other potentially asbestos-containing materials noted during the reassessment that had not been identified in a previous survey, or were not sampled in accordance with the requirements of O. Reg. 278/05, were sampled as part of the reassessment.

3.0 FINDINGS AND RECOMMENDATIONS

3.1 Findings

Previously identified assumed or confirmed ACM include the following:

- Roofing
- Caulking
- Vinyl floor tiles
- Vinyl sheet flooring
- Drywall joint compound
- Acoustic ceiling tiles
- Transite pipe
- White duct mastic
- Grey duct mastic

All assumed and/or confirmed ACM were observed to be in GOOD condition at the time of the reassessment.

Unless previously determined to be non-asbestos, plaster, drywall joint compound, vinyl floor tiles, mastics and window caulking in other areas of the facility should continue to be assumed to be asbestos-containing, and should be sampled prior to renovation and/or demolition activities

3.2 Recommendations

All assumed and / or confirmed ACM were observed in GOOD condition at the time of the reassessment. Therefore, no recommended corrective actions are made at this time.

Ontario Ministry of Labour Regulation 278/05 requires that an Asbestos Management Program (AMP) be implemented as long as asbestos-containing materials are present in a building. The AMP, original survey report and subsequent reassessment reports must be available at the work place, and must identify the type of asbestos, and where asbestos can be found on a room-by-room basis.

Interpretation of all sources of asbestos-related information, including but not limited to the original asbestos survey report, asbestos reassessment reports, room-by-room survey data, survey drawings and reports from previous asbestos abatement projects, should be completed by a competent person trained in the historical application of asbestos in building materials, building design and preferably by a person with site-specific knowledge and/or experience.

Information contained within any of the above-noted sources may not relieve the Regulatory responsibility of building Owners, or project Employers/Constructors, to complete a detailed site inspection prior to commencement of a project.

This report should not be used as a substitute for a detailed site inspection to identify asbestos-containing building materials, which must be specifically tailored to the scope and nature of any given project, and completed prior to any maintenance, renovation or demolition work that may cause disturbance to building materials.

4.0 CORRECTIVE ACTIONS

No deficiencies were observed during the reassessment.

5.0 LIMITATIONS

This report details the ACM found within or forming part of the building envelope. The assessment only included inspections of the structure and finishes, including equipment. The assessment did not include inspection of current or past owner or occupant articles within the building (i.e. process materials or equipment, portable equipment, curriculum items, etc.) and does not report on possible contaminants in the soil and groundwater of the site, underground storage tanks, buried piping, inside drums, vessels, production equipment, or in areas not accessed by the surveyor.

The work performed by Pinchin was conducted in accordance with generally accepted engineering or scientific practices current in this geographical area at the time the work was performed. The Client acknowledges that subsurface and concealed conditions may vary from those encountered or inspected. Pinchin can only comment on the environmental conditions

observed on the date(s) the assessment is performed. The work is limited to those materials or areas of concern identified by the Client or outlined in our proposal. Other areas of concern may exist but were not investigated within the scope of this assignment.

Pinchin makes no other representations whatsoever, including those concerning the legal significance of its findings, or as to other legal matters touched on in this report, including, but not limited to, ownership of any property, or the application of any law to the facts set forth herein. With respect to regulatory compliance issues, regulatory statutes are subject to interpretations and these interpretations may change over time and we undertake no, and expressly disclaim, obligation to advise the Client of such change. Pinchin accepts no responsibility for consequential financial effects on transactions or property values, or requirements for follow-up actions and costs.

No warranty is either expressed or implied, or intended by this agreement or by furnishing oral or written reports or findings. The liability of Pinchin or our officers, directors, shareholders or staff will be limited to \$1,000,000. Pinchin will not be responsible for any consequential or indirect damages. Pinchin will only be liable for damages resulting from negligence of Pinchin. Pinchin will not be liable for any losses or damage if client has failed, within a period of (2) years following the date upon which the claim is discovered within the meaning of the Limitations Act, 2002 (Ontario), to commence legal proceedings against Consultant to recover such losses or damage.

Information provided by Pinchin is intended for Client use only. Pinchin will not provide results or information to any party other than the Client, unless the Client, in writing, requests information to be provided to a third party or unless disclosure by Pinchin is required by law. Unless consented to by Pinchin, which consent may be reasonably and/or arbitrarily withheld, any use by a third party, of reports or documents authored by Pinchin, or any reliance by a third party on or decisions made by a third party based on the findings described in said documents, is the sole responsibility of such third parties. Pinchin accepts no responsibility for damages suffered by any third party as a result of decisions made or actions conducted by any party.

6.0 CLOSING

Should there be any questions regarding the contents of this report, please contact Thong Nguyen of Pinchin at (905) 363-1424.

Yours truly,

Pinchin Environmental Ltd.

Prepared by:

Reviewed by:

Original signed by...

Original signed by...

per: Jason Borowski
Senior Project Technologist
Hazardous Materials Group
jborowski@pinchin.com

per: Jeff Lainsbury
Manager
Hazardous Materials Group
jlainsbury@pinchin.com

Reviewed by:

Original signed by...

per: Thong Nguyen, EP
Project Manager
Hazardous Materials Group
txnguyen@pinchin.com

J:\83000s\83714 CofTor,VariousLocations,Toronto,REASM\83714.003 CofTor,PoliceFac,Toronto,ASB,REASM\FacilitiesJane Street - 2050\2050 Jane Street A\2013 Report\2050 Jane Street (A) ACM Reassessment 2013.docx

APPENDIX I
ASBESTOS REASSESSMENT SURVEY FORM

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

Building Address		2050 Jane Street A and B, North York, Ontario		Date(s) of Current Reassessment:		June 4, 2013		
Building Name		Forensic Identification Unit and Radio and Electronic Services		Organization completing Asbestos Reassessment:		Pinchin Environmental Ltd.		
Original Survey Conducted By:		ECOH Environmental Inc		Name of surveyor:		Jason Borowski		
Date(s) of Original Survey:		November 17, 2005		Signature of surveyor:				
Summary of Findings								
Location Number	Location Name	System	Potential ACM Observed	Sample ID	Asbestos Type/Content	Quantity	Condition	Notes/Required Action
Jane Street A								
0-00	Exterior	Roof	Roofing Material	Not Sampled	ACM Assumed	200 m2	Good	
0-00	Exterior	Walls	Caulking	Not Sampled	ACM Assumed	20 m2	Good	
0-00	Exterior	Windows	Window Caulking	Not Sampled	ACM Assumed	20 m2	Good	
1-001	Second Floor Mechanical Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-001	Second Floor Mechanical Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-001	Second Floor Mechanical Room	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-002	Mezzanine above Car Bay 1	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-002	Mezzanine above Car Bay 1	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-002	Mezzanine above Car Bay 1	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-003	Mezzanine above Car Bay 2	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-003	Mezzanine above Car Bay 2	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-003	Mezzanine above Car Bay 2	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-005	Stairwell	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	15 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-005	Stairwell	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-005	Stairwell	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-006	Corridor	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	100 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-006	Corridor	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-006	Corridor	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-006	Corridor	Structure	Sprayed Fireproofing	11087-B08-04 to 06	None Detected	N/A	N/A	
1-007	Sprinkler Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-007	Sprinkler Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-007	Sprinkler Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-007	Sprinkler Room	Duct	Mastic	Not Sampled	ACM Presumed	1 m2	Good	White
1-007	Sprinkler Room	Duct	Mastic	Not Sampled	ACM Presumed	1 m2	Good	Grey
1-007	Sprinkler Room	Structure	Sprayed Fireproofing	11087-B08-04 to 06	None Detected	N/A	N/A	
1-008	Class Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-008	Class Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-008	Class Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-009	Mechanical Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	5 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-010	Mechanical Closet	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	5 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-010	Mechanical Closet	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-010	Mechanical Closet	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-011	Quite Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-011	Quite Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-011	Quite Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-012	Caretaker Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	8 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-012	Caretaker Office	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-012	Caretaker Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-013	Corridor	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	40 m2	Good	VSF-01, mixed shades of green
1-013	Corridor	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-013	Corridor	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-014	Storage Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	8 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-014	Storage Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-014	Storage Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-015	Negative Pressure Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-015	Negative Pressure Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-015	Negative Pressure Room	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-016	Waste Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-016	Waste Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-016	Waste Room	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-017	Storage Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-017	Storage Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-017	Storage Room	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-018	Entrance	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	2 m2	Good	VSF-01, mixed shades of green
1-018	Entrance	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-018	Entrance	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-019	Lab Entrance	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-019	Lab Entrance	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-019	Lab Entrance	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-020	Car Bay 1	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-020	Car Bay 1	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-020	Car Bay 1	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-021	Car Bay 2	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-021	Car Bay 2	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-021	Car Bay 2	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-022	Body Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-022	Body Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-022	Body Room	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-023	Storage Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-023	Storage Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-023	Storage Room	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-024	Triage	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	20 m2	Good	VSF-01, mixed shades of green
1-024	Triage	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-024	Triage	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-025	Finger Print Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	20 m2	Good	VSF-02, mixed shades of blue.
1-025	Finger Print Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-025	Finger Print Room	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-026	Lab	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	10 m2	Good	VSF-02, mixed shades of blue.

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-026	Lab	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-026	Lab	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-027	Corridor	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	10 m2	Good	VSF-02, mixed shades of blue.
1-027	Corridor	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-027	Corridor	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-028	Evidence Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	15 m2	Good	VSF-02, mixed shades of blue.
1-028	Evidence Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-028	Evidence Room	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-029	Closet	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-029	Closet	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-029	Closet	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-030	Evidence Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	15 m2	Good	VSF-02, mixed shades of blue.
1-030	Evidence Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-030	Evidence Room	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-031	Document Section	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	15 m2	Good	VSF-02, mixed shades of blue.
1-031	Document Section	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-031	Document Section	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-032	Shift Personal	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	15 m2	Good	VSF-02, mixed shades of blue.
1-032	Shift Personal	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-032	Shift Personal	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-033	Closet	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-033	Closet	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

Location Number	Location Name	System	Potential ACM Observed	Sample ID	Asbestos Type/Content	Quantity	Condition	Notes/Required Action
1-033	Closet	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-034	Corridor	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	1250 m2	Good	VSF-01, mixed shades of green
1-034	Corridor	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-034	Corridor	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-035	fire Suppression Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	5 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-035	fire Suppression Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-035	fire Suppression Room	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-036	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-036	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-036	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-037	Photo Lab	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-037	Photo Lab	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-037	Photo Lab	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-038	Computer Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-038	Computer Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-038	Computer Room	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-039	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-039	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-039	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-040	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-040	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-040	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-041	AFIS Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-041	AFIS Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-041	AFIS Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-042	Corridor	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-042	Corridor	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-042	Corridor	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-043	Finger Print Storage	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	5 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-043	Finger Print Storage	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-043	Finger Print Storage	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-044	Corridor	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	10 m2	Good	VSF-01, mixed shades of green
1-044	Corridor	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-044	Corridor	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-045	Lamination Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	15 m2	Good	VSF-03, beige with black streaks.
1-045	Lamination Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-045	Lamination Room	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-046	Printing Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	80 m2	Good	VSF-03, beige with black streaks.
1-046	Printing Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-046	Printing Room	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-047	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-047	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-047	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-048	Storage Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	5 m2	Good	VSF-01, mixed shades of green

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

Location Number	Location Name	System	Potential ACM Observed	Sample ID	Asbestos Type/Content	Quantity	Condition	Notes/Required Action
1-048	Storage Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-048	Storage Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-049	Film Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	15 m2	Good	VSF-01, mixed shades of green
1-049	Film Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-049	Film Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-050	Photo Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	5 m2	Good	VSF-02, mixed shades of blue.
1-050	Photo Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-050	Photo Room	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-051	Photo Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	5 m2	Good	VSF-02, mixed shades of blue.
1-051	Photo Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-051	Photo Room	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-052	Storage Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	5 m2	Good	VSF-02, mixed shades of blue.
1-052	Storage Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-052	Storage Room	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-053	Corridor	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	100 m2	Good	VSF-01, mixed shades of green
1-053	Corridor	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-053	Corridor	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-054	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-054	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-054	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-055	Office	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	100 m2	Good	VSF-01, mixed shades of green
1-055	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-055	Office	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-056	Quality Control	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	20 m2	Good	VSF-01, mixed shades of green
1-056	Quality Control	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-056	Quality Control	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-056	Quality Control	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-057	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-057	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-057	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-058	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-058	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-058	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-059	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-059	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-059	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-060	Washroom	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic
1-060	Washroom	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-060	Washroom	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-061	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-061	Office	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-061	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-062	Storage Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-062	Storage Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-062	Storage Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-063	Entrance	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic
1-063	Entrance	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-063	Entrance	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-064	Storage Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	5 m2	Good	VFT-02, 12"x12" mixed shades of brown
1-064	Storage Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-064	Storage Room	Ceiling	Acoustic Ceiling Tiles (ACT)	2009 Sampled 1 to 3	None Detected	N/A	N/A	ACT-02, 2'x4' random dimple and hole
1-065	Office Area	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	150 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-065	Office Area	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-065	Office Area	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-066	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	10 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-066	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-066	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-67	Phone Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-67	Phone Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-67	Phone Room	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-67	Phone Room	Duct	Mastic	Not Sampled	ACM Presumed	2 sf	Good	White
1-068	Gun Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	10 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-068	Gun Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-068	Gun Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-069	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-069	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

Location Number	Location Name	System	Potential ACM Observed	Sample ID	Asbestos Type/Content	Quantity	Condition	Notes/Required Action
1-069	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-070	Storage Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	10 m2	Good	VSF-01, mixed shades of green
1-070	Storage Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-070	Storage Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-071	Storage Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	10 m2	Good	VSF-01, mixed shades of green
1-071	Storage Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-071	Storage Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-072	Gym	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	150 sf	Good	VFT-01, 12"x12" mixed shades of beige.
1-072	Gym	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-072	Gym	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-073	Storage Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	10 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-073	Storage Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-073	Storage Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-074	Lunch Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	20 m2	Good	VSF-05, mixed shades of orange
1-074	Lunch Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-074	Lunch Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-075	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-075	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-075	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-076	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-076	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-076	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

Location Number	Location Name	System	Potential ACM Observed	Sample ID	Asbestos Type/Content	Quantity	Condition	Notes/Required Action
1-077	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-077	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-077	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-078	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-078	Office	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-078	Office	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-079	Copy Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-079	Copy Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-079	Copy Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-080	Supply Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	10 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-080	Supply Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-080	Supply Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-081	Women's Locker Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	20 m2	Good	VSF-01, mixed shades of green
1-081	Women's Locker Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-081	Women's Locker Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-082	Women's Washroom	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic
1-082	Women's Washroom	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-082	Women's Washroom	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-083	Men's Locker Room	Floor	Vinyl Sheet Flooring (VSF)	Not Sampled	ACM Presumed	40 m2	Good	VSF-01, mixed shades of green
1-083	Men's Locker Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-083	Men's Locker Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-084	Men's Washroom	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-084	Men's Washroom	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-084	Men's Washroom	Ceiling	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-085	Property Storage	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	10 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-085	Property Storage	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-085	Property Storage	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-086	Electrical Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-086	Electrical Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-086	Electrical Room	Duct	Mastic	Not Sampled	ACM Presumed	1 m2	Good	White
1-087	SGT's Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	10 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-087	SGT's Room	Walls	Drywall Joint Compound (DJC)	2009 Sample 4 to 7	None Detected	N/A	N/A	
1-087	SGT's Room	Ceiling	Acoustic Ceiling Tiles (ACT)	11087-B08-01 to 03	None Detected	N/A	N/A	ACT-01, 2'x4' random pinhole pattern
1-088	Evidence Handling Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	30 m2	Good	
1-088	Evidence Handling Room	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Presumed	60 m2	Good	
1-088	Evidence Handling Room	Ceiling	Drywall Joint Compound (DJC)	Not Sampled	ACM Presumed	30 m2	Good	
1-089	Evidence Handling Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Presumed	30 m2	Good	VFT-01, 12"x12" mixed shades of beige.
1-089	Evidence Handling Room	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Presumed	60 m2	Good	
1-089	Evidence Handling Room	Ceiling	Drywall Joint Compound (DJC)	Sampled 2012 - 0001A-C		30 m2	Good	

Jane Street B

0-00	Exterior	Roof	Roofing Material	Not Sampled	ACM Assumed	20 m2	Good	
0-00	Exterior	Windows	Window Caulking	Not Sampled	ACM Assumed	2 m2	Good	
1-001	Car Bay	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-001	Car Bay	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-001	Car Bay	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-001	Car Bay	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-002	Stairwell	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	8 m2	Good	VFT-01, 12"x12" brown with white and beige smears.
1-002	Stairwell	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	40 m2	Good	
1-002	Stairwell	Ceiling	Acoustic Ceiling Tiles	11087-B09-09 to 11	None Detected			ACT-01, 2'x4' random holes
1-002	Stairwell	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-003	Telecom Stock Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	25 m2	Good	VFT-02, 24"x24" marble pattern.
1-003	Telecom Stock Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-003	Telecom Stock Room	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-003	Telecom Stock Room	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-004	Elevator	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-004	Elevator	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-004	Elevator	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-005	Corridor	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	20 m2	Good	VFT-01, 12"x12" brown with white and beige smears.
1-005	Corridor	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	60 m2	Good	
1-005	Corridor	Ceiling	Acoustic Ceiling Tiles	11087-B09-09 to 11	None Detected			ACT-01, 2'x4' random holes
1-005	Corridor	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-006	Stock Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	15 m2	Good	VFT-02, 24"x24" marble pattern.
1-006	Stock Room	Ceiling	Acoustic Ceiling Tiles	11087-B09-09 to 11	None Detected			ACT-01, 2'x4' random holes
1-006	Stock Room	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-007	Service Floor	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-008	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-008	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	40 m2	Good	
1-008	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	12 m2	Good	ACT-02, 2'x4' random fleck and hole.
1-008	Office	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-009	Washroom	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic
1-009	Washroom	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	40 m2	Good	
1-009	Washroom	Ceiling	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	8 m2	Good	*No access above ceiling
1-010	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	10 m2	Good	VFT-01, 12"x12" brown with white and beige smears.
1-010	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	40 m2	Good	
1-010	Office	Ceiling	Acoustic Ceiling Tiles	11087-B09-09 to 11	None Detected			ACT-01, 2'x4' random holes
1-010	Office	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-011	Repair Services	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-011	Repair Services	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	60 m2	Good	
1-011	Repair Services	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	20 m2	Good	ACT-03, 2'x4' random dimple and hole.
1-011	Repair Services	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-012	Chiller Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	8 m2	Good	VFT-03, 12"x12" white with black streaks.
1-012	Chiller Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-012	Chiller Room	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-013	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	10 m2	Good	VFT-02, 24"x24" marble pattern.
1-013	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	40 m2	Good	
1-013	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	10 m2	Good	ACT-03, 2'x4' random dimple and hole.
1-013	Office	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-014	Telephone Room		No Access					

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-015	Corridor	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-015	Corridor	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	50 m2	Good	
1-015	Corridor	Ceiling	Acoustic Ceiling Tiles	11087-B09-09 to 11	None Detected			ACT-01, 2'x4' random holes
1-015	Corridor	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-016	Stairwell	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	15 m2	Good	VFT-04, 12"x12" mixed shades of beige.
1-016	Stairwell	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	55 m2	Good	
1-016	Stairwell	Ceiling	Acoustic Ceiling Tiles	11087-B09-09 to 11	None Detected			ACT-01, 2'x4' random holes
1-017	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	75 sf	Good	VFT-01, 12"x12" brown with white and beige smears.
1-017	Office	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-017	Office	Ceiling	Acoustic Ceiling Tiles	11087-B09-09 to 11	None Detected			ACT-01, 2'x4' random holes
1-017	Office	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
2-001	Training Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	20 m2	Good	VFT-02, 24"x24" marble pattern.
2-001	Training Room	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	60 m2	Good	
2-001	Training Room	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	20 m2	Good	ACT-03, 2'x4' random dimple and hole.
2-002	Corridor	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	100 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-002	Corridor	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	200 m2	Good	
2-002	Corridor	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	100 m2	Good	ACT-02, 2'x4' random fleck and hole.
2-003	Lunch Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	30 m2	Good	VFT-01, 12"x12" brown with white and beige smears.
2-003	Lunch Room	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	65 m2	Good	
2-003	Lunch Room	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	30 m2	Good	ACT-02, 2'x4' random fleck and hole.
2-004	Men's Washroom	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic
2-004	Men's Washroom	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	80 m2	Good	

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

Location Number	Location Name	System	Potential ACM Observed	Sample ID	Asbestos Type/Content	Quantity	Condition	Notes/Required Action
2-004	Men's Washroom	Ceiling	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	25 m2	Good	
2-005	Janitor Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
2-005	Janitor Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
2-005	Janitor Room	Ceiling	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	4 m2	Good	
2-006	Women's Washroom	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic
2-006	Women's Washroom	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	60 m2	Good	
2-006	Women's Washroom	Ceiling	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	15 m2	Good	
2-007	Copy Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	20 m2	Good	VFT-05, 12"x12" Black with white streaks.
2-007	Copy Room	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	45 m2	Good	
2-007	Copy Room	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	20 m2	Good	ACT-02, 2'x4' random fleck and hole.
2-008	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	20 m2	Good	VFT-06, 12"x12" beige with black and white streaks.
2-008	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	45 m2	Good	
2-008	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	20 m2	Good	ACT-02, 2'x4' random fleck and hole.
2-009	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	20 m2	Good	VFT-06, 12"x12" beige with black and white streaks.
2-009	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	45 m2	Good	
2-009	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	20 m2	Good	ACT-02, 2'x4' random fleck and hole.
2-010	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	20 m2	Good	VFT-02, 24"x24" marble pattern.
2-010	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	60 m2	Good	
2-010	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	20 m2	Good	ACT-03, 2'x4' random dimple and hole.
2-011	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	20 m2	Good	VFT-02, 24"x24" marble pattern.
2-011	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	60 m2	Good	
2-011	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	20 m2	Good	ACT-03, 2'x4' random dimple and hole.

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
2-012	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
2-012	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	40 m2	Good	
2-012	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	15 m2	Good	ACT-03, 2'x4' random dimple and hole.
2-013	Repair Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	25 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-013	Repair Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	10 m2	Good	
2-013	Repair Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	25 m2	Good	ACT-02, 2'x4' random fleck and hole.
2-014	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	10 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-014	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	30 m2	Good	
2-014	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	10 m2	Good	ACT-02, 2'x4' random fleck and hole.
2-015	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	10 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-015	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	30 m2	Good	
2-015	Office	Ceiling	Acoustic Ceiling Tiles	11087-B09-09 to 11	None Detected			ACT-01, 2'x4' random holes
1-018	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	10 m2	Good	VFT-04, 12"x12" mixed shades of beige.
1-018	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	30 m2	Good	
1-018	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	10 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
1-019	Front Desk	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	30 m2	Good	VFT-04, 12"x12" mixed shades of beige.
1-019	Front Desk	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	80 m2	Good	
1-019	Front Desk	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	30 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
1-020	Corridor	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
1-020	Corridor	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	100 m2	Good	
1-020	Corridor	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	100 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
1-021	Stairwell	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	15 m2	Good	VFT-04, 12"x12" mixed shades of beige.

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-021	Stairwell	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-021	Stairwell	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	15 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
1-022	Women's Washroom	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic
1-022	Women's Washroom	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	90 m2	Good	
1-022	Women's Washroom	Ceiling	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	40 m2	Good	
1-023	Janitor Closet	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic
1-023	Janitor Closet	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-023	Janitor Closet	Ceiling	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	5 m2	Good	
1-024	Men's Washroom	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic
1-024	Men's Washroom	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	150 m2	Good	
1-024	Men's Washroom	Ceiling	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	50 m2	Good	
1-025	Lunch Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	20 m2	Good	VFT-04, 12"x12" mixed shades of beige.
1-025	Lunch Room	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	60 m2	Good	
1-025	Lunch Room	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	20 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
1-026	Shop	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-026	Shop	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-026	Shop	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-026	Shop	Piping	Transite	Not Sampled	ACM Assumed	20 m2	Good	
1-026	Shop	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-027	File Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-027	File Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-027	File Room	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-028	Machine Shop	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-028	Machine Shop	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-028	Machine Shop	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-029	Compressor Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-029	Compressor Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-029	Compressor Room	Ceiling	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	10 m2	Good	
1-030	Truck Wash Bay	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-030	Truck Wash Bay	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-030	Truck Wash Bay	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-030	Truck Wash Bay	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-031	Clothing Storage	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	40 m2	Good	VFT-04, 12"x12" mixed shades of beige.
1-031	Clothing Storage	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-031	Clothing Storage	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-031	Clothing Storage	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-032	Tire Storage	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-032	Tire Storage	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-032	Tire Storage	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-033	Clothing Storage	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	50 m2	Good	VFT-04, 12"x12" mixed shades of beige.
1-033	Clothing Storage	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-033	Clothing Storage	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-033	Clothing Storage	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-034	Washroom	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-034	Washroom	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Ceramic
1-034	Washroom	Ceiling	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	10 m2	Good	
1-035	Corridor	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-035	Corridor	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-035	Corridor	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-035	Corridor	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-036	Storage	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	10 m2	Good	VFT-07, 12"x12" brown with white streaks.
1-036	Storage	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-036	Storage	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-036	Storage	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-037	Quick Service Garage	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-037	Quick Service Garage	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-037	Quick Service Garage	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-038	Parts Counter	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	10 m2	Good	VFT-04, 12"x12" mixed shades of beige.
1-038	Parts Counter	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-039	Parts Storage	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	120 m2	Good	VFT-04, 12"x12" mixed shades of beige.
1-039	Parts Storage	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-040	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	20 m2	Good	VFT-04, 12"x12" mixed shades of beige.
1-040	Office	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-040	Office	Ceiling	Acoustic Ceiling Tiles	11087-B09-09 to 11	None Detected			ACT-01, 2'x4' random holes
1-041	Stairwell	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-041	Stairwell	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-041	Stairwell	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-042	Fitting Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-042	Fitting Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-042	Fitting Room	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-042	Fitting Room	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
1-043	Tailor Shop	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
1-043	Tailor Shop	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
1-043	Tailor Shop	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
1-043	Tailor Shop	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
2-016	Stairwell	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	10 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-016	Stairwell	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	5 m2	Good	VFT-07, 12"x12" brown with white streaks.
2-016	Stairwell	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	80 m2	Good	
2-016	Stairwell	Ceiling	Acoustic Ceiling Tiles	11087-B09-09 to 11	None Detected			ACT-01, 2'x4' random holes
2-017	Corridor	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	100 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-017	Corridor	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
2-017	Corridor	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	100 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
2-018	Unit Commander	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
2-018	Unit Commander	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	60 m2	Good	
2-018	Unit Commander	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	20 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
2-019	Clerks Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	15 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-019	Clerks Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	40 m2	Good	
2-019	Clerks Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	15 m2	Good	ACT-04, 2'x4' width wise fissure and hole.

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>System</i>	<i>Potential ACM Observed</i>	<i>Sample ID</i>	<i>Asbestos Type/Content</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
2-020	Lunch Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	10 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-020	Lunch Room	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	35 m2	Good	
2-020	Lunch Room	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	10 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
2-021	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
2-021	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	35 m2	Good	
2-021	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	10 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
2-022	Admin Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	10 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-022	Admin Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	35 m2	Good	
2-022	Admin Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	10 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
2-023	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
2-023	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	40 m2	Good	
2-023	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	15 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
2-024	Meeting Room	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	30 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-024	Meeting Room	Walls	Drywall Joint Compound (DJC)	Sampled 2012 - A0001A-C	None Detected	70 m2	Good	
2-024	Meeting Room	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	30 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
2-025	Office	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	20 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-025	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	50 m2	Good	
2-025	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	20 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
2-026	Gym	Floor	Vinyl Floor Tiles (VFT)	Not Sampled	ACM Assumed	40 m2	Good	VFT-04, 12"x12" mixed shades of beige.
2-026	Gym	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	60 m2	Good	
2-026	Gym	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	40 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
2-026	Gym	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			

APPENDIX I - ASBESTOS REASSESSMENT SURVEY FORM

Location Number	Location Name	System	Potential ACM Observed	Sample ID	Asbestos Type/Content	Quantity	Condition	Notes/Required Action
2-027	Office	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
2-027	Office	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	60 m2	Good	
2-027	Office	Ceiling	Acoustic Ceiling Tiles	Not Sampled	ACM Assumed	30 m2	Good	ACT-04, 2'x4' width wise fissure and hole.
2-028	Quite Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Carpet
2-028	Quite Room	Walls	Drywall Joint Compound (DJC)	Not Sampled	ACM Assumed	30 m2	Good	
2-028	Quite Room	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
2-029	Storage Room	Floor	N/A	N/A	No Potential ACM Identified	N/A	N/A	Concrete
2-029	Storage Room	Walls	N/A	N/A	No Potential ACM Identified	N/A	N/A	Block
2-029	Storage Room	Ceiling	N/A	N/A	No Potential ACM Identified	N/A	N/A	Steel
2-029	Storage Room	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
2-030	Storage Room	Structure	Sprayed Fireproofing	11087-B09-01 to 05	None Detected			
Surveyor's Field Notes								

APPENDIX II
RESULTS OF BULK SAMPLE ANALYSIS FOR ASBESTOS
(NO INFORMATION TO REPORT)

APPENDIX III
CORRECTIVE ACTIONS INSPECTION REPORTS
(NO INFORMATION TO REPORT)

APPENDIX IV
SURVEY DRAWINGS



LEGEND



FRIABLE/SEMI-FRIABLE ASBESTOS
CONTAINING MATERIAL



NON-FRIABLE ASBESTOS CONTAINING
MATERIAL

1-01

LOCATION NUMBER

NAR

NO ACCESS TO ROOM



THE DRAWING DOES NOT ILLUSTRATE LOCATIONS OF DRYWALL JOINT COMPOUND, PLASTER, WINDOW CAULKING OR ROOFING MATERIALS, FOR REASONS AS DISCUSSED IN SECTION 6 OF THE STANDARD OPERATING PROCEDURE FOR ASBESTOS REASSESSMENT SURVEYS. PLEASE REFER TO THE ASBESTOS REASSESSMENT SURVEY FORM IN APENDIX I FOR INFORMATION REGARDING THE LOCATIONS AND ASBESTOS CONTENT OF THESE MATERIALS.

FIGURE 1 OF 4

LOCATION:

2050 JANE STREET A,
NORTH YORK, ONTARIO

BUILDING NAME:

FORENSIC IDENTIFICATION UNIT

GROUND FLOOR PLAN
ASBESTOS-CONTAINING MATERIAL LOCATIONS

CLIENT			CITY OF TORONTO		
PROJECT NUMBER:	DATE:	NOVEMBER 2013	DRW BY:	J.B.	
PINCHIN FILE NUMBER	SCALE:	NOT TO SCALE	CHK BY:	M.S.	
83714.003					





LEGEND



FRIABLE/SEMI-FRIABLE ASBESTOS
CONTAINING MATERIAL



NON-FRIABLE ASBESTOS CONTAINING
MATERIAL

1-01

LOCATION NUMBER

NAR

NO ACCESS TO ROOM

THE DRAWING DOES NOT ILLUSTRATE LOCATIONS OF DRYWALL JOINT COMPOUND, PLASTER, WINDOW CAULKING OR ROOFING MATERIALS, FOR REASONS AS DISCUSSED IN SECTION 6 OF THE STANDARD OPERATING PROCEDURE FOR ASBESTOS REASSESSMENT SURVEYS. PLEASE REFER TO THE ASBESTOS REASSESSMENT SURVEY FORM IN APENDIX I FOR INFORMATION REGARDING THE LOCATIONS AND ASBESTOS CONTENT OF THESE MATERIALS.

FIGURE 2 OF 4

LOCATION:


2050 JANE STREET
NORTH YORK, ONTARIO

BUILDING NAME:


RADIO AND ELECTRONIC SERVICES

WEST SIDE FLOOR PLAN
ASBESTOS-CONTAINING MATERIAL LOCATIONS

CLIENT			
CITY OF TORONTO			
PROJECT NUMBER:	DATE: NOVEMBER 2013	DRW BY: J.B.	
PINCHIN FILE NUMBER	SCALE: NOT TO SCALE	CHK BY: M.S.	
83714.003			

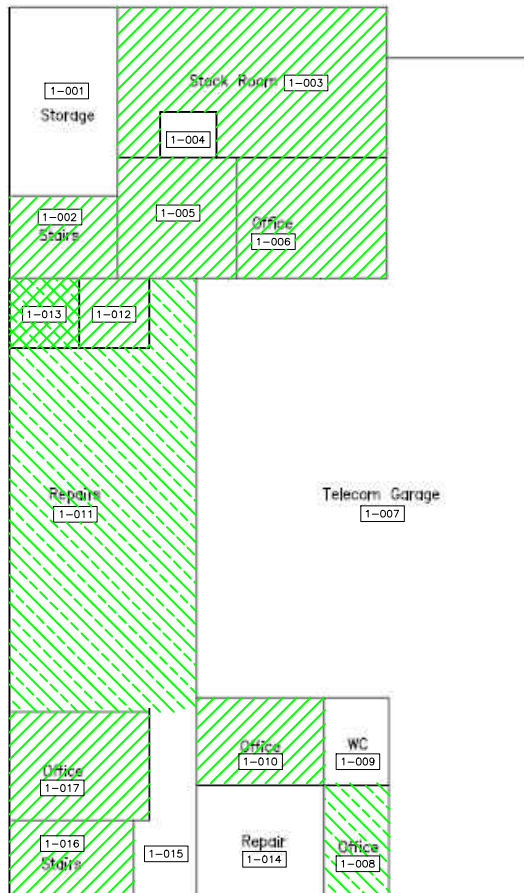

GROUND
FLOOR

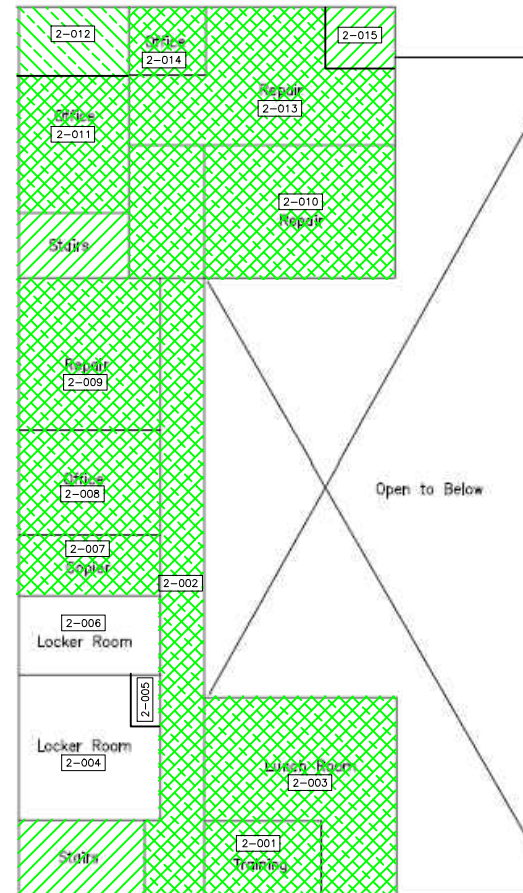

SECOND
FLOOR



LEGEND



FRIABLE/SEMI-FRIABLE ASBESTOS
CONTAINING MATERIAL




NON-FRIABLE ASBESTOS CONTAINING
MATERIAL

1-01

LOCATION NUMBER

NAR

NO ACCESS TO ROOM

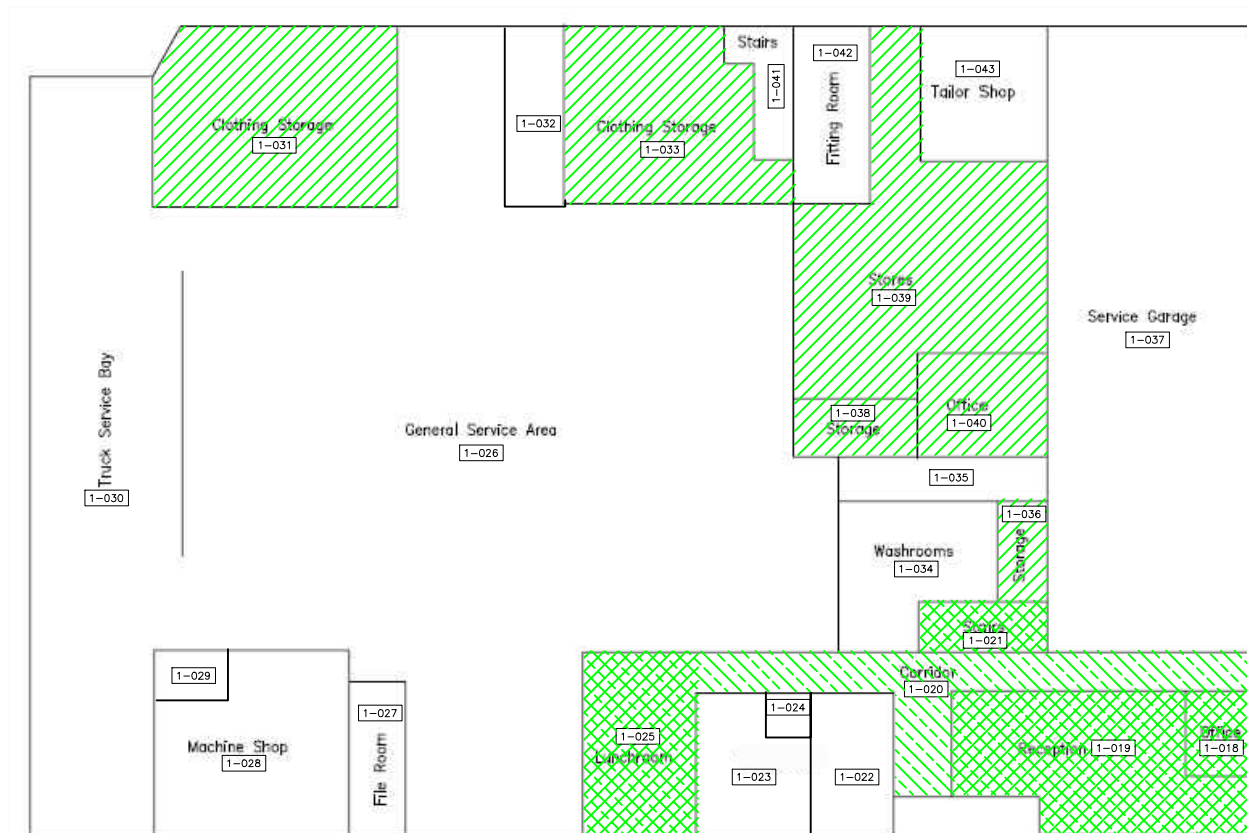

THE DRAWING DOES NOT ILLUSTRATE LOCATIONS OF DRYWALL JOINT COMPOUND, PLASTER, WINDOW CAULKING OR ROOFING MATERIALS, FOR REASONS AS DISCUSSED IN SECTION 6 OF THE STANDARD OPERATING PROCEDURE FOR ASBESTOS REASSESSMENT SURVEYS. PLEASE REFER TO THE ASBESTOS REASSESSMENT SURVEY FORM IN APENDIX I FOR INFORMATION REGARDING THE LOCATIONS AND ASBESTOS CONTENT OF THESE MATERIALS.

FIGURE 3 OF 4

LOCATION:

2050 JANE STREET
NORTH YORK, ONTARIO

BUILDING NAME:

RADIO AND ELECTRONIC SERVICES

EAST GROUND FLOOR PLAN
ASBESTOS-CONTAINING MATERIAL LOCATIONS

CLIENT			CITY OF TORONTO		
PROJECT NUMBER:	DATE:	NOVEMBER 2013	DRW BY:	J. B.	
PINCHIN FILE NUMBER	SCALE:	NOT TO SCALE	CHK BY:	M. S.	
83714.003					





LEGEND



FRIABLE/SEMI-FRIABLE ASBESTOS
CONTAINING MATERIAL



NON-FRIABLE ASBESTOS CONTAINING
MATERIAL

1-01

LOCATION NUMBER

NAR

NO ACCESS TO ROOM

THE DRAWING DOES NOT ILLUSTRATE LOCATIONS OF DRYWALL JOINT COMPOUND, PLASTER, WINDOW CAULKING OR ROOFING MATERIALS, FOR REASONS AS DISCUSSED IN SECTION 6 OF THE STANDARD OPERATING PROCEDURE FOR ASBESTOS REASSESSMENT SURVEYS. PLEASE REFER TO THE ASBESTOS REASSESSMENT SURVEY FORM IN APENDIX I FOR INFORMATION REGARDING THE LOCATIONS AND ASBESTOS CONTENT OF THESE MATERIALS.

FIGURE 4 OF 4

LOCATION:

2050 JANE STREET
NORTH YORK, ONTARIO

BUILDING NAME:

RADIO AND ELECTRONIC SERVICES

EAST SECOND FLOOR PLAN
ASBESTOS-CONTAINING MATERIAL LOCATIONS

CLIENT			CITY OF TORONTO
PROJECT NUMBER:	DATE:	NOVEMBER 2013	DRW BY: J.B.
PINCHIN FILE NUMBER	SCALE:	NOT TO SCALE	CHK BY: M.S.
83714.003			

