

FINAL

Designated Substances Survey Report

Police Warehouse & Office
Building
330 Progress Ave., Toronto, ON

Prepared for:

The City of Toronto

Facilities Management
55 John Street, 2nd Floor
Toronto ON

Attention: Sara Reid
Environmental Project Manager

December 9, 2015

Pinchin File: 103037



Designated Substances Survey Report

Police Warehouse & Office Building
330 Progress Ave., Toronto, ON
The City of Toronto

December 9, 2015

Pinchin File: 103037

FINAL

Issued to: The City of Toronto
Contact: Sara Reid
Environmental Project Manager
Issued on: December 9, 2015
Pinchin file: 103037
Issuing Office: 50 Wellington Street East, Suite
200, Toronto, ON M5E 1C8
Primary Contact: Juliette McIntyre

Reviewer: Juliette McIntyre
Senior Project Manager
jmcintyre@pinchin.com

Reviewer: Mark Stroombergen, C.E.T.
Director, GTA - Hazardous Materials
mstroombergen@pinchin.com



Designated Substances Survey Report

Police Warehouse & Office Building
330 Progress Ave., Toronto, ON
The City of Toronto

December 9, 2015

Pinchin File: 103037

FINAL

EXECUTIVE SUMMARY

The City of Toronto (Client) retained Pinchin Ltd. (Pinchin) to conduct a Designated Substance survey of Police Warehouse & Office Building located at 330 Progress Ave., Toronto, ON. The survey was performed on May 7, 2015.

The objective of the survey was to document the locations of specified Designated Substances, polychlorinated biphenyls (PCBs) and mould, evaluate their condition, and develop corrective action plans as required for the purposes of long term management. The results of this survey are not intended for construction, renovation, demolition or project tendering purposes.

The survey area consisted of the entire building. The building was occupied at the time of the survey.

SUMMARY OF FINDINGS

Asbestos: Asbestos-containing materials (ACM) were confirmed or assumed to be present as follows:

- Drywall throughout the building (assumed);
- Roofing material (assumed);
- Caulking (assumed).

Lead: Lead may be present in emergency light batteries and is assumed present in paints.

Silica: Crystalline silica is present in concrete, mortar, brick, masonry, ceramics, asphalt, etc., where present in the building.

Mercury: Mercury vapour is present in fluorescent lamps throughout the building.

SUMMARY OF RECOMMENDATIONS

The following is a summary of significant recommendations; refer to the body of the report for detailed recommendations.

1. Perform a pre-construction survey and remove all ACM prior to alteration or maintenance work or if ACM may be disturbed by the work.
2. Remove and dispose of mercury-containing items when taken out of service.
3. Follow appropriate safe work procedures when handling or disturbing asbestos, lead, mercury and silica.

Please refer to Section 4.0 of this report for detailed recommendations regarding administrative and remedial actions.



Designated Substances Survey Report

Police Warehouse & Office Building
330 Progress Ave., Toronto, ON
The City of Toronto

December 9, 2015

Pinchin File: 103037

FINAL

This Executive Summary is subject to the same standard limitations as contained in the report and must be read in conjunction with the entire report.



Designated Substances Survey Report

Police Warehouse & Office Building
330 Progress Ave., Toronto, ON
The City of Toronto

December 9, 2015

Pinchin File: 103037

FINAL

TABLE OF CONTENTS

1.0	INTRODUCTION AND SCOPE	1
1.1	Scope of Survey	1
2.0	BACKGROUND INFORMATION	2
2.1	Building Description	2
2.2	Inaccessible Locations	2
3.0	FINDINGS	3
3.1	Asbestos	3
3.2	Lead	6
3.3	Silica	7
3.4	Mercury	7
3.5	Polychlorinated Biphenyls	7
3.6	Mould	8
4.0	RECOMMENDATIONS	8
4.1	General	8
4.2	On-going Management and Maintenance	8
5.0	LIMITATIONS	9
6.0	REFERENCES	9

APPENDICES

APPENDIX I	Drawings
APPENDIX II-A	Asbestos Analytical Certificates
APPENDIX II-B	Lead Analytical Certificates
(No Information to Report)	
APPENDIX II-C	PCB Analytical Certificates
(No Information to Report)	
APPENDIX III	Methodology
APPENDIX IV	Photographs
(No Information to Report)	
APPENDIX V	Survey Form



1.0 INTRODUCTION AND SCOPE

The City of Toronto (Client) retained Pinchin Ltd. (Pinchin) to conduct a Designated Substances Survey of Police Warehouse & Office Building, located at 330 Progress Ave., Toronto, ON.

The survey was performed by John Edwards, B.A., PCEM, Senior Project Technologist on May 7, 2015.

The surveyor was accompanied by a representative from the City of Toronto during the survey. The building was occupied at the time of the survey.

The objective of the survey was to document the locations of specified Designated Substances, polychlorinated biphenyls (PCBs) and mould, evaluate their condition, and develop corrective action plans as required. This survey is only to be used for the purposes of long term management and routine maintenance. The results of this survey are not to be used for construction, renovation, demolition or project tendering purposes.

1.1 Scope of Survey

The survey was performed to review the location and type of specified hazardous building materials present in the building.

For the purpose of the survey and this report, hazardous building materials include the following Designated Substances:

- Asbestos
- Lead
- Silica
- Mercury

The survey also included:

- Polychlorinated Biphenyls (PCBs)
- Mould

The following Ontario Designated Substances are not typically found in building materials in a composition/state that is hazardous and were not included in this survey:

- Arsenic
- Acrylonitrile
- Benzene
- Coke oven emissions



Designated Substances Survey Report

Police Warehouse & Office Building
330 Progress Ave., Toronto, ON
The City of Toronto

December 9, 2015

Pinchin File: 103037

FINAL

- Ethylene oxide
- Isocyanates
- Vinyl chloride monomer

2.0 BACKGROUND INFORMATION

2.1 Building Description

Item	Details
Building Use	Police Services
Number of Floors/Levels	2 stories
Total Area of Building (Square Feet)	200,000
Year of Construction	2001
Structure	Structural steel, concrete
Exterior Cladding	Pre-cast concrete
HVAC	Rooftop units
Roof	Built-up roofing
Flooring	Ceramic tile, carpet, vinyl sheet flooring, concrete
Interior Walls	Drywall, concrete block
Ceilings	Drywall, acoustic ceiling tile

2.2 Inaccessible Locations

The following rooms or areas of the building were not accessible to the surveyor and are therefore not included in the report:

Area or Room	Reason
Location 1-20	Locked, unauthorized access
Location 1-21	Locked, unauthorized access
Location 1-27	Locked, unauthorized access
Location 1-28	Locked, unauthorized access

Area or Room	Reason
Location 1-29	Locked, unauthorized access
Location 1-53	Locked, unauthorized access
Location 1-70	Locked, unauthorized access

3.0 FINDINGS

3.1 Asbestos

3.1.1 Suspect Building Materials Not Found

The following types of building materials may historically contain asbestos but were not observed in the building and are not discussed in the report findings:

- Texture finishes (acoustic/decorative)
- Plaster
- Asbestos cement products
- Vinyl floor tiles and mastic
- Firestopping
- Levelling Compound

3.1.2 Spray-Applied Fireproofing and Thermal Insulation

Non-asbestos fireproofing and overspray is present on the structure throughout the office area (Samples: 2015-A0002A-G).



Photo #1: Non-asbestos spray fireproofing

3.1.3 Thermal Systems Insulation (TSI)

3.1.3.1 Pipe Insulation

Non-asbestos insulation (e.g. fiberglass) is present on pipes throughout the assessed area.



Photo #2: Non-asbestos fiberglass pipe insulation

3.1.3.2 Duct Insulation

Ducts are either uninsulated or insulated with non-asbestos fiberglass and jacketed with foil.



Photo #3: Non-asbestos fiberglass duct insulation

3.1.3.3 Mechanical Equipment Insulation

Mechanical equipment is either uninsulated or insulated with non-asbestos fiberglass



Photo #4: Non-asbestos fiberglass mechanical insulation

3.1.4 Acoustic Ceiling Tiles

One distinct type of acoustic ceiling tile is present in the assessed area, as follows:

Size, Type, Pattern, Photo #	Sample Number or Date Code	Asbestos Type
ACT01: 24"x48", lay-in, pinholes and pocks, Photo #5	2015-A0001A-C 04/11/13 date stamp	None detected



Photo #5: ACT01, non-asbestos acoustic ceiling tiles, 24"x48" pinholes and pocks (Samples: 2015-A0001A-C)

3.1.5 Drywall Joint Compound

Drywall (gypsum board) and drywall joint compound is present as a wall and ceiling finish throughout the building. All drywall was observed to be in good condition and was not sampled. Assume all drywall is asbestos-containing.

3.1.6 Vinyl Sheet Flooring

Vinyl sheet flooring is present as follows:

Pattern, Colour and Photo Number	Paper Backing (Yes/No)	Locations (Quantity)	Sample Number	Asbestos Type
VSF01 – light blue	unknown	Refer to Survey Form in Appendix V	Not sampled	Assumed ACM
VSF02 – grey	Unknown	Refer to Survey Form in Appendix V	Not sampled	Assumed

The vinyl sheet flooring is non-friable but can become friable upon removal. Vinyl sheet flooring is in good condition.



Photo 5: VSF01



Photo 7: VSF02

3.1.7 Assumed Asbestos Materials

A number of materials which might contain asbestos were not sampled during our survey due to limitations in scope and methodology. Where present, these materials must be assumed to be an asbestos material and are best sampled during project planning and preparation of contract documents for their removal. Materials assumed to contain asbestos include:

- roofing, felts and tar
- concrete floor levelling compound
- elevator and lift brakes
- electrical components or wiring within control centers, breakers, motors or lights, insulation on wiring
- vermiculite in concrete block wall cavities
- adhesives and duct mastics
- caulking
- mechanical packing, ropes and gaskets
- fire resistant doors

3.2 Lead

3.2.1 Paints

All painted surfaces were observed to be in good condition; therefore no paint chip samples were collected. Assume that all paint is lead-containing.

3.2.2 *Lead Products and Applications*

Lead-containing batteries may be present in emergency lighting present throughout building.



Photo #8: Emergency lighting with lead-containing battery

3.2.3 *Assumed Lead Materials*

Lead may be present in a number of materials which were not assessed and/or sampled. The following materials, where found, should be considered to contain lead.

- electrical components, including wiring connectors, fibre optic cable sheathing, grounding conductors, and solder

3.3 **Silica**

Crystalline silica is assumed component of the following building materials where present in the building:

- poured or pre-cast concrete
- masonry and mortar
- ceramic tiles, grout

3.4 **Mercury**

3.4.1 *Lamps*

Mercury vapour is present in fluorescent lamps where present in the assessed area.

3.4.2 *Mercury-Containing Devices*

Mercury-containing devices were not found during the survey.

3.5 **Polychlorinated Biphenyls**

3.5.1 *Lighting Ballasts*

Based on the age of the building (i.e., 2001) light ballasts are not suspect to contain PCBs.



3.5.2 Transformers

Based on the age of the building (i.e. 2001) transformers are not suspected to contain PCBs.

3.6 Mould

Visible mould growth was not found in the assessed area.

4.0 RECOMMENDATIONS

4.1 General

Perform a detailed intrusive survey prior to building renovation or demolition operations. The survey should include; destructive testing (i.e. coring and/or removal of building finishes and components), and sampling of materials not previously tested (i.e. roofing materials, caulking, mastics).

4.2 On-going Management and Maintenance

The following recommendations are made regarding on-going management and maintenance work involving the hazardous materials identified.

4.2.1 Asbestos

Perform an assessment of asbestos materials on an annual basis. The next assessment of ACM should be performed prior to May 7, 2015 to remain in compliance.

Remove all asbestos-containing materials (ACM) prior to alteration or maintenance work or if ACM may be disturbed by the work. Follow appropriate asbestos precautions for the classification of work being performed.

Update the asbestos inventory report upon completion of any abatement and removal of asbestos-containing materials.

4.2.2 Lead

Disturbance of lead in paint and coatings (or other materials) during maintenance activities may result in over-exposure to lead dust or fumes. The need for work procedures, engineering controls and personal protective equipment will need to be assessed on a project-by-project basis and must comply with provincial standards or guidelines. Performing an exposure assessment during work that disturbs lead in paints and coatings may be able to alleviate the use of some of the precautions specified by these standards or guidelines.

Lead-containing items (lead-acid batteries) should be recycled when taken out of service.



Designated Substances Survey Report

Police Warehouse & Office Building
330 Progress Ave., Toronto, ON
The City of Toronto

December 9, 2015

Pinchin File: 103037

FINAL

4.2.3 Silica

Disturbance of silica-containing products during maintenance activities may result in excessive exposures to airborne silica, especially if performed indoors and dry. Cutting, grinding, drilling or demolition of materials containing silica should be completed only with proper respiratory protection and other worker safety precautions that comply with provincial standards or guidelines.

4.2.4 Mercury

Recycle and reclaim mercury from fluorescent light tubes and thermostats when taken out of service. Do not break lamps or separate liquid mercury from components. Light tubes are accepted free of charge at many local recycling depots.

5.0 LIMITATIONS

The work performed by Pinchin was conducted in accordance with the City of Toronto Contract Number 47018468, effective July 31, 2014.

6.0 REFERENCES


The following legislation and documents were referenced in completing the survey and this report:

1. Asbestos on Construction Projects and in Buildings and Repair Operations, Ontario Regulation 278/05.
2. Designated Substances, Ontario Regulation 490/09.
3. Lead on Construction Projects, Ministry of Labour Guidance Document.
4. Ministry of the Environment Regulation, R.R.O. 1990 Reg. 347 as amended.
5. Surface Coating Materials Regulations, SOR/2005-109, Hazardous Products Act.
6. Silica on Construction Projects, Ministry of Labour Guidance Document.
7. Alert – Mould in Workplace Buildings, Ontario Ministry of Labour.
8. Standard Operating Procedures for Designated Substance Surveys, dated April, 2014, City of Toronto, Facilities Management.

\\pinchin.com\m\iss\Job\103000s\103037 CITYOFTORONTO\VariousLocati\DSUB\ASSMT\Toronto Police Services\330 Progress Avenue\Report\FINAL\330 Progress Ave_DSS_2015.docx

Template: Master Report for Hazardous Materials Assessment Report (Tablet Management), Haz, December 10, 2014

APPENDIX I
Drawings

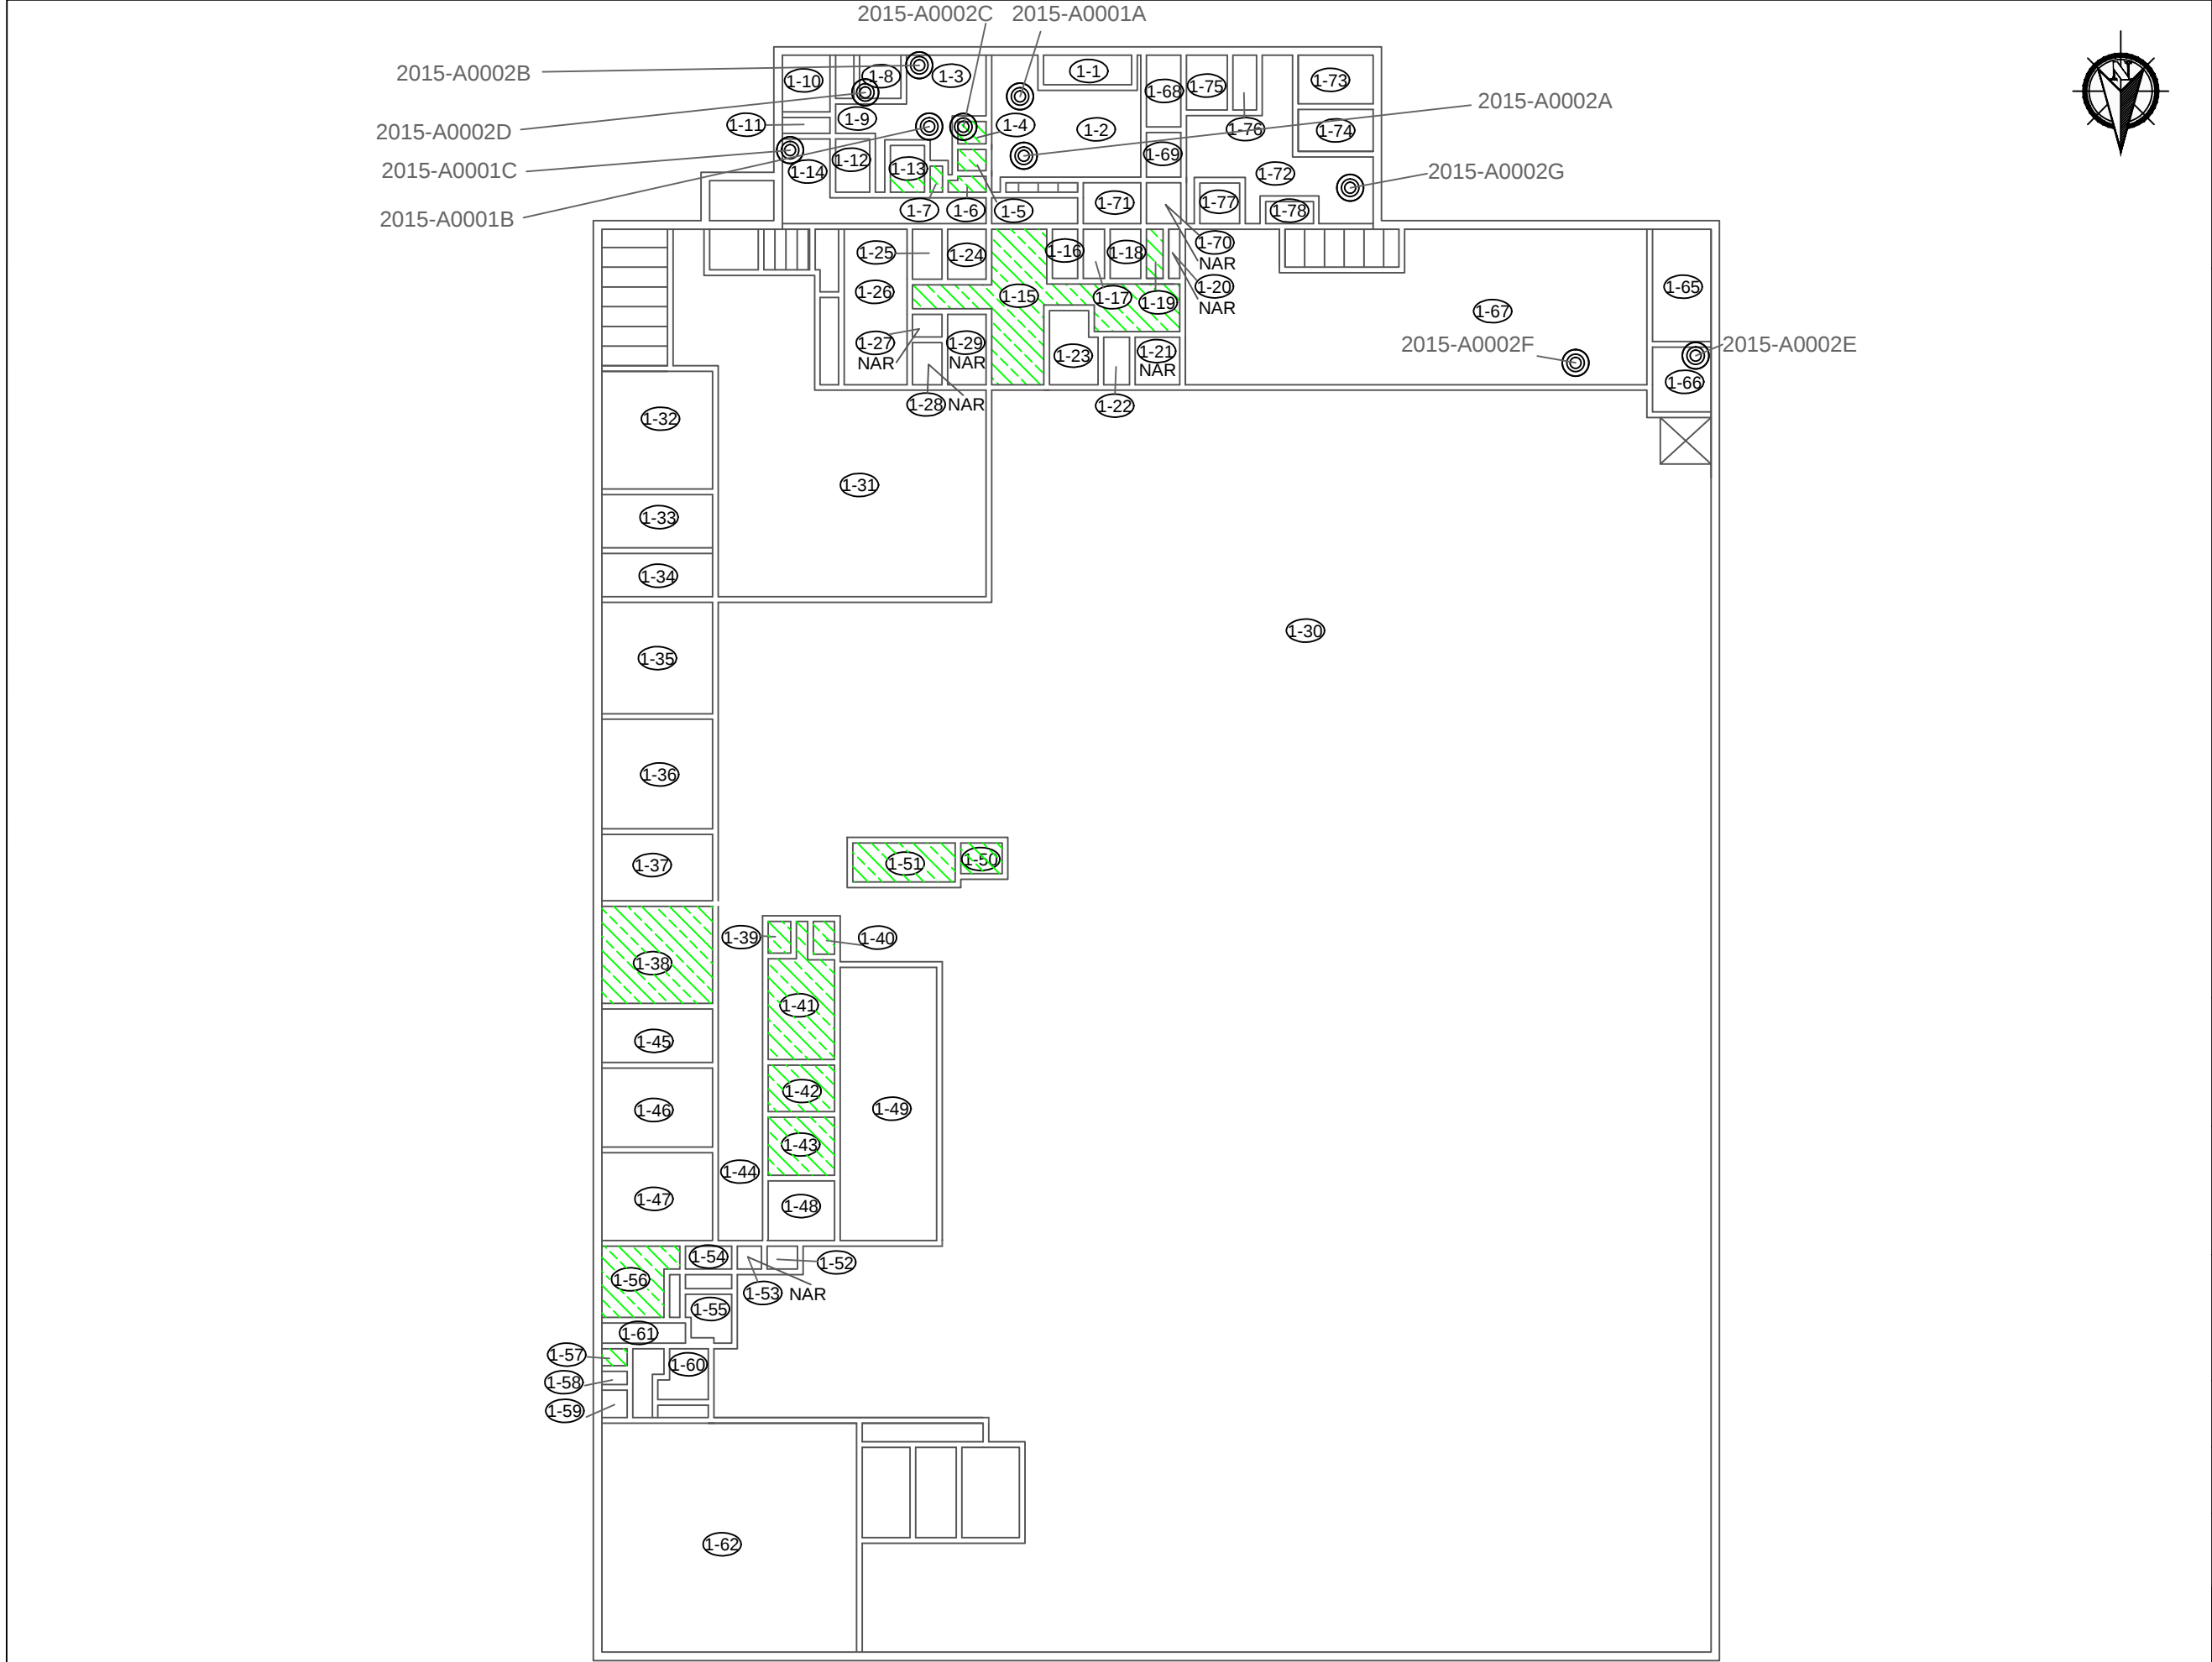



LEGEND:

-  PINCHIN LOCATION NUMBER
-  ASBESTOS BULK SAMPLE LOCATION
- NAR NO ACCESS TO ROOM/AREA
-  CONFIRMED AND/OR ASSUMED ASBESTOS-CONTAINING MATERIAL

NOT ALL KNOWN OR SUSPECTED DESIGNATED SUBSTANCES MAY BE DEPICTED ON THE DRAWING. REFER TO THE DESIGNATED SUBSTANCES REPORT FOR A COMPLETE LIST OF KNOWN AND SUSPECTED HAZARDOUS BUILDING MATERIALS.

LEGEND IS COLOUR DEPENDENT. NON-COLOUR COPIES MAY ALTER INTERPRETATION.

CLIENT:

CITY OF TORONTO


LOCATION:

POLICE WAREHOUSE & OFFICE BUILDING
330 PROGRESS AVENUE
TORONTO, ON

TITLE:

DESIGNATED SUBSTANCES
SURVEY
GROUND FLOOR

DATE:	2015/05/07	PROJECT # :	103037
DRAWN BY:	BW	DRAWING:	1 OF 2
CHECKED BY:	JM		
SCALE:	NTS		

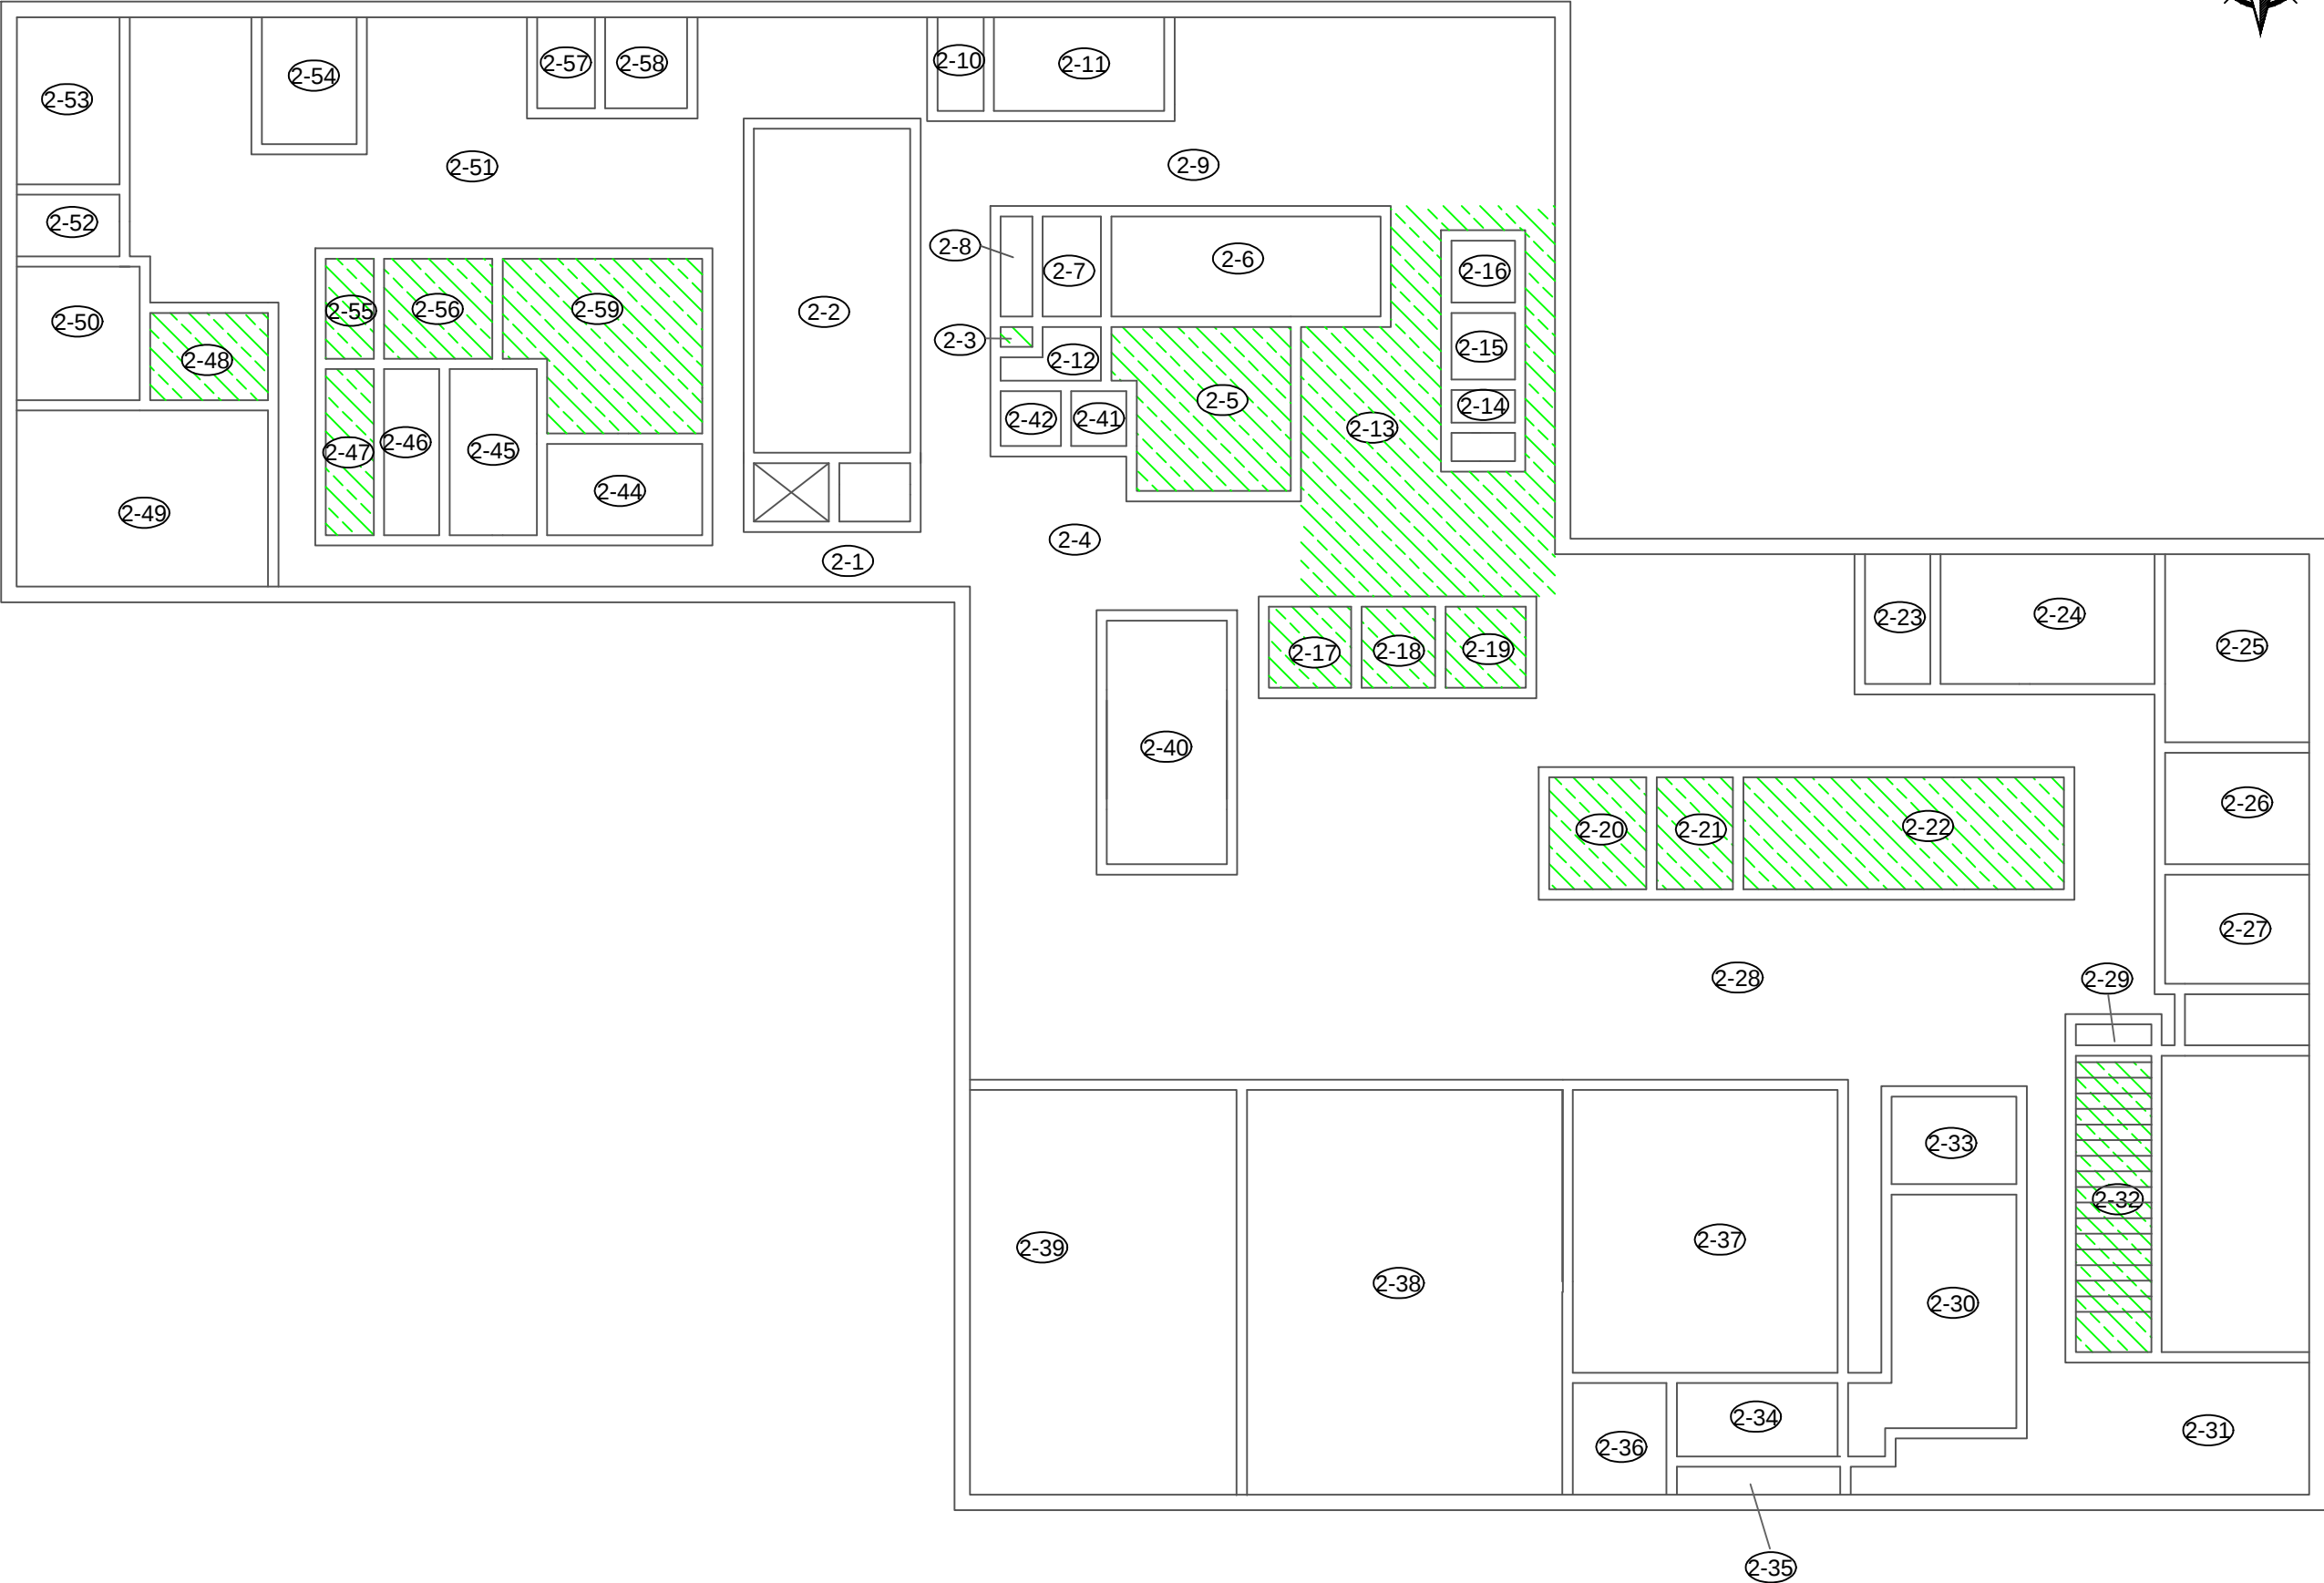

- LEGEND:
- (X) PINCHIN LOCATION NUMBER
 - ⊙ ASBESTOS BULK SAMPLE LOCATION
 - NAR NO ACCESS TO ROOM/AREA
 - CONFIRMED AND/OR ASSUMED ASBESTOS-CONTAINING MATERIAL

NOT ALL KNOWN OR SUSPECTED DESIGNATED SUBSTANCES MAY BE DEPICTED ON THE DRAWING. REFER TO THE DESIGNATED SUBSTANCES REPORT FOR A COMPLETE LIST OF KNOWN AND SUSPECTED HAZARDOUS BUILDING MATERIALS.

LEGEND IS COLOUR DEPENDENT. NON-COLOUR COPIES MAY ALTER INTERPRETATION.

CLIENT:

CITY OF TORONTO

LOCATION:

POLICE WAREHOUSE & OFFICE BUILDING
330 PROGRESS AVENUE
TORONTO, ON

TITLE:

DESIGNATED SUBSTANCES
SURVEY
SECOND FLOOR

DATE:	PROJECT # :
2015/05/07	103037

DRAWN BY:	DRAWING:
BW	2 OF 2

CHECKED BY:
JM

SCALE:
NTS

APPENDIX II-A
Asbestos Analytical Certificates



Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and 600/M4-82-020



NVLAP Lab Code: 200664-0

Customer: Pinchin Ltd.
50 Wellington Street East
Suite 200
Toronto ON M5E 1C8

Attn: John Edwards
Juliette McIntyre

Lab Order ID: 1509033
Analysis ID: 1509033_PLM
Date Received: 5/11/2015
Date Reported: 5/16/2015

Project: 103037, City of Toronto, 330 Progress Ave., Toronto, ON

Sample ID	Description	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes
Lab Sample ID	Lab Notes				Treatment
2015-A A0001A	ACT01 - Acoustic Ceiling Tile, 24"x48", pinhole and pocks, date stamped 04/11/13,	None Detected	40% Cellulose 40% Fiber Glass	10% Perlite 10% Other	White, Gray Fibrous Homogeneous
1509033PLM_1					Ashed, Teased
2015-A A0001B	ACT01 - Acoustic Ceiling Tile, 24"x48", pinhole and pocks, date stamped 04/11/13,	None Detected	40% Cellulose 40% Fiber Glass	10% Perlite 10% Other	White, Gray Fibrous Homogeneous
1509033PLM_2					Ashed, Teased
2015-A A0001C	ACT01 - Acoustic Ceiling Tile, 24"x48", pinhole and pocks, date stamped 04/11/13,	None Detected	40% Cellulose 40% Fiber Glass	10% Perlite 10% Other	White, Gray Fibrous Homogeneous
1509033PLM_3					Ashed, Teased
2015-A A0002A	Fireproofing on Beam, Deck & Joist, Location 1-02	None Detected	80% Mineral Wool	20% Other	Gray Fibrous Homogeneous
1509033PLM_4					Teased, Crushed
2015-A A0002B	Fireproofing on Beam, Deck & Joist, Location 1-03	None Detected	80% Mineral Wool	20% Other	Gray Fibrous Homogeneous
1509033PLM_5					Teased, Crushed
2015-A A0002C	Fireproofing on Beam, Deck & Joist, Location 1-04	None Detected	80% Mineral Wool	20% Other	Gray Fibrous Homogeneous
1509033PLM_6					Teased, Crushed
2015-A A0002D	Fireproofing on Beam, Deck & Joist, Location 1-08	None Detected	80% Mineral Wool	20% Other	Gray Fibrous Homogeneous
1509033PLM_7					Teased, Crushed
2015-A A0002E	Fireproofing on Beam, Deck & Joist, Location 1-66	None Detected	40% Cellulose	60% Other	Gray Fibrous Homogeneous
1509033PLM_8					Teased

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogeneous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Estimated MDL is 0.1%.

Bethany Nichols (10)

Analyst

Approved Signatory



Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and 600/M4-82-020



Customer: Pinchin Ltd.
50 Wellington Street East
Suite 200
Toronto ON M5E 1C8

Attn: John Edwards
Juliette McIntyre

Project: 103037, City of Toronto, 330 Progress Ave., Toronto, ON

Lab Order ID: 1509033
Analysis ID: 1509033_PLM
Date Received: 5/11/2015
Date Reported: 5/16/2015

Sample ID	Description	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes
Lab Sample ID	Lab Notes				Treatment
2015-A A0002F	Fireproofing on Beam, Deck & Joist, Location 1-67	None Detected	40% Cellulose	60% Other	Gray Fibrous Homogeneous
1509033PLM_9					Teased
2015-A A0002G	Fireproofing on Beam, Deck & Joist, Location 1-72	None Detected	40% Cellulose	60% Other	Gray Fibrous Homogeneous
1509033PLM_10					Teased

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogeneous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Estimated MDL is 0.1%.

Bethany Nichols (10)

Analyst

Approved Signatory

1509033

Version 1-15-2012

Client: Pinchin Ltd.
Contact: John Edwards / Juliette McIntyre
 50 Wellington Street East, Suite
 200, Toronto, ON M5E 1C8
Address:
Phone: 416-368-6555
Fax: 416-368-4120
Email: jedwards@pinchin.com
jmcintyre@pinchin.com
Project: 103037, City of Toronto, 330
 Progress Ave., Toronto, ON
Client Notes:

P.O. #. 103037
Date Submitted: May 8 2015
Analysis: PLM - Stop Positive
TurnAroundTime: 4 days

***Instructions:**
 Use Column "B" for your contact info

To See an Example Click the
 bottom Example Tab.

Enter samples between "<<" and ">>"

Begin Samples with a "<<" above the first sample
 and end with a ">>" below the last sample.
 Only Enter your data on the first sheet "Sheet1"

Note: Data 1 and Data 2 are optional
 fields that do not show up on the official
 report, however they will be included
 in the electronic data returned to you
 to facilitate your reintegration of the report data.

Invoice to:

Contact name here

Email address here

Scientific
 Analytical
 Institute



4604 Dundas Dr.
 Greensboro, NC 27407
 Phone: 336.292.3888
 Fax: 336.292.3313
 Email: lab@sailab.com

Sample Number	Data 1 (Lab use only)	Sample Description	Data 2 (Lab use only)
<<			
2015-A A0001A		ACT01 - Acoustic Ceiling Tile, 24"x48", pinhole and pocks, date stamped 04/11/13, Location 1-02	
2015-A A0001B		ACT01 - Acoustic Ceiling Tile, 24"x48", pinhole and pocks, date stamped 04/11/13, Location 1-03	
2015-A A0001C		ACT01 - Acoustic Ceiling Tile, 24"x48", pinhole and pocks, date stamped 04/11/13, Location 1-14	
2015-A A0002A		Fireproofing on Beam, Deck & Joist, Location 1-02	
2015-A A0002B		Fireproofing on Beam, Deck & Joist, Location 1-03	
2015-A A0002C		Fireproofing on Beam, Deck & Joist, Location 1-04	
2015-A A0002D		Fireproofing on Beam, Deck & Joist, Location 1-08	
2015-A A0002E		Fireproofing on Beam, Deck & Joist, Location 1-66	
2015-A A0002F		Fireproofing on Beam, Deck & Joist, Location 1-67	
2015-A A0002G		Fireproofing on Beam, Deck & Joist, Location 1-72	
>>			

B. Inley 5/11 930A

Accepted ☒

Rejected ☐

APPENDIX II-B
Lead Analytical Certificates
(No Information to Report)

APPENDIX II-C
PCB Analytical Certificates
(No Information to Report)

APPENDIX III
Methodology



1.0 GENERAL

The following survey methodology is based on the requirements of the *Standard Operation Procedure for Designated Substance Surveys*, dated April, 2014, provided by the City of Toronto (the "SOP").

Pinchin conducted a room-by-room survey (rooms, corridors, service areas, exterior, etc.) to identify the hazardous building materials as defined in Section 1.1. Information regarding the approximate quantity, location, and condition of hazardous building materials encountered and visually estimated quantities were recorded on the *Survey Form*, provided by the City of Toronto, found in Appendix V. The locations of any samples collected were recorded on small-scale plans, found in Appendix I.

Drawings (i.e., floor plans), previous reports, and Survey Forms, were referenced where provided.

1.1 Limitations on Scope

The survey excludes the following:

- Owner or occupant articles (e.g. stored items, furniture, appliances, etc.);
- Underground materials or equipment (e.g. vessels, drums, underground storage tanks, pipes, etc.);
- Building envelope, structural components, inaccessible or concealed materials or other items where sampling may cause consequential damage to the property.
- Energized systems (e.g. internal boiler components, elevators, mechanical or electrical components);
- Controlled products (e.g. stored chemicals, operational or process-related substances); and
- Materials not typically associated with construction (e.g. settled dust, spills, residual contamination from prior spills, etc.).

The survey was limited to non-intrusive testing. Concealed spaces such as those above solid ceilings and within shafts and pipe chases were accessed via existing access panels only. Pinchin did not conduct demolition of walls, solid ceilings, structural items, interior finishes or exterior building finishes, to determine the presence of concealed materials.

1.2 Asbestos

Pinchin conducted an inspection for the presence of friable and non-friable asbestos-containing materials (ACM). A friable material is a material that when dry can be crumbled, pulverized or powdered by hand pressure.



Pinchin collected samples at a rate that is in compliance with Table 1 of O.Reg. 278/05. A separate set of samples was collected of each of homogenous material sampled. A homogenous material is defined by the US EPA¹ as material that is uniform in texture and appearance, was installed at one time, and is unlikely to consist of more than one type or formulation of material. The homogeneous materials are determined by visual examination, available information on the phases of the construction and prior renovations.

The following materials were sampled:

- All friable materials historically known to contain asbestos, regardless of year of installation, not identified in previous reports;
- Friable materials previously sampled in insufficient quantity to conclude the materials are non-asbestos, in accordance with the requirements of O.Reg. 278/05;
- Friable materials previously reported to contain less than 1% asbestos, if sampled prior to the Ministry of Labour defining an asbestos-containing material as a material containing contains 0.5 percent or more asbestos by weight;
- Non-friable acoustic ceiling tiles;
- Non-friable vinyl floor tiles and mastic.

The following materials were **not** sampled:

- Materials previously identified in previous reports provided as asbestos-containing;
- Materials previously confirmed to be non-asbestos in accordance with O.Reg. 278/05;
- Unless damaged the following materials were not sampled: plaster, drywall joint compound, mastic, window caulking, roofing materials, vinyl sheet flooring. Materials not sampled are assumed to contain asbestos.
- Materials where sampling poses an inherent, imminent danger to the Assessor such as high voltage wiring, materials present at heights greater than 12 feet, or those in confined spaces. These materials are assumed to be asbestos-containing.

In some cases, manufactured products such as asbestos cement pipe are visually identified without sample confirmation.

¹ Environmental Protection Agency



Pinchin submits the bulk samples to a NVLAP² accredited laboratory for analysis. The analysis is performed in accordance with Test Method EPA/600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials, July 1993.

The asbestos analysis is completed using a stop positive approach. Only one result of greater than the regulated criteria (0.5%) is required to determine that a material is asbestos-containing, but all samples must be analyzed to conclusively determine that a material is non-asbestos. The laboratory stops analyzing samples from a homogeneous material once a result greater than the regulated criteria is detected in any of the samples of that material. All samples of a homogeneous material are analyzed if no asbestos is detected. In some cases, all samples are analyzed in the sample set regardless of result. Where building materials are described in the report as non-asbestos, or described as containing no asbestos, this is subject to the limitations of the analytical method used, and should be understood to mean no asbestos was detected.

Asbestos materials are evaluated in order to make recommendations regarding remedial work. The priority for remedial action is based on several factors:

- friability (friable or non-friable).
- condition (good, fair, poor, debris, based on definitions in the SOP).
- accessibility (ranking from accessible to all building users to inaccessible).
- visibility (whether the material is obscured by other building components).
- efficiency of the work (for example, if damaged ACM is being removed in an area, it may be most practical to remove all ACM in the area even if it is in good condition).

This includes friability, condition and efficiency and practicality of the work.

1.3 Lead

Pinchin collected samples of damaged paint not identified in a previous report. Drawings included show sample locations.

Analysis for lead in paints or surface coatings is performed in accordance with EPA Method No. 3050B/Method No. 7420; flame atomic absorption at an accredited laboratory.

For this report, all paints containing lead at a concentration 0.1% or greater are discussed. Paint was evaluated for condition.

² National Voluntary Laboratory Accreditation Program



Lead building products (e.g. batteries, lead sheeting, flashing) are identified by visual observation only.

1.4 Silica

Pinchin identifies building materials suspected of containing crystalline silica (e.g. concrete, cement, tile, brick, masonry, mortar) by knowledge of current and historic applications and visual inspection only.

Pinchin does not perform sampling of these materials for laboratory analysis of crystalline silica content.

1.5 Mercury

Building materials/products/equipment (e.g. thermostats, barometers, pressure gauges, light tubes), suspected to contain mercury were identified by visual inspection only. Dismantling of equipment suspected of containing mercury was not performed. Sampling of these materials for laboratory analysis of mercury content was not performed.

Mercury spills or damaged mercury-containing equipment was recorded where observed.

1.6 Polychlorinated Biphenyls

Pinchin determines the potential for light ballast and wet transformers to contain PCBs based on the age of the building, a review of maintenance records and examination of labels or nameplates on equipment, where present and accessible. The information is compared to known ban dates of PCBs and Environment Canada publications.

Dry type transformers are assumed to be free of dielectric fluids and hence non-PCB.

Pinchin records spills or leakage of suspect PCB-containing fluids where observed or identified in historical documents.

Fluids (mineral oil, hydraulic or Askaral) in transformers or other equipment are not sampled for PCB content.

Non-liquid forms of PCBs (i.e. sealants or caulking) are not sampled for PCB content.

1.7 Visible Mould

Pinchin identifies the presence of mould if visibly present in a significant quantity on exposed building surfaces. If any mould growth is concealed within wall cavities it is not addressed in this survey.

APPENDIX IV

Photographs

(No Information to Report)

APPENDIX V
Survey Form

APPENDIX V - SURVEY FORM

Building Address		330 Progress Ave.	Date(s) of Current Reassessment:		May 7, 2015				
Building Name		Police Warehouse and Office Building	Organization completing Asbestos Reassessment:		Pinchin Ltd. - John Edwards				
Summary of Findings: Added asbestos samples for ACT01 (2015-A0001A-C) and spray fireproofing (2015-A0002A-C)									
Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
0-00	Exterior	Roof	Roofing Material	Asbestos	Not Sampled	ACM Assumed	10000 SF	Good	
0-00	Exterior	Windows	Window Caulking	Asbestos	Not Sampled	ACM Assumed	100 SF	Good	
1-1	Vestibule	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-1	Vestibule	Walls	Ceramic Tile	Drywall	Not Sampled	ACM Assumed	30 SF	Good	
1-1	Vestibule	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	10 SF	Good	
1-2	Front Lobby	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-2	Front Lobby	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	200 SF	Good	
1-2	Front Lobby	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-2	Front Lobby	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-3	Office Area	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-3	Office Area	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-3	Office Area	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-3	Office Area	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-3	Office Area	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-4	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF01 - Blue

APPENDIX V - SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>Building System</i>	<i>Material Observed</i>	<i>Potential Hazardous Material</i>	<i>Sample ID</i>	<i>Analytical Result</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-4	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-4	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-4	Office	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-5	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF01 - Blue
1-5	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-5	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-5	Office	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-6	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF01 - Blue
1-6	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-6	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-6	Office	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-7	Copy Room	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF01 - Blue
1-7	Copy Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	400 SF	Good	
1-7	Copy Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-7	Copy Room	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-8	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-8	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-8	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-8	Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-8	Office	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	

APPENDIX V - SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>Building System</i>	<i>Material Observed</i>	<i>Potential Hazardous Material</i>	<i>Sample ID</i>	<i>Analytical Result</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-09	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-9	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-9	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-9	Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-9	Office	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-10	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-10	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-10	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-10	Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-10	Office	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-11	Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-11	Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-11	Washroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-11	Washroom	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-12	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-12	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-12	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-12	Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-12	Office	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-13	Valuables	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF01 - Blue
1-13	Valuables	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-13	Valuables	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
1-13	Valuables	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-14	Lunchroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-14	Lunchroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1200 SF	N/A	
1-14	Lunchroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-14	Lunchroom	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with canvas jacketing
1-14	Lunchroom	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-15	Corridor	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	150 sf	Good	VSF01 - Blue
1-15	Corridor	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	150 sf	Good	VSF02 - Grey
1-15	Corridor	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-15	Corridor	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-15	Corridor	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-15	Corridor	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-16	Video Room	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-16	Video Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-16	Video Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-17	Security Room	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-17	Security Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-17	Security Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-18	Main Telecom Room	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-18	Main Telecom Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-18	Main Telecom Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-19	Health & Safety Room	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	50 sf	Good	VSF01 - Blue

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
1-19	Health & Safety Room	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	50 sf	Good	VSF02 - Grey
1-19	Health & Safety Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-19	Health & Safety Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-19	Health & Safety Room	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-19	Health & Safety Room	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-20	Fire Suppression								No access in 2015
1-21	Electrical Room								No access in 2015
1-22	Women's Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-22	Women's Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-22	Women's Washroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-23	Men's Washroom / Locker Room	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-23	Men's Washroom / Locker Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1000 SF	Good	
1-23	Men's Washroom / Locker Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-24	Men's Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-24	Men's Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	500 SF	Good	
1-24	Men's Washroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-25	Women's Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-25	Women's Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	500 SF	Good	
1-25	Women's Washroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-26	Meeting Room	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-26	Meeting Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2500 SF	Good	
1-26	Meeting Room	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-27	A/V Equipment Room								No access in 2015

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
1-28	Elec./Data								No access in 2015
1-29	Storage								No access in 2015
1-30	Warehouse	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-30	Warehouse	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-30	Warehouse	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-30	Warehouse	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-31	FPS Receiving/Shipping	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-31	FPS Receiving/Shipping	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-31	FPS Receiving/Shipping	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-31	FPS Receiving/Shipping	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-32	Loading Dock	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-32	Loading Dock	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-32	Loading Dock	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-32	Loading Dock	Mechanical	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-33	Loading Dock	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-33	Loading Dock	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-33	Loading Dock	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-33	Loading Dock	Mechanical	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-34	Loading Dock	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-34	Loading Dock	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-34	Loading Dock	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-34	Loading Dock	Mechanical	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-35	Loading Dock	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-35	Loading Dock	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-35	Loading Dock	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-35	Loading Dock	Mechanical	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
1-36	Loading Dock	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-36	Loading Dock	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-36	Loading Dock	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-36	Loading Dock	Mechanical	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-37	Loading Dock	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-37	Loading Dock	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-37	Loading Dock	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-37	Loading Dock	Mechanical	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-38	Project Room	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	200sf	Good	VSF02 - Grey
1-38	Project Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1000 SF	Good	
1-38	Project Room	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-38	Project Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-39	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF02 - Grey
1-39	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	200 SF	Good	
1-39	Office	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-39	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-39	Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-40	Copy Room	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	150 sf	Good	VSF02 - Grey
1-40	Copy Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	400 SF	Good	
1-40	Copy Room	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-40	Copy Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-40	Copy Room	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-41	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	200 sf	Good	VSF02 - Grey
1-41	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	200 SF	Good	
1-41	Office	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-41	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
1-41	Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-42	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF02 - Grey
1-42	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	200 SF	Good	
1-42	Office	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-42	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-42	Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-43	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF02 - Grey
1-43	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	200 SF	Good	
1-43	Office	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-43	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-43	Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-44	Corridor	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-44	Corridor	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-44	Corridor	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-44	Corridor	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-45	DLMS	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-45	DLMS	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-45	DLMS	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-45	DLMS	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-46	Loading Dock	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-46	Loading Dock	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-46	Loading Dock	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1000 SF	Good	
1-46	Loading Dock	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
1-47	Bulk Storage / Awaiting Destruction	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-47	Bulk Storage / Awaiting Destruction	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-47	Bulk Storage / Awaiting Destruction	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-48	Bulk Storage	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-48	Bulk Storage	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-48	Bulk Storage	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-49	Bulk Storage	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-49	Bulk Storage	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-49	Bulk Storage	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-50	Lunchroom	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	200 sf	Good	VSF02 - Grey
1-50	Lunchroom	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-50	Lunchroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	400 SF	Good	
1-50	Lunchroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-50	Lunchroom	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-51	Warehouse Group Leader's Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	125 sf	Good	VSF02 - Grey
1-51	Warehouse Group Leader's Office	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-51	Warehouse Group Leader's Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	800 SF	Good	
1-51	Warehouse Group Leader's Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-51	Warehouse Group Leader's Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-52	Sub Telecom Room	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-52	Sub Telecom Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	200 SF	Good	
1-52	Sub Telecom Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	50 SF	Good	

APPENDIX V - SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>Building System</i>	<i>Material Observed</i>	<i>Potential Hazardous Material</i>	<i>Sample ID</i>	<i>Analytical Result</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-53	Hot Water Tank								No access in 2015
1-54	Women's Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-54	Women's Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-54	Women's Washroom	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	150 SF	Good	
1-54	Women's Washroom	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with canvas jacketing
1-55	Men's Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-55	Men's Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-55	Men's Washroom	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	150 SF	Good	
1-55	Men's Washroom	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with canvas jacketing
1-56	Employee Break Room	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	125 sf	Good	VSF02 - Grey
1-56	Employee Break Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1200 SF	Good	
1-56	Employee Break Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-56	Employee Break Room	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-57	Building Maintenance	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	50 sf	Good	VSF02 - Grey
1-57	Building Maintenance	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	200 SF	Good	
1-57	Building Maintenance	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-57	Building Maintenance	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-58	Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-58	Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	200 SF	Good	
1-58	Washroom	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	75 SF	Good	
1-59	Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-59	Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	200 SF	Good	
1-59	Washroom	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	75 SF	Good	
1-60	Zamboni Storage	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	

APPENDIX V - SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>Building System</i>	<i>Material Observed</i>	<i>Potential Hazardous Material</i>	<i>Sample ID</i>	<i>Analytical Result</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-60	Zamboni Storage	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-60	Zamboni Storage	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-60	Zamboni Storage	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with canvas jacketing
1-60	Zamboni Storage	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-61	Laundry	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-61	Laundry	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
1-61	Laundry	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	150 SF	Good	
1-61	Laundry	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-62	Vehicle Storage	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-62	Vehicle Storage	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-62	Vehicle Storage	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-63	Loading Dock	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-63	Loading Dock	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-63	Loading Dock	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-64	Main Electrical Room								No access in 2015
1-65	Water Meter Room	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-65	Water Meter Room	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-65	Water Meter Room	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-65	Water Meter Room	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with canvas jacketing
1-65	Water Meter Room	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-66	Corridor	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-66	Corridor	Walls	Concrete / Concrete Block	N/A	N/A	N/A	N/A	N/A	

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
1-66	Corridor	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	150 SF	Good	
1-66	Corridor	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-66	Corridor	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-67	Vacant	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
1-67	Vacant	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
1-67	Vacant	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	4000 SF	Good	
1-67	Vacant	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
1-67	Vacant	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-68	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-68	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	400 SF	Good	
1-68	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-68	Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-68	Office	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-69	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-69	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	400 SF	Good	
1-69	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-69	Office	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-69	Office	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-70	Mail Room								No access in 2015
1-71	Stairwell	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
1-71	Stairwell	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	800 SF	Good	
1-71	Stairwell	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks

APPENDIX V - SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>Building System</i>	<i>Material Observed</i>	<i>Potential Hazardous Material</i>	<i>Sample ID</i>	<i>Analytical Result</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
1-71	Stairwell	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-71	Stairwell	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-72	Vacant Office Area	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-72	Vacant Office Area	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-72	Vacant Office Area	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-72	Vacant Office Area	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-72	Vacant Office Area	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-73	Office (under construction)	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-73	Office (under construction)	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-73	Office (under construction)	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-73	Office (under construction)	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-73	Office (under construction)	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-74	Office (under construction)	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-74	Office (under construction)	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-74	Office (under construction)	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-74	Office (under construction)	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-74	Office (under construction)	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-75	Office (under construction)	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-75	Office (under construction)	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-75	Office (under construction)	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-75	Office (under construction)	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-75	Office (under construction)	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-76	Office (under construction)	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-76	Office (under construction)	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-76	Office (under construction)	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-76	Office (under construction)	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
1-76	Office (under construction)	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-77	Office (under construction)	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-77	Office (under construction)	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-77	Office (under construction)	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-77	Office (under construction)	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-77	Office (under construction)	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
1-78	Office (under construction)	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
1-78	Office (under construction)	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
1-78	Office (under construction)	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
1-78	Office (under construction)	Duct	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with foil jacketing
1-78	Office (under construction)	Structure	Spray Fireproofing	Asbestos	2015-A0002A-G	None detected	N/A	N/A	
2-1	Corridor	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-1	Corridor	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
2-1	Corridor	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-2	Training Room	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-2	Training Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
2-2	Training Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-3	LAN Room	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-3	LAN Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
2-3	LAN Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-4	Reception - Parking Enforcement	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-4	Reception - Parking Enforcement	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
2-4	Reception - Parking Enforcement	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-5	Copy Room	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	300 sf	Good	VSF02 - Grey
2-5	Copy Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	800 SF	Good	
2-5	Copy Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
2-6	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-6	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1500 SF	Good	
2-6	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-7	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-7	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-7	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-8	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-8	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	400 SF	Good	
2-8	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-9	Cubicle Area	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-9	Cubicle Area	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1500 SF	Good	
2-9	Cubicle Area	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-10	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-10	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-10	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-11	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-11	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	800 SF	Good	
2-11	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-12	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-12	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-12	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-13	File Storage / Kitchenette	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	350 sf	Good	VSF02 - Grey
2-13	File Storage / Kitchenette	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-13	File Storage / Kitchenette	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-14	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-14	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1500 SF	Good	

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
2-14	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-15	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-15	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1500 SF	Good	
2-15	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-16	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-16	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1500 SF	Good	
2-16	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-17	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF02 - Grey
2-17	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-17	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-18	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF02 - Grey
2-18	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-18	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-19	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF02 - Grey
2-19	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-19	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-20	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF02 - Grey
2-20	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-20	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-21	LAN Room	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF02 - Grey
2-21	LAN Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	500 SF	Good	
2-21	LAN Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-22	Area Supervisor	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	225 s f	Good	VSF02 - Grey
2-22	Area Supervisor	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1000 SF	Good	
2-22	Area Supervisor	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-23	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	

APPENDIX V - SURVEY FORM

<i>Location Number</i>	<i>Location Name</i>	<i>Building System</i>	<i>Material Observed</i>	<i>Potential Hazardous Material</i>	<i>Sample ID</i>	<i>Analytical Result</i>	<i>Quantity</i>	<i>Condition</i>	<i>Notes/Required Action</i>
2-23	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-23	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-24	PKE Boardroom	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-24	PKE Boardroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-24	PKE Boardroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-25	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-25	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	900 SF	Good	
2-25	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-26	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-26	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	700 SF	Good	
2-26	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-27	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-27	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	800 SF	Good	
2-27	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-28	Corridor	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-28	Corridor	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
2-28	Corridor	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-28	Corridor	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with canvas jacketing
2-29	Janitor's Room	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-29	Janitor's Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	200 SF	Good	
2-29	Janitor's Room	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
2-29	Janitor's Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-30	Evidence Storage	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-30	Evidence Storage	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
2-30	Evidence Storage	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-30	Evidence Storage	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with canvas jacketing

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
2-31	Lunchroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-31	Lunchroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	2000 SF	Good	
2-31	Lunchroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-31	Lunchroom	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with canvas jacketing
2-32	Stairwell	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	200 sf	Good	VSF02 - Grey
2-32	Stairwell	Walls	Concrete Block	N/A	N/A	N/A	N/A	N/A	
2-32	Stairwell	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
2-33	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-33	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	800 SF	Good	
2-33	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-34	Admin. Storage	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
2-34	Admin. Storage	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	400 SF	Good	
2-34	Admin. Storage	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
2-34	Admin. Storage	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with PVC jacketing
2-35	TAGs Storage	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
2-35	TAGs Storage	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	400 SF	Good	
2-35	TAGs Storage	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
2-35	TAGs Storage	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with PVC jacketing
2-36	WIPS Storage	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
2-36	WIPS Storage	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	400 SF	Good	
2-36	WIPS Storage	Ceiling	N/A	N/A	N/A	N/A	N/A	N/A	
2-36	WIPS Storage	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with PVC jacketing
2-37	Parade Room	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-37	Parade Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	3000 SF	Good	
2-37	Parade Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-38	Men's Changeroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
2-38	Men's Changeroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	4000 SF	Good	
2-38	Men's Changeroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-38	Men's Changeroom	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with PVC jacketing
2-39	Women's Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-39	Women's Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	3000 SF	Good	
2-39	Women's Washroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-39	Women's Washroom	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with PVC jacketing
2-40	Electrical Room	Floor	Concrete	N/A	N/A	N/A	N/A	N/A	
2-40	Electrical Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	300 SF	Good	
2-40	Electrical Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-40	Electrical Room	Other	Transformer	PCB	Visually Assessed	Non-PCB	N/A	N/A	Dry type transformer
2-41	Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-41	Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	300 SF	Good	
2-41	Washroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-42	Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-42	Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	300 SF	Good	
2-42	Washroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-43	Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-43	Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	300 SF	Good	
2-43	Washroom	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	150 SF	Good	
2-44	Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-44	Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	300 SF	Good	
2-44	Washroom	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	150 SF	Good	
2-45	Janitor's Closet	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-45	Janitor's Closet	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	300 SF	Good	
2-45	Janitor's Closet	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	150 SF	Good	

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
2-45	Janitor's Closet	Pipe	Insulation - fiberglass	N/A	N/A	N/A	N/A	N/A	Fiberglass insulation with PVC jacketing
2-46	Washroom	Floor	Ceramic Tile	N/A	N/A	N/A	N/A	N/A	
2-46	Washroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	300 SF	Good	
2-46	Washroom	Ceiling	Drywall	Asbestos	Not Sampled	ACM Assumed	150 SF	Good	
2-47	WIPS Project Room	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	75 sf	Good	VSF02 - Grey
2-47	WIPS Project Room	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-47	WIPS Project Room	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-48	Risk Management Lab	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	75 sf	Good	VSF02 - Grey
2-48	Risk Management Lab	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-48	Risk Management Lab	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-49	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-49	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	1000 SF	Good	
2-49	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-50	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-50	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	900 SF	Good	
2-50	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-51	Cubicle Area	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-51	Cubicle Area	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	3000 SF	Good	
2-51	Cubicle Area	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-52	Unit Commander Boardroom	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-52	Unit Commander Boardroom	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	500 SF	Good	
2-52	Unit Commander Boardroom	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-53	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-53	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	800 SF	Good	
2-53	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-54	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	

APPENDIX V - SURVEY FORM

Location Number	Location Name	Building System	Material Observed	Potential Hazardous Material	Sample ID	Analytical Result	Quantity	Condition	Notes/Required Action
2-54	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	800 SF	Good	
2-54	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-55	Kitchen	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF02 - Grey
2-55	Kitchen	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-55	Kitchen	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-56	Office	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	100 sf	Good	VSF02 - Grey
2-56	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-56	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-57	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-57	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	800 SF	Good	
2-57	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-58	Office	Floor	Carpet	N/A	N/A	N/A	N/A	N/A	
2-58	Office	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	800 SF	Good	
2-58	Office	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
2-59	Storage	Floor	Vinyl Sheet Flooring	Asbestos	Not Sampled	ACM Assumed	250 sf	Good	VSF02 - Grey
2-59	Storage	Walls	Drywall	Asbestos	Not Sampled	ACM Assumed	600 SF	Good	
2-59	Storage	Ceiling	Acoustic Ceiling Tile	Asbestos	2015-A0001A-C	None detected	N/A	N/A	ACT01: 24"x48" pinholes and pocks
Surveyor's Field Notes									
NAC - No access above ceiling									