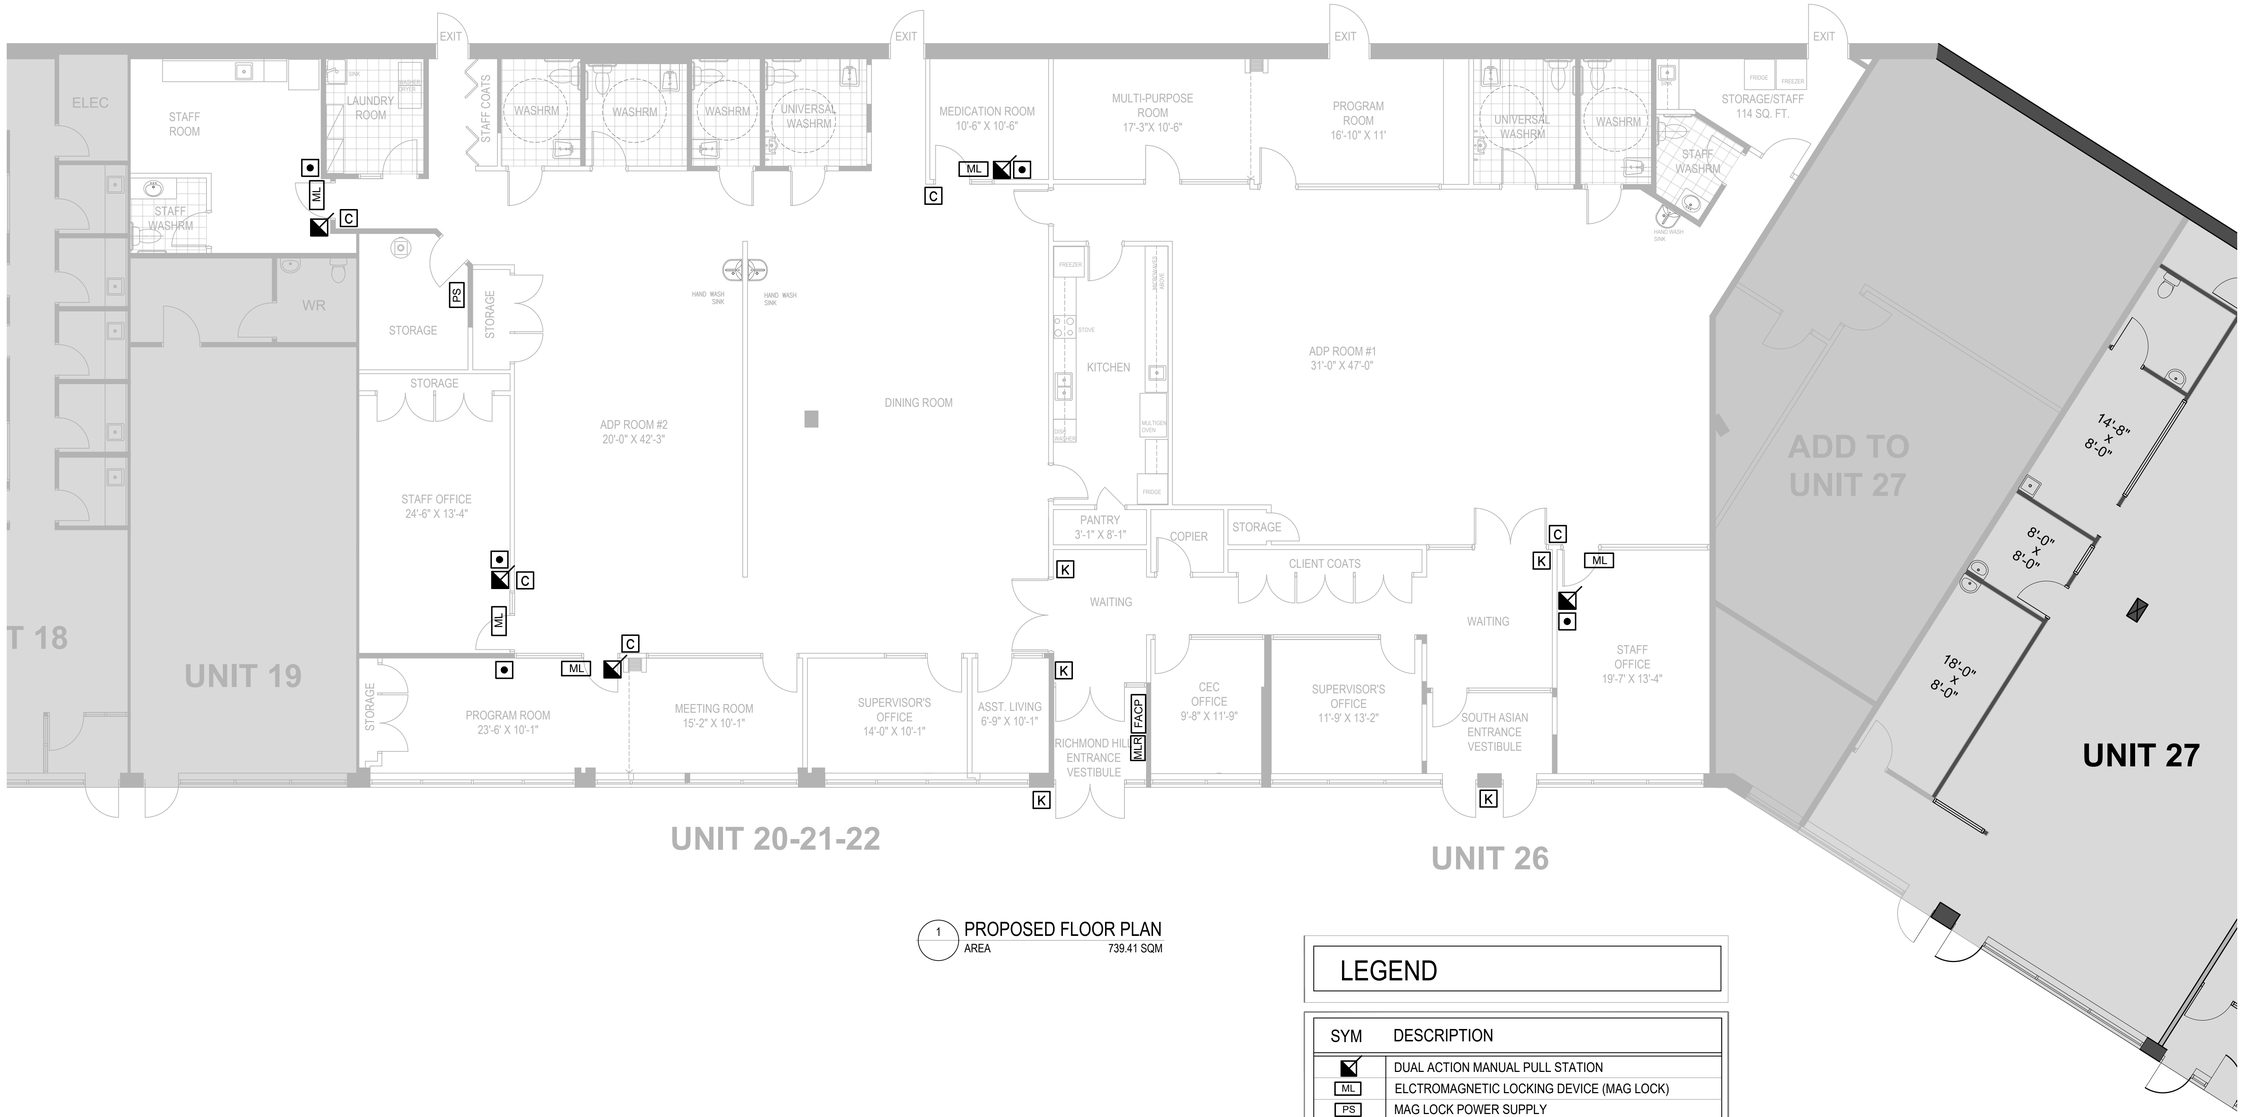


1 PROPOSED FLOOR PLAN
AREA 739.41 SQM

LEGEND

SYM	DESCRIPTION
	DUAL ACTION MANUAL PULL STATION
ML	ELCTROMAGNETIC LOCKING DEVICE (MAG LOCK)
PS	MAG LOCK POWER SUPPLY
FACP	FIRE ALARM CONTROL PANEL
MLR	MAG LOCK RELEASING KEY
C	CARD READER
	MAG LOCK RELEASING PUSH BUTTON
K	KEY PAD LOCK
	END OF LINE DEVICE

ALL INTELLECTUAL PROPERTY RIGHTS (INCLUDING, WITHOUT LIMITATION, ALL COPYRIGHT AND DESIGN RIGHTS) SUBSISTING IN THE CURRENT SET OF DRAWINGS AND RELATED INFORMATION BELONG TO KALGREENS ARCHITECTS INC.

THE ACCOMPANYING FILES/DRAWINGS/ REPORTS ARE IN NO WAY TO BE TAKEN AS BELONGING TO, ASSOCIATED WITH OR AS A REPLACEMENT OF COPIES OF THE OFFICIALLY SEALED DOCUMENTS. THE DATA IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND EITHER EXPRESSED OR IMPLIED. ANY PERSON[S] OR ORGANIZATION[S] MAKING USE OF OR RELYING UPON THIS DATA, USER IS RESPONSIBLE FOR CONFIRMING ITS ACCURACY AND COMPLETENESS.

THESE FILES DO NOT INCLUDE A PROFESSIONAL'S STAMP AND ONLY DRAWINGS WITH SUCH STAMPS ARE TO BE CONSIDERED AS TRUE AND FINAL. KALGREENS ARCHITECTS IS NOT RESPONSIBLE FOR EDITED OR REPRODUCED VERSIONS OF THIS DIGITAL DATA.

LAYOUT AND DIMENSIONS ARE PROVIDED FOR GENERAL INFORMATION ONLY. ALL CONDITIONS TO BE VERIFIED BY OTHERS.

DESIGNER'S STAMP

LICENCED PROFESSIONAL ENGINEER
N. U. KHAN
100046833
PROVINCE OF ONTARIO

GENERAL NOTES

ALL DRAWINGS ARE THE PROPERTY OF KALGREENS ARCHITECTS AND THEY ARE NOT TO BE REPRODUCED IN WHOLE OR IN PART WITHOUT WRITTEN CONSENT FROM KALGREENS ARCHITECTS INC.

CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS BEFORE COMMENCING WORK AND TO REPORT ANY DISCREPANCIES TO THE ENGINEER OR KALGREENS ARCHITECTS

ALL CONSTRUCTION TO BE ACCORDING TO BEST COMMON PRACTICE AND CONFORM TO THE ONTARIO BUILDING CODE.

NO.	ISSUED FOR	DATE
1	------	----/--/--

KALGREENS
ARCHITECTS INC
T: 1 (855)-585-8008
KBK@KALGREENS.COM
84 - 80 BIRMINGHAM ST.,
ETOBICOKE, ON. M8V 3W6

PROJECT ADDRESS
9325 YONGE STREET
RICHMOND HILL, ON

DRAWING
MAGLOCK FLOOR PLAN

DRAWN	MNGR.	DRAWING NO
TIN	KBK	ML-01

PLOTTED DATE
AUG 27, 2026


SCALE @24"X36"

CHECKED
KYLE KHADRA

MAGNETIC LOCKING AND ACCESS CONTROL SPECIFICATIONS

1. MAGNETIC LOCKING DEVICES: ALL NEW FIRE ALARM DEVICES, ELECTROMAGNETIC LOCKING DEVICES, CONTROL MODULES, POWER SUPPLIES, AND ASSOCIATED INTERFACE EQUIPMENT SHALL BE CERTIFIED, LISTED, OR APPROVED FOR THE INTENDED APPLICATION AND SHALL BE COMPATIBLE WITH THE EXISTING BASE BUILDING FIRE ALARM SYSTEM. ELECTROMAGNETIC LOCKING DEVICES AND ASSOCIATED EQUIPMENT SHALL BE SUPPLIED AND INSTALLED IN ACCORDANCE WITH THE ONTARIO BUILDING CODE, INCLUDING ARTICLE 3.4.6.16, THE ONTARIO ELECTRICAL SAFETY CODE, LATEST APPLICABLE EDITION, AND ALL OTHER APPLICABLE CODES AND STANDARDS.
2. FIRE ALARM MANUAL STATIONS: PROVIDE FIRE ALARM MANUAL STATIONS AT MAGLOCKED DOORS WHERE REQUIRED BY THE ONTARIO BUILDING CODE. WHERE REQUIRED BY OBC ARTICLE 3.4.6.16, THE MANUAL STATION SHALL BE LOCATED ON THE WALL WITHIN 600 MM OF THE MAGLOCKED DOOR AND SHALL CAUSE THE ELECTROMAGNETIC LOCKING DEVICE TO RELEASE IMMEDIATELY UPON OPERATION.
3. FIRE ALARM RELEASE: ELECTROMAGNETIC LOCKING DEVICES REQUIRED TO RELEASE BY THE FIRE ALARM SYSTEM SHALL RELEASE IMMEDIATELY UPON ACTIVATION OF THE APPLICABLE FIRE ALARM SIGNAL REQUIRED BY THE ONTARIO BUILDING CODE. FOR A TWO-STAGE FIRE ALARM SYSTEM, RELEASE SHALL OCCUR UPON THE ALERT SIGNAL, EXCEPT WHERE THE ONTARIO BUILDING CODE REQUIRES RELEASE UPON THE ALARM SIGNAL. FOR A SINGLE-STAGE FIRE ALARM SYSTEM, RELEASE SHALL OCCUR UPON THE ALARM SIGNAL.
4. MANUAL RELEASE: PROVIDE A MANUALLY OPERATED RELEASE SWITCH, READILY ACCESSIBLE ONLY TO AUTHORIZED PERSONNEL, LOCATED NEAR THE MAIN ENTRANCE OF THE BUILDING OR IN THE CENTRAL ALARM AND CONTROL FACILITY, AS REQUIRED BY THE ONTARIO BUILDING CODE. OPERATION OF THIS SWITCH SHALL IMMEDIATELY RELEASE ALL ELECTROMAGNETIC LOCKING DEVICES CONTROLLED BY THE SYSTEM.
5. CIRCUIT FAULT RELEASE: ELECTROMAGNETIC LOCKING DEVICES SHALL RELEASE IMMEDIATELY UPON DETECTION OF A FAULT IN THE ELECTRICAL CIRCUIT BETWEEN THE FIRE ALARM CONTROL PANEL AND THE CONTROLLER OF THE ELECTROMAGNETIC LOCKING DEVICE, WHERE REQUIRED BY THE ONTARIO BUILDING CODE.
6. POWER FAILURE RELEASE: ELECTROMAGNETIC LOCKING DEVICES SHALL RELEASE IMMEDIATELY UPON LOSS OF POWER TO THE FIRE ALARM CONTROL PANEL OR LOSS OF POWER CONTROLLING THE ELECTROMAGNETIC LOCKING DEVICE AND ITS ASSOCIATED AUXILIARY CONTROLS, AS REQUIRED BY THE ONTARIO BUILDING CODE.
7. LOCAL RELEASE / ACCESS CONTROL: WHERE INDICATED ON THE DRAWINGS, PROVIDE LOCAL RELEASE DEVICES, REQUEST-TO-EXIT DEVICES, CARD READERS, KEY SWITCHES, OR OTHER ACCESS CONTROL DEVICES. OPERATION OF THESE DEVICES SHALL RELEASE THE ASSOCIATED ELECTROMAGNETIC LOCKING DEVICE WITHOUT INTERFERING WITH THE REQUIRED FIRE ALARM RELEASE FUNCTIONS.
8. RESET OF MAGLOCKS: FOLLOWING RELEASE OF THE ELECTROMAGNETIC LOCKING DEVICES BY THE FIRE ALARM SYSTEM OR THE AUTHORIZED-PERSONNEL MANUAL RELEASE SWITCH, THE LOCKING DEVICES SHALL NOT AUTOMATICALLY RE-LOCK UNTIL THE SYSTEM HAS BEEN MANUALLY RESET BY OPERATION OF THE AUTHORIZED-PERSONNEL SWITCH, WHERE REQUIRED BY THE ONTARIO BUILDING CODE. COORDINATE RESET OPERATION WITH THE ACCESS CONTROL SYSTEM.
9. FIRE ALARM SYSTEM MODIFICATIONS: MODIFY THE FIRE ALARM SYSTEM AS REQUIRED TO ACCOMMODATE THE NEW ELECTROMAGNETIC LOCKING DEVICES, CONTROL MODULES, MONITORING FUNCTIONS, RELEASE FUNCTIONS, AND ASSOCIATED INTERFACES. PROVIDE ALL NECESSARY MODULES, RELAYS, POWER SUPPLIES, CIRCUITS, WIRING, PROGRAMMING, AND OTHER EQUIPMENT REQUIRED FOR A COMPLETE AND OPERATIONAL SYSTEM.
10. COMPATIBILITY: ALL NEW FIRE ALARM DEVICES SHALL BE COMPATIBLE WITH THE NEW FIRE ALARM CONTROL EQUIPMENT. PROVIDE DEVICES OF THE SAME MANUFACTURER AND SERIES AS THE FIRE ALARM SYSTEM WHERE REQUIRED FOR COMPATIBILITY AND APPROVED BY THE FIRE ALARM SYSTEM MANUFACTURER.
11. INSTALLATION AND VERIFICATION: INSTALL ALL NEW FIRE ALARM DEVICES AND ASSOCIATED WIRING IN ACCORDANCE WITH CAN/ULC-S524, INSTALLATION OF FIRE ALARM SYSTEMS, AS APPLICABLE. VERIFY THE FIRE ALARM SYSTEM IN ACCORDANCE WITH CAN/ULC-S537, VERIFICATION OF FIRE ALARM SYSTEMS, AND PROVIDE ALL REQUIRED DOCUMENTATION AND VERIFICATION REPORTS.
12. WIRING: PROVIDE NEW WIRING FOR ALL FIRE ALARM AND MAGLOCK INTERFACE CONNECTIONS. SIZE CONDUCTORS IN ACCORDANCE WITH THE FIRE ALARM SYSTEM MANUFACTURER'S REQUIREMENTS, APPLICABLE CAN/ULC REQUIREMENTS, AND THE ONTARIO ELECTRICAL SAFETY CODE. PROVIDE COPPER CONDUCTORS WITH INSULATION RATING SUITABLE FOR THE INSTALLATION. INSTALL WIRING IN CONDUIT WHERE INDICATED OR REQUIRED BY CODE AND THE ELECTRICAL SPECIFICATIONS.
13. MAGLOCK POWER SUPPLY: PROVIDE DEDICATED POWER SUPPLIES FOR ELECTROMAGNETIC LOCKING DEVICES AS REQUIRED. POWER SUPPLIES SHALL BE APPROVED FOR THE INTENDED APPLICATION AND SHALL BE INSTALLED IN ACCORDANCE WITH THE ONTARIO ELECTRICAL SAFETY CODE AND MANUFACTURER'S REQUIREMENTS. PROVIDE POWER SUPPLY MONITORING AND FIRE ALARM INTERFACE AS REQUIRED.
14. FIRE ALARM CONTRACTOR RESPONSIBILITY: THE FIRE ALARM CONTRACTOR SHALL BE RESPONSIBLE FOR ALL MODIFICATIONS TO THE NEW FIRE ALARM SYSTEM REQUIRED TO ACCOMMODATE THE WORK, INCLUDING ENGINEERING, EQUIPMENT, INSTALLATION, PROGRAMMING, TESTING, VERIFICATION, DOCUMENTATION, AND COORDINATION WITH THE ACCESS CONTROL CONTRACTOR.
15. ACCESS CONTROL COORDINATION: COORDINATE THE FIRE ALARM INTERFACE WITH THE ACCESS CONTROL CONTRACTOR. THE ACCESS CONTROL CONTRACTOR SHALL PROVIDE THE ELECTROMAGNETIC LOCKING DEVICES, ACCESS CONTROL EQUIPMENT, LOCAL RELEASE DEVICES, CARD READERS, REQUEST-TO-EXIT DEVICES, AND ASSOCIATED POWER SUPPLIES UNLESS OTHERWISE INDICATED. THE FIRE ALARM CONTRACTOR SHALL PROVIDE THE FIRE ALARM INTERFACE AND CONTROL FUNCTIONS INDICATED ON THE DRAWINGS.
16. DOOR SIGNAGE: WHERE REQUIRED BY THE ONTARIO BUILDING CODE, PROVIDE PERMANENT SIGNAGE ON THE DOOR INDICATING "EMERGENCY EXIT UNLOCKED BY FIRE ALARM". PROVIDE SIGNAGE IN ACCORDANCE WITH THE APPLICABLE CODE REQUIREMENTS.
17. EMERGENCY LIGHTING: PROVIDE EMERGENCY LIGHTING AT MAGLOCKED DOORS WHERE REQUIRED BY THE APPLICABLE BUILDING CODE, FIRE CODE, OR ELECTRICAL CODE. COORDINATE LOCATIONS WITH THE ELECTRICAL CONTRACTOR AND ARCHITECTURAL DRAWINGS.
18. TESTING AND COMMISSIONING: TEST ALL MAGLOCK RELEASE FUNCTIONS AS PART OF THE INTEGRATED FIRE ALARM TESTING. VERIFY OPERATION OF FIRE ALARM RELEASE, LOCAL MANUAL STATION RELEASE, AUTHORIZED-PERSONNEL RELEASE SWITCH, POWER-FAILURE RELEASE, CIRCUIT-FAULT RELEASE, ACCESS CONTROL RELEASE, AND MANUAL RESET FUNCTIONS, AS APPLICABLE. COORDINATE TESTING WITH THE ACCESS CONTROL CONTRACTOR AND INCLUDE THE RESULTS IN THE FIRE ALARM VERIFICATION AND INTEGRATED SYSTEM TESTING DOCUMENTATION.

1 TYPICAL SINGLE DOOR MAGNETIC LOCK LAYOUT

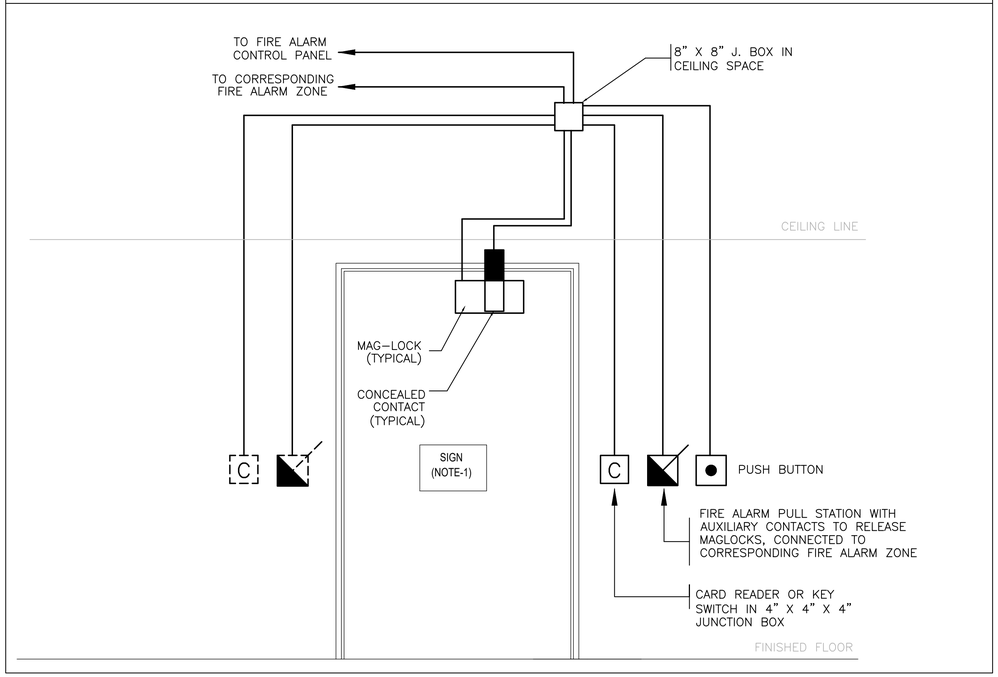

NOTE 1.

SUPPLY AND INSTALL SIGN PERMANTLY MOUNTED TO DOOR WITH THE WORDS "EMERGENCY EXIT UNLOCKED BY FIRE ALARM" LETTERING TO BE MINIMUM 25 MM HIGH WITH 5 MM STROKE.

ALL INTELLECTUAL PROPERTY RIGHTS (INCLUDING, WITHOUT LIMITATION, ALL COPYRIGHT AND DESIGN RIGHTS) SUBSISTING IN THE CURRENT SET OF DRAWINGS AND RELATED INFORMATION BELONG TO KALGREENS ARCHITECTS INC.

THE ACCOMPANYING FILES/DRAWINGS/ REPORTS ARE IN NO WAY TO BE TAKEN AS BELONGING TO, ASSOCIATED WITH OR AS A REPLACEMENT OF COPIES OF THE OFFICIALLY SEALED DOCUMENTS. THE DATA IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND EITHER EXPRESSED OR IMPLIED. ANY PERSON(S) OR ORGANIZATION(S) MAKING USE OF OR RELYING UPON THIS DATA, USER IS RESPONSIBLE FOR CONFIRMING ITS ACCURACY AND COMPLETENESS.

THESE FILES DO NOT INCLUDE A PROFESSIONAL'S STAMP AND ONLY DRAWINGS WITH SUCH STAMPS ARE TO BE CONSIDERED AS TRUE AND FINAL. KALGREENS ARCHITECTS IS NOT RESPONSIBLE FOR EDITED OR REPRODUCED VERSIONS OF THIS DIGITAL DATA

LAYOUT AND DIMENSIONS ARE PROVIDED FOR GENERAL INFORMATION ONLY. ALL CONDITIONS TO BE VERIFIED BY OTHERS.

DESIGNER'S STAMP

LICENCED PROFESSIONAL ENGINEER
N. U. KHAN
100046833
PROVINCE OF ONTARIO

GENERAL NOTES

ALL DRAWINGS ARE THE PROPERTY OF KALGREENS ARCHITECTS AND THEY ARE NOT TO BE REPRODUCED IN WHOLE OR IN PART WITHOUT WRITTEN CONSENT FROM KALGREENS ARCHITECTS INC.

CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS BEFORE COMMENCING WORK AND TO REPORT ANY DISCREPANCIES TO THE ENGINEER OR KALGREENS ARCHITECTS

ALL CONSTRUCTION TO BE ACCORDING TO BEST COMMON PRACTICE AND CONFORM TO THE ONTARIO BUILDING CODE.

NO.	ISSUED FOR	DATE
1	———	——/——/——

KALGREENS
ARCHITECTS INC

T: 1 (855)-585-8008
KBK@KALGREENS.COM
B4 - 80 BIRMINGHAM ST.,
ETOBICOKE, ON, M8V 3W6

PROJECT ADDRESS
9325 YONGE STREET
RICHMOND HILL, ON

DRAWING
MAGLOCKS SPECIFICATIONS AND DETAILS

DRAWN	MNGR.	DRAWING NO
TIN	KBK	
PLOTTED DATE: AUG 27, 2026		ML-02
SCALE: @24"X36"		
CHECKED: KYLE KHADRA		

CONSTRUCTION NOTES:

1. EXISTING CONDITIONS: THE CONSULTANT DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF EXISTING BUILDING CONDITIONS, DIMENSIONS, OR MATERIALS INDICATED ON THE DRAWINGS. EXISTING CONDITIONS SHOWN ARE PROVIDED FOR THE CONTRACTOR'S INFORMATION AND CONVENIENCE ONLY. THE CONTRACTOR SHALL, IN ACCORDANCE WITH THE TERMS AND CONDITIONS OF THE CONTRACT, VISIT THE PLACE OF THE WORK AND SURROUNDING AREAS AND THOROUGHLY INVESTIGATE EXISTING AS–BUILT CONDITIONS PRIOR TO SUBMITTING THE TENDER. THE CONTRACTOR SHALL FAMILIARIZE THEMSELVES WITH ALL APPARENT AND REASONABLY ACCESSIBLE CONDITIONS THAT MAY AFFECT THE WORK, INCLUDING, BUT NOT LIMITED TO, ABOVE–CEILING CONDITIONS AND EXISTING CONCEALED SERVICES WHERE ACCESS IS REASONABLY AVAILABLE. THE CONTRACTOR SHALL NOT RELY SOLELY ON THE CONTRACT DOCUMENTS TO DETERMINE THE EXTENT OF DEMOLITION, REMOVALS, MODIFICATIONS, OR NEW WORK REQUIRED. REPORT ANY DISCREPANCIES, CONFLICTS, OR UNFORESEEN CONDITIONS BETWEEN THE EXISTING CONDITIONS AND THE CONTRACT DOCUMENTS TO THE OWNER AND CONSULTANT PRIOR TO COMMENCING THE AFFECTED WORK.
2. DEMOLITION AND MAKING GOOD: THE CONTRACTOR SHALL COORDINATE AND EXECUTE ALL DEMOLITION AND REMOVAL WORK REQUIRED TO ACCOMMODATE THE NEW WORK, INCLUDING MODIFICATIONS ASSOCIATED WITH NEW PARTITIONS, CEILINGS, FLOOR FINISHES, EQUIPMENT, AND SERVICES. PATCH, REPAIR, AND MAKE GOOD ALL AFFECTED SURFACES AND FINISHES TO MATCH ADJACENT EXISTING CONSTRUCTION, UNLESS OTHERWISE INDICATED. PERFORM DEMOLITION AND OTHER NOISY WORK BETWEEN 9:00 A.M. AND 4:00 P.M., OR AT OTHER TIMES AS DIRECTED BY THE OWNER.
3. DEBRIS AND PROTECTION: REMOVE DEBRIS FROM THE WORK AREA AS IT ACCUMULATES AND MAINTAIN THE WORK AREA IN A CLEAN AND ORDERLY CONDITION. MAKE ACCEPTABLE ARRANGEMENTS WITH THE OWNER FOR THE COLLECTION, HANDLING, AND REMOVAL OF CONSTRUCTION REFUSE FROM THE SITE. PROTECT EXISTING CONSTRUCTION, FINISHES, EQUIPMENT, AND SERVICES DESIGNATED TO REMAIN. IMMEDIATELY REPAIR AND MAKE GOOD, AT THE CONTRACTOR'S EXPENSE, ANY DAMAGE CAUSED BY THE WORK.
4. FIRE SAFETY SYSTEMS: COORDINATE ALL WORK AFFECTING EXISTING FIRE ALARM, FIRE DETECTION, FIRE SUPPRESSION, EMERGENCY NOTIFICATION, AND OTHER LIFE SAFETY SYSTEMS WITH THE OWNER, AND AUTHORITIES HAVING JURISDICTION PRIOR TO COMMENCING THE AFFECTED WORK. WHERE FIRE PROTECTION OR LIFE SAFETY SYSTEMS ARE REQUIRED TO BE IMPAIRED OR SHUT DOWN, PROVIDE THE REQUIRED NOTIFICATIONS, TEMPORARY PROTECTION, AND SAFETY MEASURES IN ACCORDANCE WITH THE APPLICABLE CODES AND REQUIREMENTS OF THE AUTHORITIES HAVING JURISDICTION.
5. UNOCCUPIED BUILDING: THE BUILDING WILL REMAIN UNOCCUPIED THROUGHOUT THE CONSTRUCTION PERIOD. THE CONTRACTOR SHALL COORDINATE ACCESS, WORK AREAS, TEMPORARY SERVICES, SHUTDOWNS, AND OTHER CONSTRUCTION ACTIVITIES WITH THE OWNER. MAINTAIN SAFE ACCESS AND EGRESS FOR CONSTRUCTION PERSONNEL AND EMERGENCY RESPONDERS AT ALL TIMES.
6. EMERGENCY ACCESS AND EGRESS: MAINTAIN CLEAR AND UNOBSTRUCTED ACCESS TO REQUIRED EXITS, EXIT ACCESS ROUTES, STAIRS, FIRE ROUTES, FIRE DEPARTMENT ACCESS ROUTES, FIRE PROTECTION EQUIPMENT, AND OTHER LIFE SAFETY FEATURES THROUGHOUT CONSTRUCTION. DO NOT STORE MATERIALS, EQUIPMENT, TOOLS, OR DEBRIS IN AREAS REQUIRED FOR EMERGENCY ACCESS OR EGRESS. WHERE TEMPORARY CLOSURE OR ALTERATION OF AN EXIT OR EMERGENCY ACCESS ROUTE IS REQUIRED, PROVIDE AN ACCEPTABLE ALTERNATE ARRANGEMENT AND COORDINATE WITH THE OWNER, CONSULTANT, AND AUTHORITIES HAVING JURISDICTION PRIOR TO COMMENCING THE AFFECTED WORK.
7. SECURITY: MAINTAIN THE SECURITY OF THE BUILDING AND WORK AREA AT ALL TIMES. PREVENT UNAUTHORIZED ACCESS TO THE BUILDING AND WORK AREA. SECURE ALL EXTERIOR DOORS, WINDOWS, TEMPORARY OPENINGS, AND OTHER ACCESS POINTS WHEN THE WORK AREA IS NOT OCCUPIED BY THE CONTRACTOR.
8. COORDINATION: COORDINATE THE WORK OF ALL TRADES AND SUBCONTRACTORS TO ENSURE THAT DEMOLITION, REMOVALS, RELOCATIONS, NEW CONSTRUCTION, AND BUILDING SERVICES ARE PROPERLY SEQUENCED AND COMPLETED WITHOUT ADVERSELY AFFECTING EXISTING BUILDING OPERATIONS, FIRE PROTECTION, OR LIFE SAFETY SYSTEMS.

CONSTRUCTION CONTROL NOTES:

1. MATERIAL DELIVERIES: COORDINATE THE SUPPLY AND DELIVERY OF ALL MATERIALS WITH THE OWNER IN ADVANCE. DELIVERIES SHALL NOT BE MADE THROUGH THE MAIN BUILDING ENTRANCES, LOBBY, OR CONCOURSE EXCEPT WHERE APPROVED BY THE OWNER. DELIVERY ACCESS TO THE PLACE OF THE WORK SHALL BE THROUGH ACCESS ROUTES AND AREAS APPROVED BY THE OWNER. SCHEDULE LARGE DELIVERIES WITH THE OWNER IN ADVANCE. ALLOW FOR AFTER–HOURS DELIVERY OF LARGE OR DISRUPTIVE SHIPMENTS WHERE REQUIRED BY THE OWNER. DO NOT TRANSPORT MATERIALS OR EQUIPMENT IN AN ELEVATOR WHERE THE TOTAL LOAD EXCEEDS THE ELEVATOR'S RATED CAPACITY.
2. ACCESS AND LOADING AREAS: THE CONTRACTOR AND THEIR FORCES SHALL NOT PARK, STAGE VEHICLES, STORE MATERIALS, OR OTHERWISE OBSTRUCT BUILDING ENTRANCES, ACCESS ROUTES, FIRE ROUTES, LOADING AREAS, OR THE LOADING DOCK, EXCEPT AS SPECIFICALLY APPROVED BY THE OWNER.
3. CONTRACTOR PARKING: THE CONTRACTOR AND THEIR FORCES SHALL PARK ONLY IN AREAS DESIGNATED OR APPROVED BY THE OWNER. THE CONTRACTOR SHALL MAKE THEIR OWN ARRANGEMENTS FOR PARKING WHERE NO DESIGNATED PARKING IS PROVIDED.
4. MATERIAL STORAGE: THE CONTRACTOR AND THEIR FORCES SHALL NOT STORE MATERIALS, EQUIPMENT, TOOLS, OR CONSTRUCTION DEBRIS OUTSIDE THE DESIGNATED PLACE OF THE WORK. ALL MATERIALS AND EQUIPMENT SHALL BE STORED IN AREAS APPROVED BY THE OWNER.
5. ACCESS TO NON–WORK AREAS: THE CONTRACTOR AND THEIR FORCES SHALL COORDINATE AND SCHEDULE ALL ACCESS TO AREAS OUTSIDE THE PLACE OF THE WORK WITH THE OWNER IN ADVANCE. ACCESS SHALL BE LIMITED TO AREAS AND TIMES APPROVED BY THE OWNER.
6. BUILDING OPERATIONS: THE BUILDING WILL REMAIN UNOCCUPIED BY RESIDENTS, STAFF, AND THE PUBLIC DURING CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE ACCESS, WORK AREAS, TEMPORARY SERVICES, SHUTDOWNS, AND OTHER CONSTRUCTION ACTIVITIES WITH THE OWNER.
7. EMERGENCY ACCESS AND EGRESS: MAINTAIN SAFE, UNOBSTRUCTED, AND READILY ACCESSIBLE EMERGENCY ACCESS AND EGRESS FOR CONSTRUCTION PERSONNEL AT ALL TIMES. MAINTAIN ACCESS TO ALL REQUIRED EXITS, EXIT ACCESS ROUTES, STAIRS, FIRE ROUTES, FIRE DEPARTMENT ACCESS ROUTES, AND FIRE PROTECTION EQUIPMENT. DO NOT BLOCK OR OBSTRUCT EMERGENCY ACCESS ROUTES WITH MATERIALS, EQUIPMENT, VEHICLES, OR CONSTRUCTION DEBRIS.
8. EMERGENCY ACCESS: MAINTAIN ACCESS FOR EMERGENCY RESPONDERS AND EMERGENCY VEHICLES AT ALL TIMES. DO NOT OBSTRUCT FIRE DEPARTMENT ACCESS ROUTES, FIRE DEPARTMENT CONNECTIONS, HYDRANTS, FIRE ALARM ANNUNCIATORS, FIRE DEPARTMENT ACCESS DOORS, OR OTHER FIRE PROTECTION AND LIFE SAFETY EQUIPMENT. WHERE TEMPORARY OBSTRUCTIONS CANNOT BE AVOIDED, PROVIDE ALTERNATE ACCESS AS APPROVED BY THE OWNER AND AUTHORITIES HAVING JURISDICTION.
9. FIRE AND LIFE SAFETY: MAINTAIN THE INTEGRITY AND REQUIRED FIRE–RESISTANCE RATINGS OF ALL EXISTING FIRE SEPARATIONS AND FIRE–RATED ASSEMBLIES THROUGHOUT CONSTRUCTION. DO NOT OBSTRUCT, DISABLE, OR IMPAIR FIRE PROTECTION OR LIFE SAFETY SYSTEMS WITHOUT PRIOR APPROVAL FROM THE OWNER, CONSULTANT, AND AUTHORITIES HAVING JURISDICTION, AS APPLICABLE.
TEMPORARY CONDITIONS: WHERE CONSTRUCTION ACTIVITIES REQUIRE TEMPORARY CLOSURE, RELOCATION, OR MODIFICATION OF AN EXIT, EXIT ACCESS ROUTE, FIRE ROUTE, OR OTHER LIFE SAFETY FEATURE, PROVIDE APPROPRIATE TEMPORARY PROTECTION AND ACCESS AS REQUIRED. COORDINATE SUCH CONDITIONS WITH THE OWNER, CONSULTANT, AND AUTHORITIES HAVING JURISDICTION PRIOR TO COMMENCING THE AFFECTED WORK.

CUT AND PATCH WORK

1. CUTTING AND PATCHING: PROVIDE ALL CUTTING, PATCHING, CORING, DRILLING, REMOVALS, AND MAKING GOOD REQUIRED TO COMPLETE THE WORK INDICATED ON THE DRAWINGS AND SPECIFICATIONS. THE CONTRACTOR SHALL COORDINATE AND ASSIGN ALL CUTTING AND PATCHING WORK BETWEEN THE VARIOUS TRADES TO ENSURE THAT THE WORK IS COMPLETED PROPERLY AND WITHOUT CONFLICT.
2. MAKING GOOD: MAKE GOOD ALL FINISHES AFFECTED BY THE WORK, INCLUDING WALLS, CEILINGS, FLOORS, PARTITIONS, AND OTHER EXISTING SURFACES. REPAIR AND RESTORE ANY EXISTING CONSTRUCTION, FINISHES, OR SURFACES DAMAGED BY THE CONTRACTOR'S WORK TO MATCH ADJACENT EXISTING CONDITIONS, UNLESS OTHERWISE INDICATED.

ALL INTELLECTUAL PROPERTY RIGHTS (INCLUDING, WITHOUT LIMITATION, ALL COPYRIGHT AND DESIGN RIGHTS) SUBSISTING IN THE CURRENT SET OF DRAWINGS AND RELATED INFORMATION BELONG TO KALGREENS ARCHITECTS INC.

THE ACCOMPANYING FILES/DRAWINGS/ REPORTS ARE IN NO WAY TO BE TAKEN AS BELONGING TO, ASSOCIATED WITH OR AS A REPLACEMENT OF COPIES OF THE OFFICIALLY SEALED DOCUMENTS. THE DATA IS PROVIDED 'AS IS' WITHOUT WARRANTY OF ANY KIND EITHER EXPRESSED OR IMPLIED. ANY PERSON(S) OR ORGANIZATION(S) MAKING USE OF OR RELYING UPON THIS DATA, USER IS RESPONSIBLE FOR CONFIRMING ITS ACCURACY AND COMPLETENESS.

THESE FILES DO NOT INCLUDE A PROFESSIONAL'S STAMP AND ONLY DRAWINGS WITH SUCH STAMPS ARE TO BE CONSIDERED AS TRUE AND FINAL. KALGREENS ARCHITECTS IS NOT RESPONSIBLE FOR EDITED OR REPRODUCED VERSIONS OF THIS DIGITAL DATA

LAYOUT AND DIMENSIONS ARE PROVIDED FOR GENERAL INFORMATION ONLY. ALL CONDITIONS TO BE VERIFIED BY OTHERS.

DESIGNER'S STAMP

LICENCED PROFESSIONAL ENGINEER
N. U. KHAN
100046833
PROVINCE OF ONTARIO

GENERAL NOTES

ALL DRAWINGS ARE THE PROPERTY OF KALGREENS ARCHITECTS AND THEY ARE NOT TO BE REPRODUCED IN WHOLE OR IN PART WITHOUT WRITTEN CONSENT FROM KALGREENS ARCHITECTS INC.

CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS BEFORE COMMENCING WORK, AND TO REPORT ANY DISCREPANCIES TO THE ENGINEER OR KALGREENS ARCHITECTS

ALL CONSTRUCTION TO BE ACCORDING TO BEST COMMON PRACTICE AND CONFORM TO THE ONTARIO BUILDING CODE.

NO.	ISSUED FOR	DATE
1	———	——/——/——

KALGREENS
ARCHITECTS INC

T: 1 (855)-585-8008
KBK@KALGREENS.COM
84 - 80 BIRMINGHAM ST.,
ETOBICOKE, ON, M8V 3W6

PROJECT ADDRESS
9325 YONGE STREET
RICHMOND HILL, ON

DRAWING
MAGLOCKS SPECIFICATIONS AND NOTES

DRAWN	MNGR.	DRAWING NO
TIN	KBK	
PLOTTED DATE: AUG 27, 2026		ML-03
SCALE: @24"X36"		
CHECKED: KYLE KHADRA		